

Please go to www. quoizel. com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (4) Medium Base Bulbs 100W maximum.

Estimated Assembly Time: 30-45 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Note: This CONVERTIBLE fixture can be mounted as pendant light or semi-flush light. Refer to respective installation steps for installations.


⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.


Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

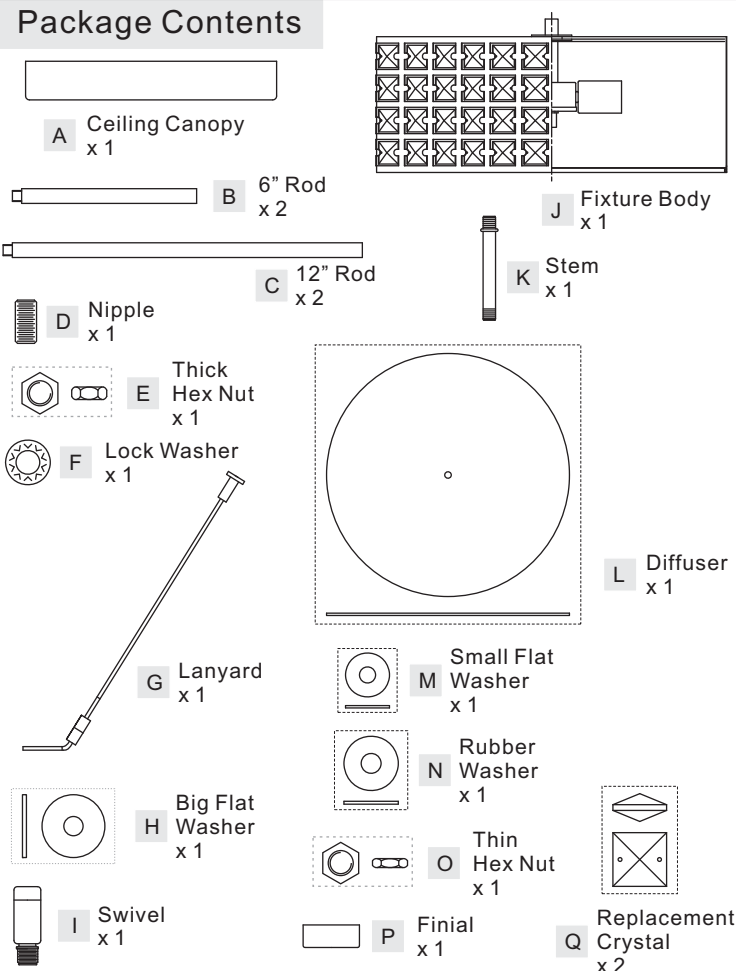

Hardware Contents

Crossbar Assembly x 1 AA




Assembly Instructions for Pendant Light (Step 1A - Step 8A)

STEP 1A – Attach Lanyard, Swivel and Ceiling Canopy together

- Thread Nipple (D) onto the Swivel (I).
- Place Ceiling Canopy (A), Big Flat Washer (H), Lanyard (G) and Lock Washer (F) over the Nipple (D). Secure by threading Thick Hex Nut (E) onto the Nipple (D), tighten until snug with pliers.

Figure 1A

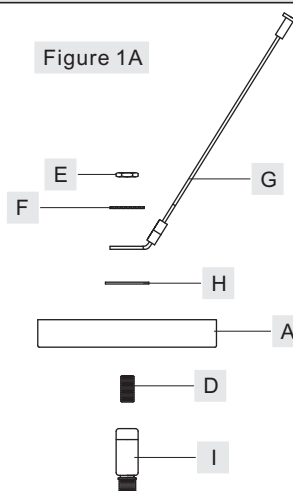


STEP 2A – Assemble Rods and the Ceiling Canopy

- Determine Rods (B/C) to be assembled to Fixture Body (J) according to your hanging height.
- Pass supply wires and ground wire through the chosen rods (B/C) and Ceiling Canopy (A). Thread Fixture Body (J), the chosen Rods (B/C) and the Swivel (I) together. Hand tighten until snug.

Suggested rods for Ceiling height :
8' ceiling : (2) 12" rods
9' ceiling : use (2) 6" rods and (2) 12" rods

Figure 2A

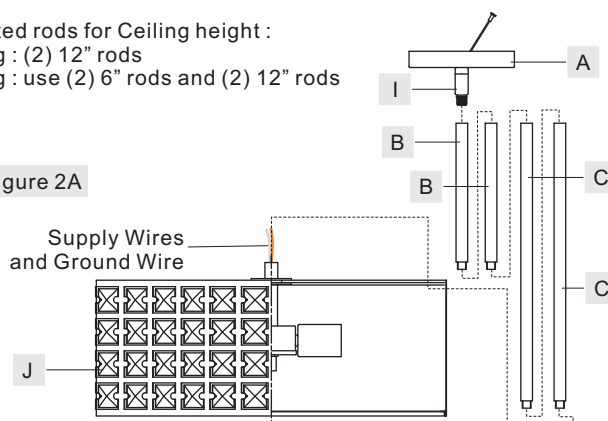

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www. quoizel. com

STEP 3A – Install Crossbar Assembly

- A. Pass the supply wires through the Crossbar Assembly (AA). Attach the Crossbar Assembly (AA) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.




Figure 3A

STEP 4A – Test Fitting Ceiling Canopy to Crossbar Assembly

- A. Remove mounting balls from Crossbar Assembly (AA). Fit Ceiling Canopy (A) to Crossbar Assembly (AA) and secure with mounting balls. Note: The Ceiling Canopy (A) should be snug against the ceiling and the mounting balls. If Not, adjust the length of mounting screws on the Crossbar Assembly (AA) by unscrewing the preassembled hex nut and lock washer and then screwing mounting screws in or out of the crossbar until the correct length is achieved. Once the Ceiling Canopy (A) is secure, remove mounting balls and Ceiling Canopy (A) and proceed to Step 5A.

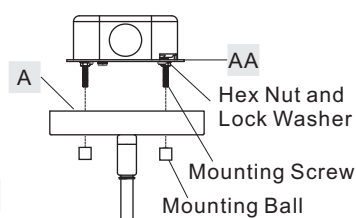


Figure 4A

STEP 5A – Attach Lanyard

- A. The purpose of the lanyard is to provide the installer a means to support the fixture from the junction box while connecting the electrical wires. This enables the fixture to hang from the junction box and your hands are free to make the wire connections.
- B. Turn the Button Stop so it may be inserted into the Crossbar slot. Make sure the Button Stop is completely inside the Crossbar. Slowly release the fixture to make sure it is supported by the Button Stop. Proceed to the wiring steps in the next step. Once you are complete with the wiring there is nothing to do with Lanyard. The Lanyard will push into the junction box when the fixture is placed for final mounting.




Figure 5A

STEP 6A - Wire Connections

- A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

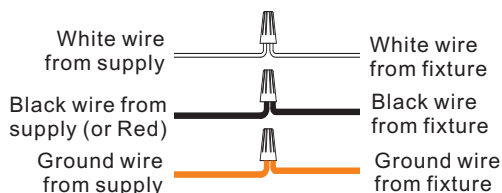


Figure 6A

STEP 7A – Install Fixture Body

- A. Carefully tuck all wires into the outlet box and position Ceiling Canopy (A) over the outlet box. Align the holes in Ceiling Canopy (A) with mounting screws, then attach Ceiling Canopy (A) using the previously removed mounting balls. Hand tighten until snug.




Figure 7A

STEP 8A – Install Diffuser and Bulbs

- A. Thread the beaded end of the Stem (K) onto the coupling on the bottom center of junction box. Hand tighten until snug.
- B. Place the Diffuser (L) over the end of the Stem (K). Attach the Diffuser (L) to tabs on the bottom edge of the cage. Pass the Rubber Washer (N) and the Small Flat Washer (M) over the end of the Stem (K) and secure with the Thin Hex Nut (O). Tighten gently until snug.
- C. Thread the Finial (P) onto the end of the Stem (K) and hand tighten until snug.
- D. Insert bulb onto socket and screw snugly into place.

Your fixture is now assembled and ready to use. Enjoy!


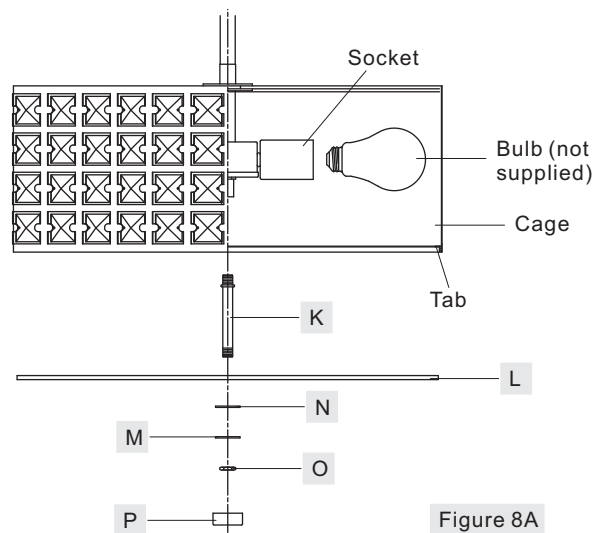


Figure 8A

Assembly Instructions for Semi-flush Light (Step 1B - Step 7B)

Part B, Part C and Part I will not be used in the assembly of the Semi-Flush Light fixture. Please set aside these parts.

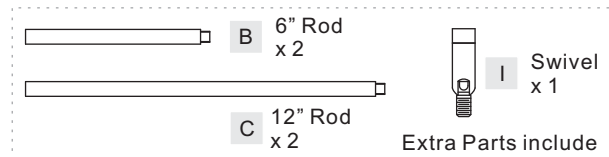

Extra Parts include

STEP 1B – Install Lanyard, Ceiling Canopy and Fixture Body together


- A. Pass supply wires with ground wire through Nipple (D), Ceiling Canopy (A), Big Flat Washer (H), Lanyard (G), Lock Washer (F) and Thick Hex Nut (E). Thread Nipple (D) onto the Fixture Body (J).

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www.quoise.com

(Step 1B continued)


Place the Ceiling Canopy (A), Big Flat Washer (G), Lanyard (G) and Lock Washer (F) onto Nipple (D). Secure by threading the Thick Hex Nut (E) onto the Nipple (D). Hand tighten until snug. Cut the wires leaving approximately 6" of wire extending from the Ceiling Canopy.

B. Optional Swivel: Install the swivel to the Fixture Body (J) and then attach the Nipple (D) and the Ceiling Canopy (A) to the Swivel using the Flat Washer (H), Lanyard (G), Lock Washer (F) and Thick Hex Nut (E) as in step A.

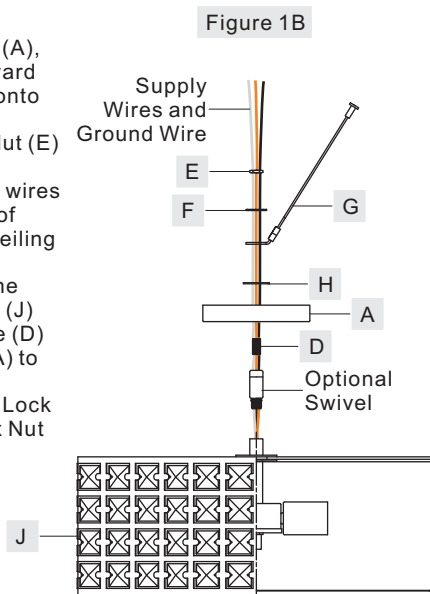


STEP 2B – Install Crossbar Assembly

A. Pass the supply wires through the Crossbar Assembly (AA). Attach the Crossbar Assembly (AA) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.

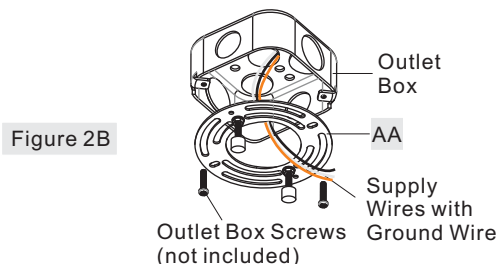

STEP 3B – Test Fitting Ceiling Canopy to Crossbar Assembly


A. Remove mounting balls from Crossbar Assembly (AA). Fit Ceiling Canopy (A) to Crossbar Assembly (AA) and secure with mounting balls. Note: The Ceiling Canopy (A) should be snug against the ceiling and the mounting balls. If Not, adjust the length of mounting screws on the Crossbar Assembly (AA) by unscrewing the preassembled hex nut and lock washer and then screwing mounting screws in or out of the crossbar until the correct length is achieved. Once the Ceiling Canopy (A) is secure, remove mounting balls and Ceiling Canopy (A) and proceed to Step 4B.

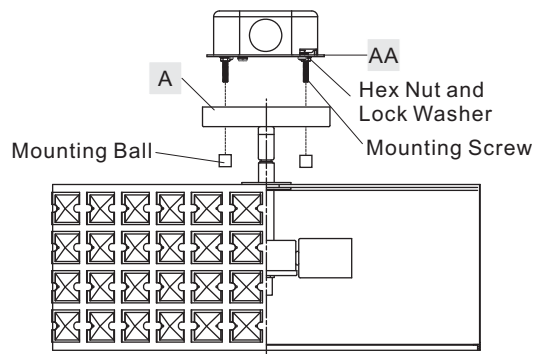

STEP 4B – Attach Lanyard


A. The purpose of the lanyard is to provide the installer a means to support the fixture from the junction box while connecting the electrical wires. This enables the fixture to hang from the junction box and your hands are free to make the wire connections.

B. Turn the Button Stop so it may be inserted into the Crossbar slot. Make sure the Button Stop is completely inside the Crossbar. Slowly release the fixture to make sure it is supported by the Button Stop. Proceed to the wiring steps in the next step. Once you are complete with the wiring there is nothing to do with Lanyard. The Lanyard will push into the junction box when the fixture is placed for final mounting.

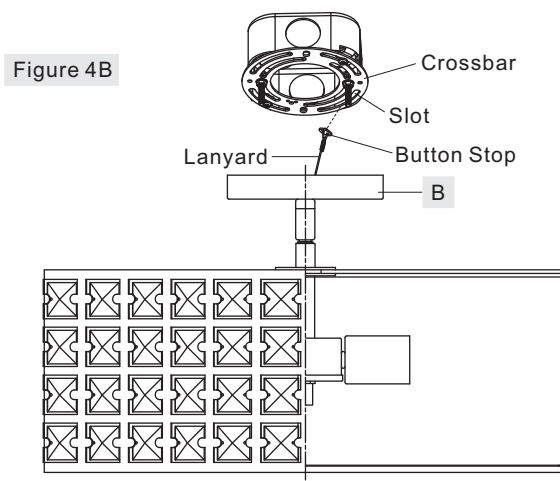


STEP 5B - Wire Connections

A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

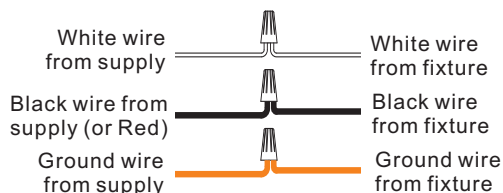

STEP 6B – Install Fixture Body

A. Carefully tuck all wires into the outlet box and position Ceiling Canopy (A) over the outlet box. Align the holes in Ceiling Canopy (A) with mounting screws, then attach Ceiling Canopy (A) using the previously removed mounting balls. Hand tighten until snug.

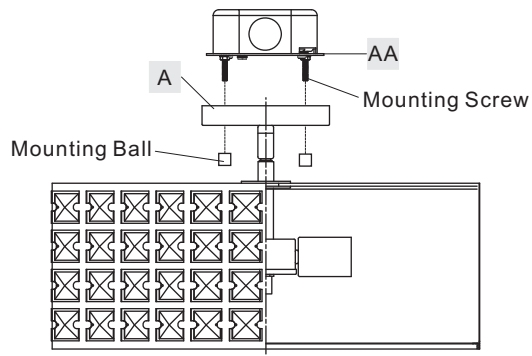

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www.quoise.com

STEP 7B – Install Diffuser and Bulbs

- Thread the beaded end of the Stem (K) onto the coupling on the bottom center of junction box. Hand tighten until snug.
- Place the Diffuser (L) over the end of the Stem (K). Attach the Diffuser (L) to tabs on the bottom edge of the cage. Pass the Rubber Washer (N) and the Small Flat Washer (M) over the end of the Stem (K) and secure with the Thin Hex Nut (O). Tighten gently until snug.
- Thread the Finial (P) onto the end of the Stem (K) and hand tighten until snug.
- Insert bulb onto socket and screw snugly into place.

Your fixture is now assembled and ready to use. Enjoy!

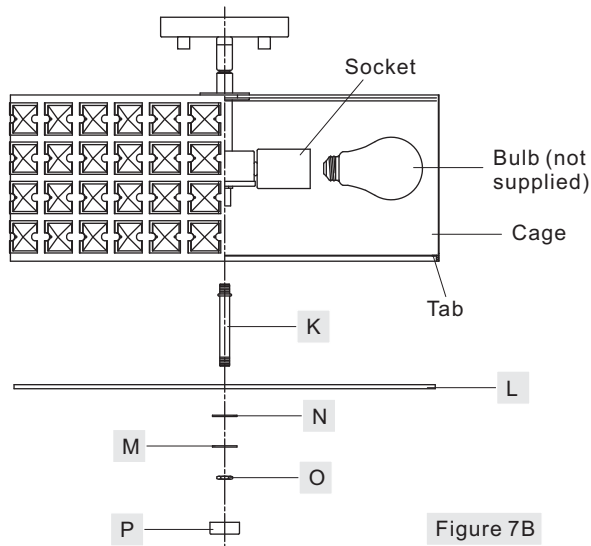


Figure 7B


LXY2817IB

LXY2817VG

FINISH: IMPERIAL BRONZE

FINISH: VINTAGE GOLD

SEMI-FLUSH

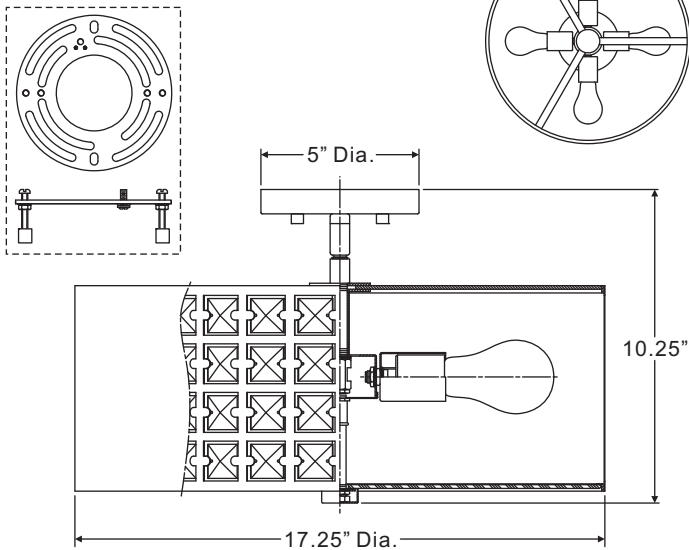

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"


LXY2817IB

LXY2817VG

FINISH: IMPERIAL BRONZE

FINISH: VINTAGE GOLD

PENDANT LIGHT

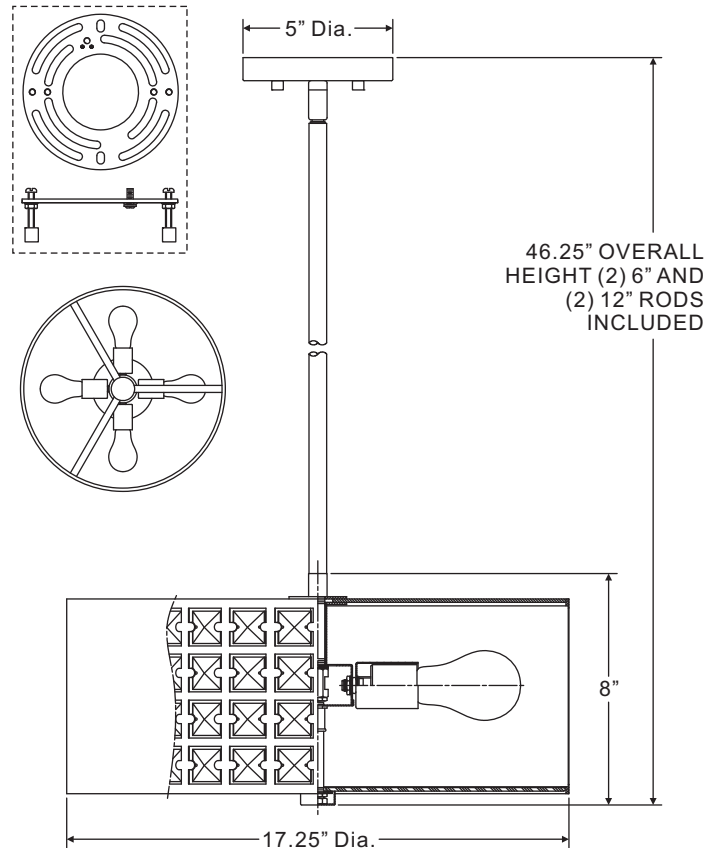

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184 or visit us on-line at www.quoizel.com