

Please go to [www. quozel. com](http://www. quozel. com) for product cleaning tips. Go to the **Care + Maintenance** selection.

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Light Source:** (2) Medium Base 100W bulbs Maximum.

**Estimated Assembly Time:** 30-45 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


**⚠ Warnings and Cautions**

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.


Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

**Package Contents**

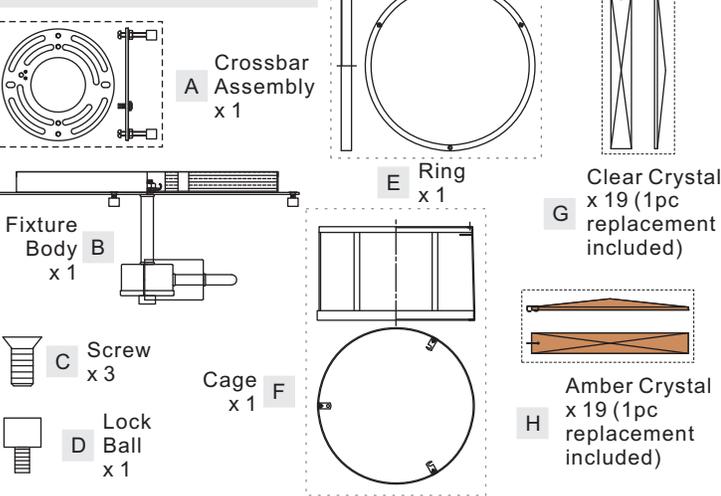


**STEP 3 - Attach Crystals**

- A. Place the bottom end of Clear Crystals (G) and Amber Crystals (H) into bottom edge of the Cage. Attach hangers at Clear Crystals (G) and Amber Crystals (H) to holes on the top edge of Cage one next to another.
- B. After finish all crystals, place Ring (E) onto top edge of the Cage (F) and secure with Screws (C). Tighten until snug.

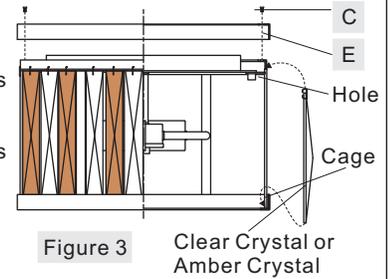


**STEP 4 - Attach Fixture Body and Cage together**

- A. Adjust the Screw with Ball until there is enough space between the lock ball and the ceiling canopy.
- B. Fit the Slot on the tabs at the top edge of the Cage to screws between the lock balls and ceiling canopy. Align the hole on the rest Tab at the top edge of the cage to mounting holes on the ceiling canopy.
- C. Pass the lock ball (D) through the hole on the tab at the top edge of the Cage (F) and thread it into the mounting hole on the ceiling canopy. Hand tighten until snug to secure the Cage (F).
- D. Tighten the other (2) lock balls and hand tighten until snug.

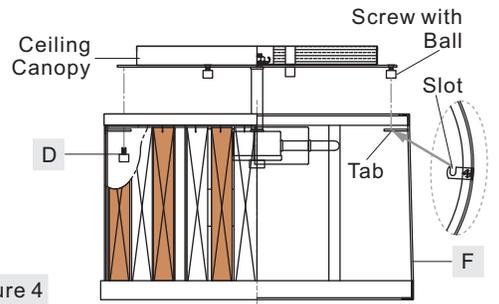


**STEP 1 - Installing the Crossbar Assembly**

- A. Pass the supply wires through the Crossbar Assembly (A). Attach the Crossbar Assembly (A) to the Outlet Box with the head of the Green Ground Screw facing you. Secure the Crossbar Assembly (A) with Outlet Box Screws (not included). Tighten until snug.




**STEP 2 - Test Fit the ceiling canopy to the Crossbar Assembly**

- A. Remove the mounting balls from the Crossbar Assembly (A). Place the ceiling canopy and Fixture Body (B) onto the Crossbar Assembly (A) and secure with mounting balls. Note: The ceiling canopy and Fixture Body (B) should be snug against the wall and held tight with the mounting balls. If it is not, adjust the length of the mounting screw on the Crossbar Assembly (A) by unscrewing the preassembled hex nut and lock washer and then screwing the mounting screws in or out of the crossbar until the correct length is achieved. Once the ceiling canopy and Fixture Body (B) is secure, remove the mounting ball and Fixture Body (B) and proceed to Step 3.

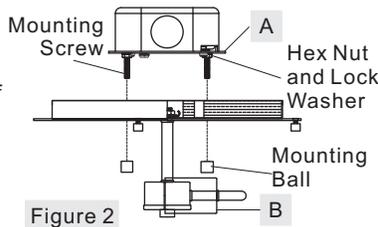

**STEP 5 - Wire Connections**

- A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

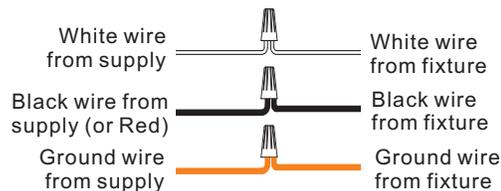

**Thank you for purchasing a Quoizel product.**  
**Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184**  
**or visit us on-line at [www. quozel. com](http://www. quozel. com)**

### STEP 6 - Install Fixture Body

A. Two people are recommended for this step. With one person hold Fixture Body (B) with Crystals. Another person tuck all wires into the outlet box carefully. Position the Fixture Body (B) over the outlet box. Align the holes in the ceiling canopy with the mounting screws, then attach the ceiling canopy using the previously removed mounting balls. Hand tighten until snug.

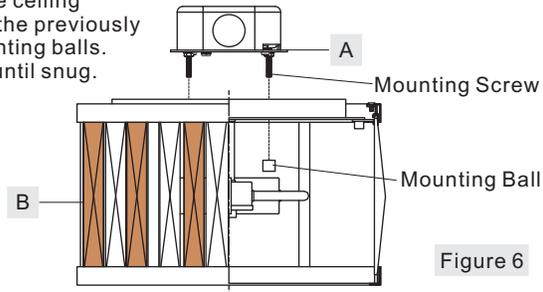


Figure 6

### STEP 7 - Install Bulb

A. This fixture uses standard bulb with medium base. Maximum 100 watts. Insert bulb and screw snugly into place.

Your fixture is now assembled and ready to use. Enjoy!




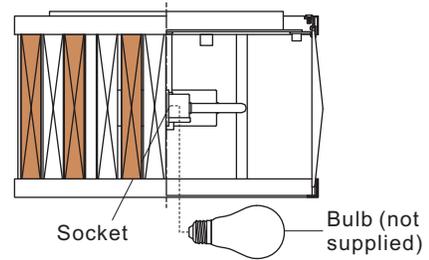


Figure 7

PCBL1614BN

FINISH: BRUSHED NICKEL

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

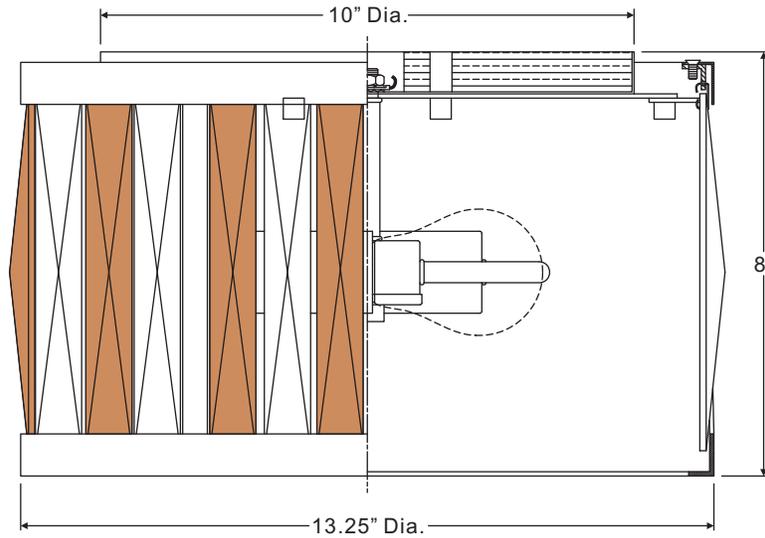

Thank you for purchasing a Quoizel product.  
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)