

Please go to www. quozel. com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: Integrated 31W LED.

Estimated Assembly Time: 20-30 minutes


Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Package Contents

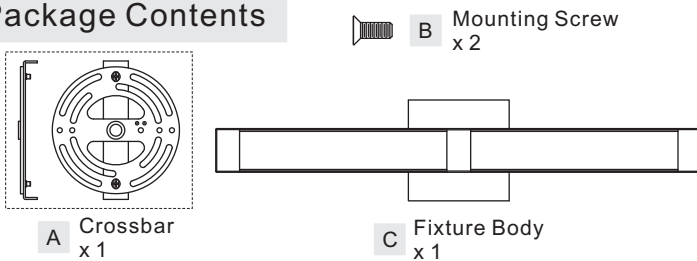

STEP 1 - Installing the Crossbar

A. Pass the supply wires and ground wire through the Crossbar (A). Attach the Crossbar (A) to the Outlet Box and secure with Outlet Box Screws (not included). Tighten until snug.

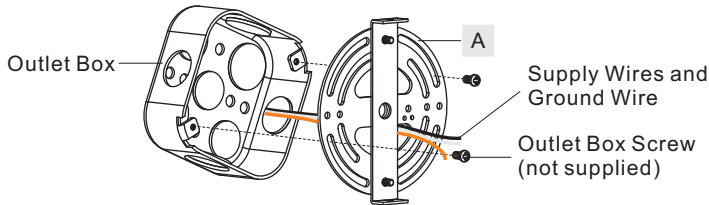


Figure 1

STEP 2 - Wire Connections

A. Use standard wire connectors (not included) to make all the wire connections. Twist the connectors until the wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

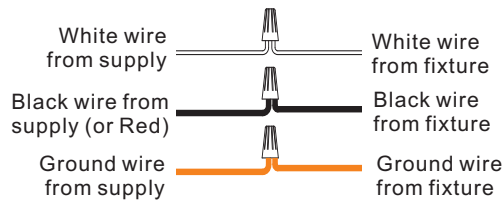


Figure 2

STEP 3 - Install the Fixture Body

A. Position the backplate and Fixture Body (C) onto the Crossbar (A). Align holes on the backplate to the mounting holes on the ends of the Crossbar (A). Secure the Fixture Body by using the mounting Screws (B) and hand tighten until snug with screwdrivers.





Figure 3


Your fixture is now assembled and ready to use. Enjoy!

Replace Shade

A. Turn power OFF and then remove fixture from wall outlet box. Unscrew screws from one end of the fixture body with screwdrivers and remove the end cap.

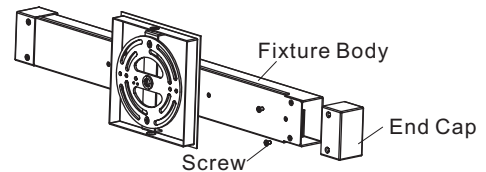

A. Slip the old shade off the fixture body and slip the replacement shade into the fixture body.
 B. Place previously removed end cap back onto the end of the fixture and secure with the removed screw. Tighten until snug with screwdrivers.

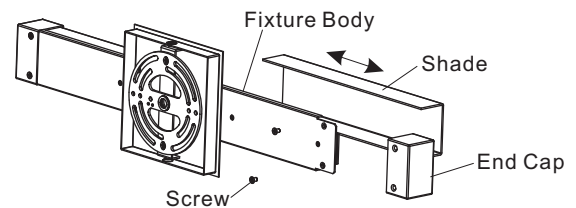



Repeat the same process to replace another shade if necessary. Refer to Step 1 - Step 3 to install the fixture back onto the wall outlet box.

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www. quozel. com

PCEB8524C

FINISH: POLISHED CHROME

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

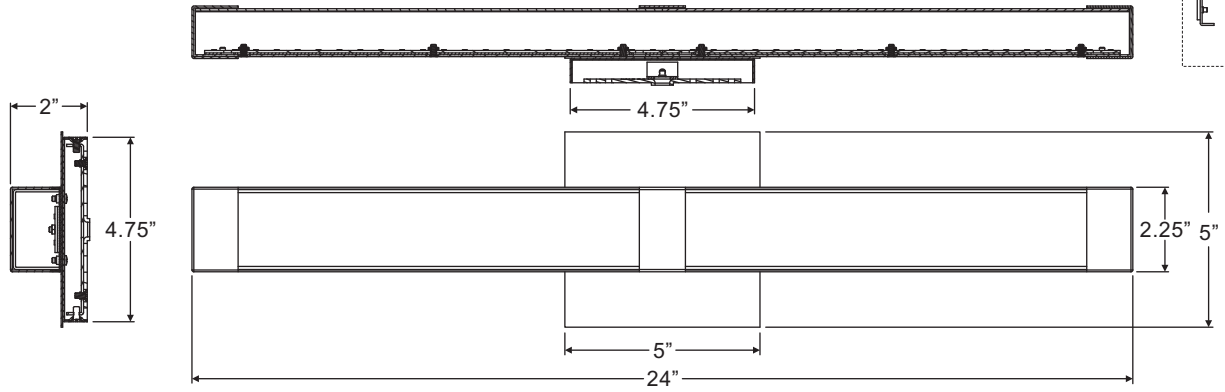

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www.quoizel.com