

Please go to www.quoizel.com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (5) G9 Base Clear Xenon Bulbs 40W Maximum.

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.


These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

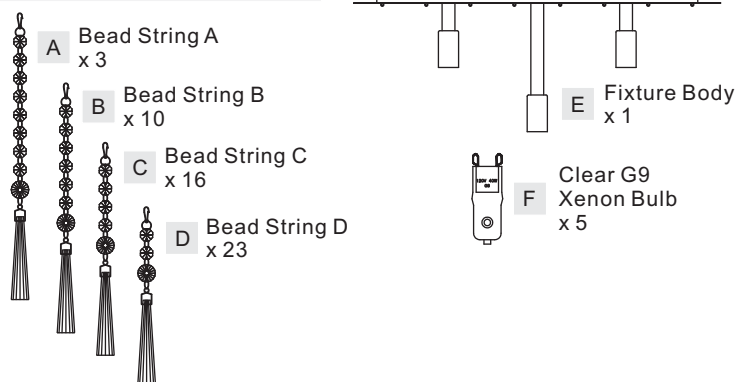


Hardware Contents

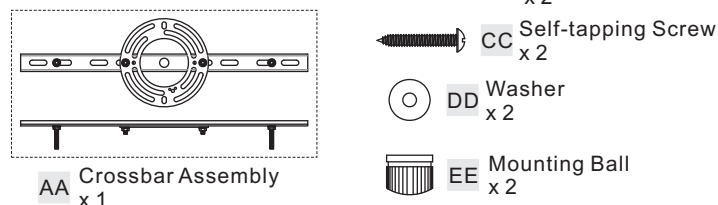


STEP 1 – Attach Crossbar Assembly to Outlet Box

- Attach the Crossbar Assembly (AA) onto the Outlet Box and make two marks on the ceiling from keyholes on the flat strap of the Crossbar Assembly (AA).
- Remove the Crossbar Assembly (AA) and drill proper holes on the ceiling from marks. Insert Wall Anchors (BB) into the holes properly. Attach the Crossbar Assembly (AA) to Outlet Box. Thread Outlet Box Screws (not Supplied) into mounting holes on the Outlet Box. Pass Washers (DD) over Self-tapping Screws (CC) and thread Self-tapping Screws (CC) into Wall Anchors (BB). Hand tighten until snug.

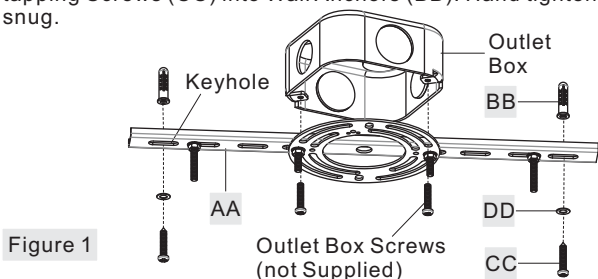


STEP 2 – Test Fitting Fixture Body to Crossbar Assembly

- Fit the Fixture Body (E) over the mounting screws on the Crossbar (AA) and secure with the Mounting Balls (EE). The ceiling canopy of the Fixture Body (E) should be snug against the ceiling and the Mounting Ball (EE). If not, adjust the length of the mounting screws on the Crossbar Assembly (AA) by unscrewing the hex nut and the lock washer and then screwing the mounting screws in or out of the Crossbar Assembly (AA) until the correct length is achieved. Once the ceiling canopy of Fixture Body (E) is secure, remove the Mounting Balls (EE) and Fixture Body (E) and proceed to step 3.

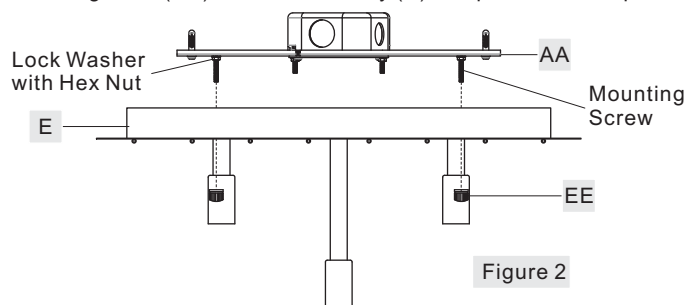


STEP 3 - Wire Connections

- Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

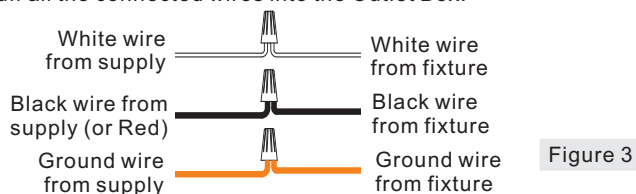

STEP 4 – Install Fixture Body

- Carefully tuck all wires into the outlet box and position the ceiling canopy of the Fixture Body (E) over the outlet box. Attach the ceiling canopy of the Fixture Body (E) over the mounting screws and secure with the Mounting Balls (EE). Hand tighten until snug.

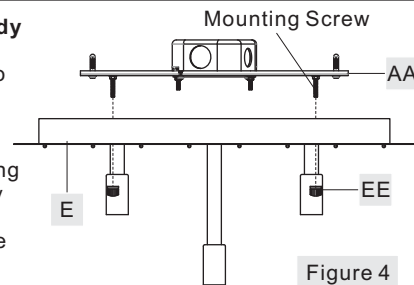

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www.quoizel.com

STEP 5 - Attach Crystal Strings and Install Bulbs


A. (Refer to **Crystal Strings Distribution**) Attach Bead Strings A (A), Bead Strings B (B), Bead Strings C (C) and Bead Strings D (D) to proper locations on the ceiling canopy of Fixture Body (E).

B. Insert bulbs (F) into sockets and push snugly into place.


IMPORTANT: Do not touch the bulb with bare hands use a cloth or glove.

Your fixture is now assembled and ready to use. Enjoy!

Figure 5



**CRYSTAL STRINGS
DISTRIBUTION**

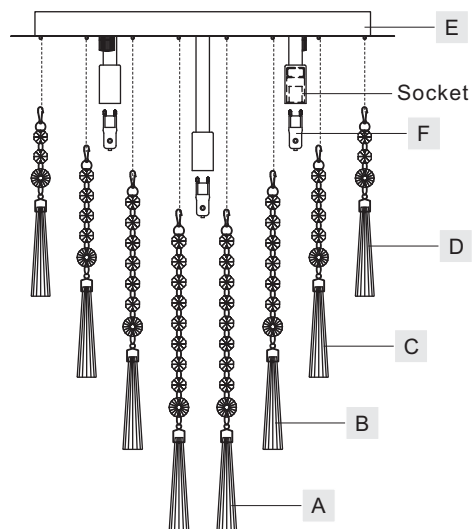

CAUTION FOR BULB REPLACING

A. When replace bulb, turn off power and allow lamp to cool. For safety purpose, wear gloves and eye protection.



B. If bulb is scratched or cracked, DO NOT use the lamp to avoid breakage during use or installation.

C. Use only in fixtures rated for lamps wattage and voltage.

D. Lamp operate under high pressure generating intense heat. Prevent contact with liquid and combustible materials.

PCTE1616C

FINISH: POLISHED CHROME

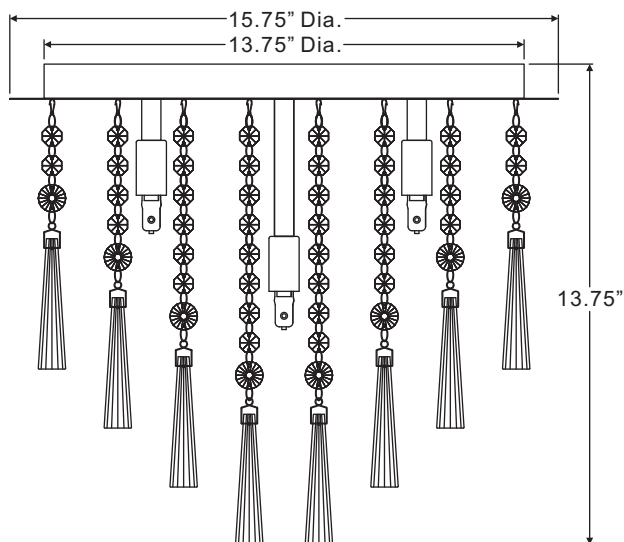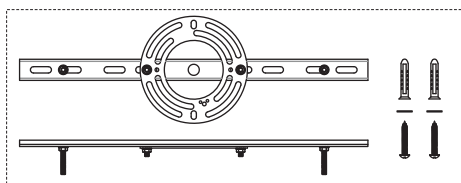

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www.quoizel.com