

ASSEMBLY AND INSTALLATION INSTRUCTIONS

MN-CHU014

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.




**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTION.**

For Semi-Flush:

1. Take out the parts for Semi-Flush from the hardware package.
2. Attach two screws to the mounting strap, then secure them with two lock nuts. Adjust the length of the screws if necessary.
3. Attach the mounting strap to the outlet box by using two mounting screws.
4. Remove the loop from the fixture wires.
5. Cut the redundant wires if necessary. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - Connect the smooth wire (marked) from the fixture to the black wire from the power source.
 - Connect the ridged wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.

Carefully tuck the wires back into the outlet box.
6. Attach canopy(-a) to the mounting strap by inserting the screws, then secure it with the bolt nuts.
7. Attach the candle tubes to the sockets, then install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
8. Install crystal drops as shown in diagram.

Note: To replace broken crystal drops -Open the pins to remove the crystal drops, hook the new crystal drops, and then close back pins. Avoid bending the pins into sharp angle.
9. Turn on the power at the main fuse or circuit breaker box.

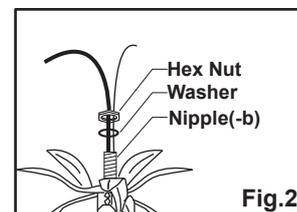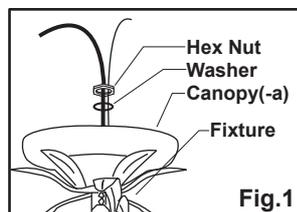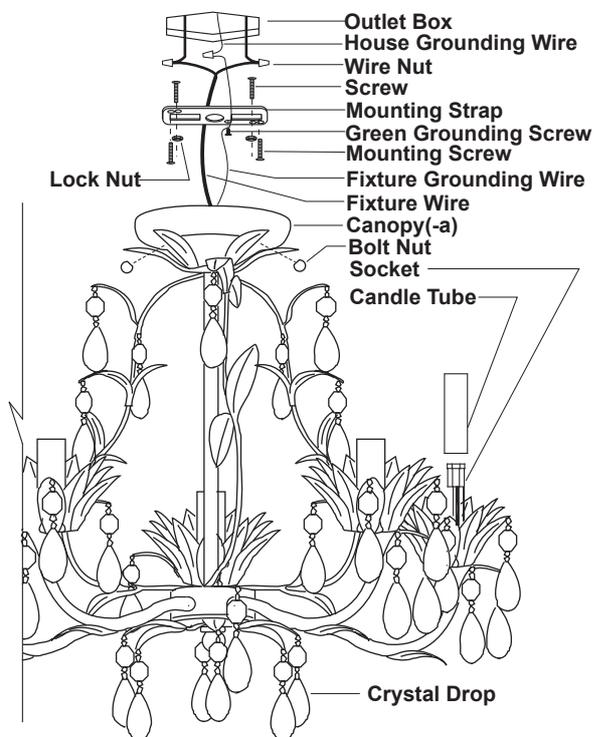

For Chandelier: (See Fig.3)

1. Unscrew the hex nut and washer to remove canopy(-a) from the fixture. Then screw the hex nut and washer back to nipple(-b) tightly. (See Fig.1 & Fig.2)
2. Take out the parts for Chandelier from the hardware package.
3. Attach nipple(-a) to the mounting strap, then secure it with a washer and hex nut.
4. Attach the mounting strap to the outlet box by using two mounting screws.
5. Thread the fixture wire and fixture grounding wire through the loop, then secure the loop onto nipple(-b).
6. Choose the length of the chain you need, and weave the fixture wire and the fixture grounding wire through the chain. Connect one end of the chain with the loop by using the loop lock.
7. Secure the top loop to nipple(-a).
8. Thread the fixture wire and fixture grounding wire through the collar, canopy, top loop, nipple(-a) and mounting strap.
9. Connect the other end of the chain with the top loop by using the loop lock.
10. Follow step 5 for Semi-Flush.
11. Attach canopy(-b) to the mounting strap by inserting the top loop, then secure it with the collar.
12. Follow steps 7~9 for Semi-Flush.

