

# ASSEMBLY AND INSTALLATION INSTRUCTIONS


CR-CFU130

**WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.**

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.**

## For Semi-Flush

1. Remove contents of hardware package marked "For Semi-Flush".
2. Attach two screws to the mounting strap, and secure it with two lock nuts. Adjust the length of the screws if necessary.
3. Attach the mounting strap to the outlet box by using two mounting screws.
4. Screw the long nipple into the coupling on the top of the fixture, and secure it with a washer and hex nut. Then slip the pipe assembly and fixture canopy down through the long nipple, and secure them with a washer and hex nut.
5. Cut the redundant wires if necessary. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
  - Connect the smooth wire (marked) from fixture to the black wire from power source.
  - Connect the ridged wire(unmarked) from fixture to the white wire from power source.
  - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with the wire nut.
 Carefully put wires back into the outlet box.
6. Unscrew two bolt nuts from the fixture canopy. Attach the fixture canopy to the mounting strap, and secure it with the bolt nuts.
7. Screw the middle nipple to the coupling of the socket base, secure it with a washer and hex nut. Then slip the tube, small cap with the open side facing upward and big cap with the open side facing downward through the middle nipple, secure them with a hex nut.
8. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
9. Attach the glass shade and metal ring up to the pan, secure them with a metal pad and hex nut (Do not over tighten). Then slide the cover up to the glass panel, and secure it with the finial.
10. Turn on the power at the main fuse or circuit breaker box.

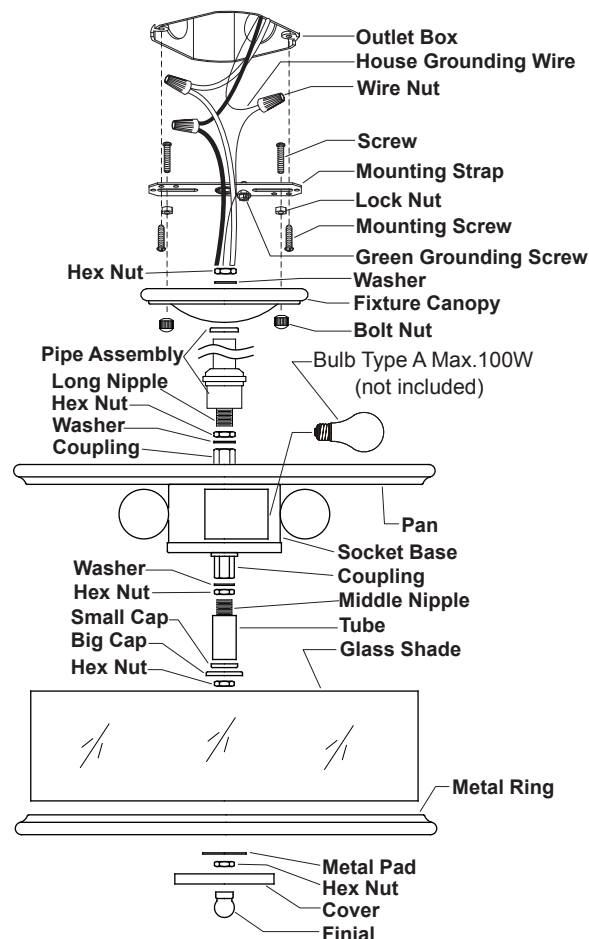

## For Pendant: (See Fig.1)

1. Remove contents of hardware package marked "For Pendant".
2. Attach the short nipple to the mounting strap, and secure it with a washer and hex nut.
3. Attach the mounting strap to the outlet box by using two mounting screws.
4. Secure the top loop to the short nipple.
5. Follow step 4 of instructions For Semi-Flush.
6. Secure the loop onto fixture canopy.
7. Choose the length of the chain you need, then weave the fixture wire and the fixture grounding wire through the chain, collar and canopy.
8. Connect one end of the chain with the loop by using a loop lock.
9. Connect the other end of the chain with the top loop by using another loop lock.
10. Thread the fixture wire and fixture grounding wire through the top loop, short nipple and mounting strap.
11. Follow step 5 of instructions For Semi-Flush.
12. Attach the canopy to the mounting strap by inserting the top loop, and secure it with the collar.
13. Follow steps 7~10 of instructions For Semi-Flush.

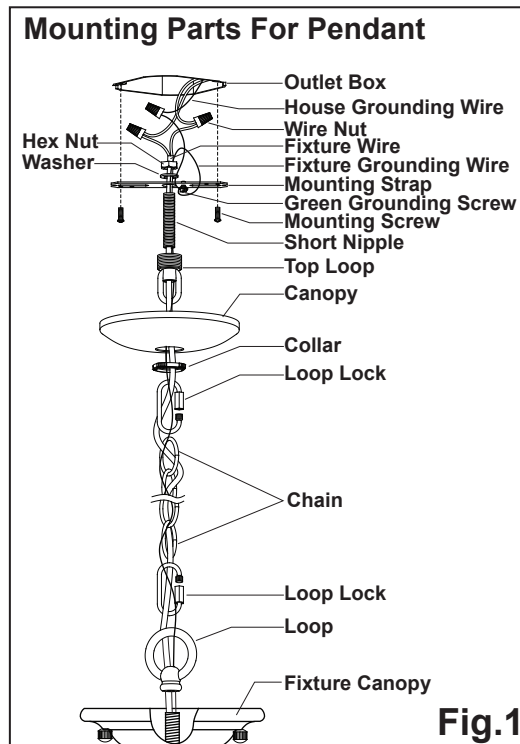


Fig.1