



# ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0012 / C0018

**WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.**

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.**

## Contents of Spare Parts:

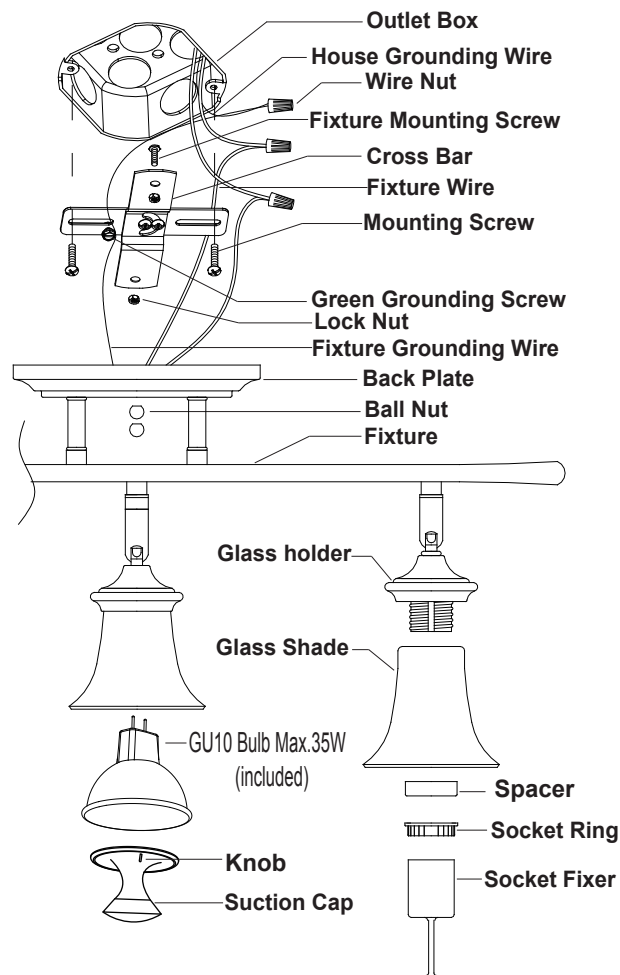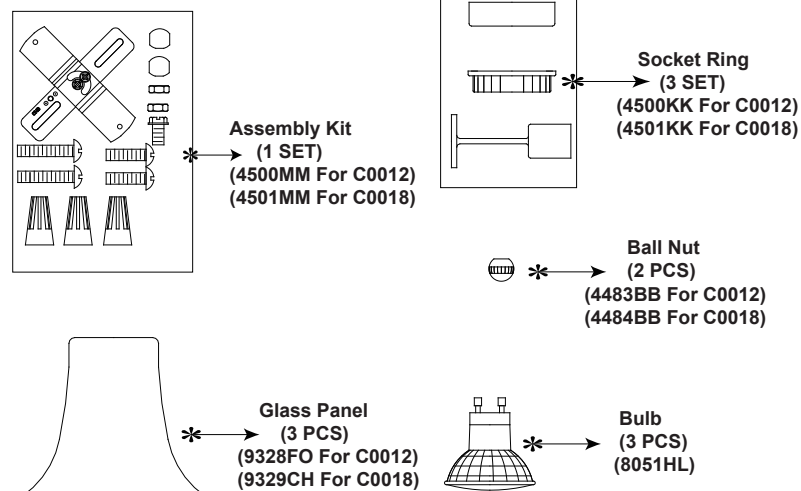

1. Thread two fixture mounting screws to the cross bar, and secure them with two lock nuts. Adjust the length of the fixture mounting screws if necessary.
2. Attach the cross bar to the outlet box by using two mounting screws.
3. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
  - Connect the black wire from the fixture to the black wire from the power source.
  - Connect the white wire from the fixture to the white wire from the power source.
  - Attach the fixture grounding wire to the cross bar with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
 Carefully put the wires back into the outlet box.
4. Attach the back plate to the cross bar by inserting the headless screws, then secure it with ball nuts.
5. Attach the glass shades onto the glass holders, secure them with the spacer and socket rings. using supplied socket fixer.
6. Install bulbs (Included).
  - a. Attach the suction cap to the top surface of the halogen bulb lens.
  - b. Insert the bulb (GU10 TYPE BULB ONLY) into the socket using the suction cap.
  - c. Remove the suction cap from the halogen bulb lens by pulling the knob of the suction cap.

**Note: Do not discard the suction cap, it will be needed when replacing the bulb.**
7. Adjust the glass to a desired position by using the swivels.
8. Turn on the power at the main fuse or circuit breaker box.