


ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0049

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.**

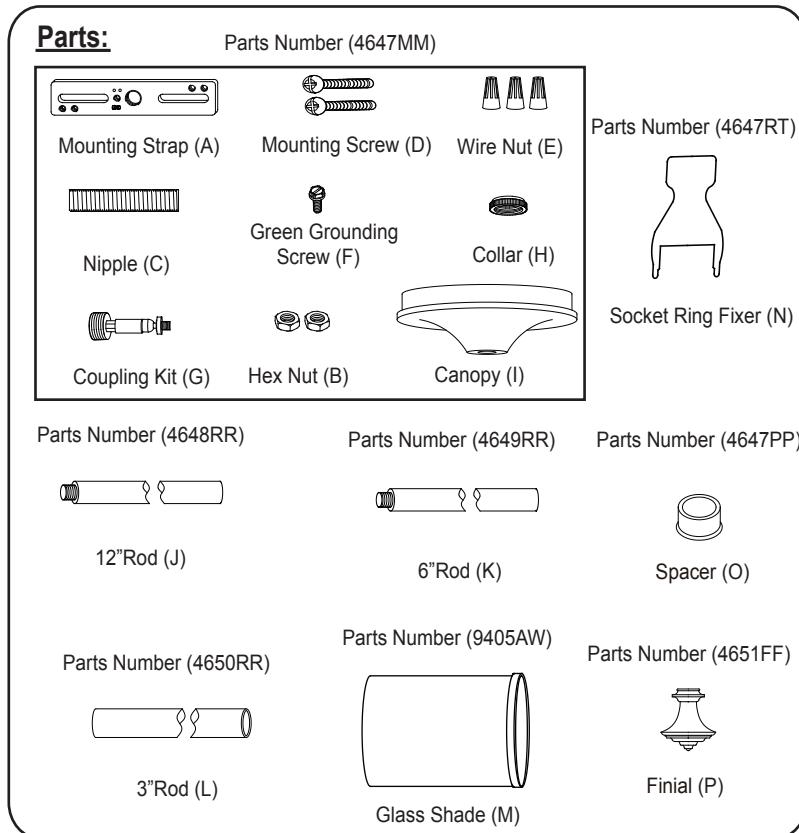

1. Adjust the arms of the fixture according to the drawing of the package.

Important:

a. The arms should be positioned with equal distances between them.

b. The arms should be fixed securely.

2. Secure the loop to the stem of the fixture.

3. Rod Connections:


a. Thread the fixture wire from the fixture through the lower rod, then secure the lower rod onto the coupling of the fixture.

b. Thread the fixture wire through the threaded pipe and middle rod, then secure the middle rod onto the lower rod using the threaded pipe.

c. Thread the fixture wire through the threaded pipe and upper rod, then secure the upper rod onto the middle rod using the threaded pipe.

The height can be adjustable to 22-3/4"~79-3/4", by using the rods.

4. Thread the fixture wire through the coupling kit, collar, canopy, then secure the rod assembly to the coupling kit.

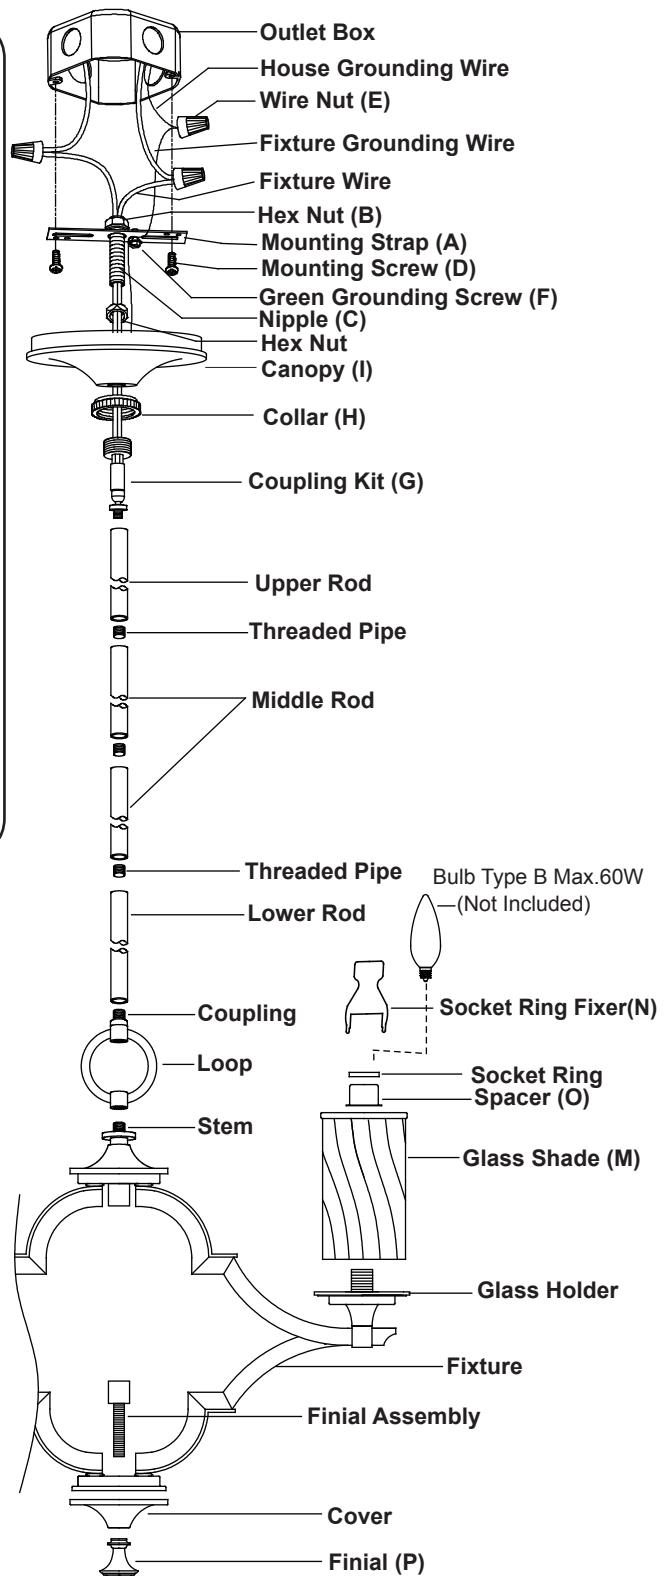

5. Thread the fixture wire through the nipple, hex nut and mounting strap. Install the hex nut onto one end of the nipple leaving about 3/8" (10mm) thread exposed. Install same end of nipple by screwing into coupling kit, secure nipple by tightening hex nut.
6. Attach the nipple to the mounting strap, then secure it with hex nut.
7. Attach the mounting strap to outlet box by using two mounting screws.
8. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - The black (hot) from the fixture to the black wire from the power source.
 - The white (neutral) wire from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
- Carefully tuck the wires back into the outlet box.
9. Attach the canopy to the mounting strap, and secure it with collar.
10. Attach the glass shade to the glass holder, then secure it with the spacer and socket ring, using supplied socket ring fixer.
11. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
12. Attach the cover to the fixture, thread the finial assembly through the fixture, making sure the finial assembly feeds through its center hole, secure them with finial.
13. Turn on the power at the main fuse or circuit breaker box.
- 14. Angled mounting recommended for a vaulted or angled ceiling. (See Fig. 1)**

