


ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0032

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.**

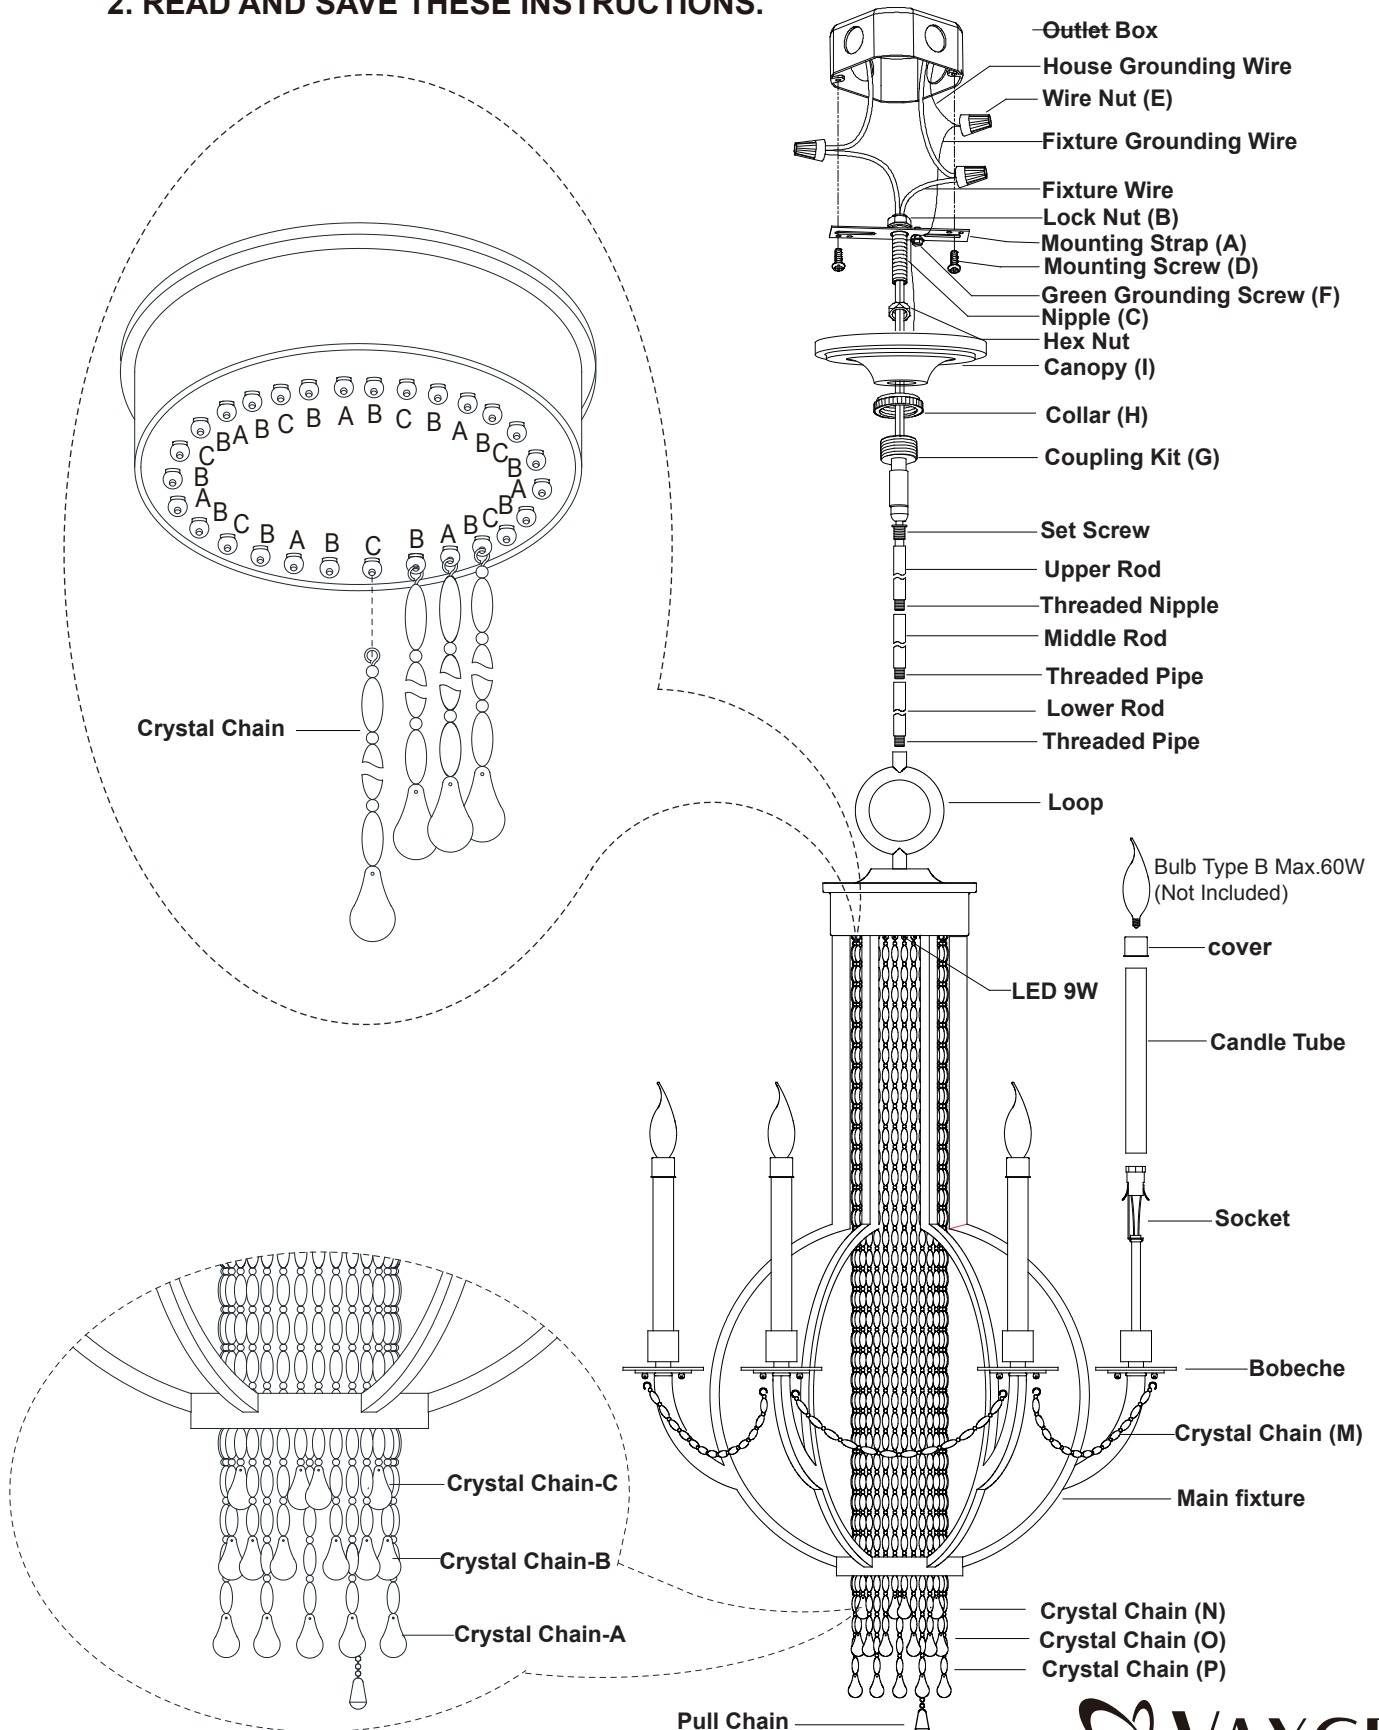

Parts:

Parts Number (4607MM)



Mounting Strap (A)



Lock Nut (B)



Nipple (C)




Mounting Screw (D)



Wire Nut (E)



Green Grounding Screw (F)



Coupling Kit (G)



Collar (H)



Canopy (I)

Parts Number (4607RR)



12"Rod (X4)(J)

Parts Number (4608RR)




6"Rod (X1)(K)

Parts Number (4609RR)




3"Rod (X1)(L)

Parts Number (5029GS)




Crystal chain (X6)(M)

Parts Number (5026GS)




Crystal chain (X7)(N)

Parts Number (5027GS)



Crystal chain (X14)(O)

Parts Number (5028GS)



Crystal chain (X7)(P)



1. Rod Connections:

- Thread the fixture wire from the fixture through the lower rod, secure the lower rod onto loop of the main fixture using the threaded pipe.
- Thread the fixture wire through the middle rod, and then secure the middle rod onto the lower rod using the threaded pipe.
- Thread the fixture wire through the upper rod, and then secure the upper rod onto the middle rod using the threaded pipe.

The height can be adjusted to 45-3/4"~102-3/4", by using the rods.

- Thread the fixture wire through the coupling kit, collar, canopy, then secure the rod assembly to the coupling kit.
- Thread the fixture wire through the nipple, hex nut and mounting strap. Install the hex nut onto one end of the nipple leaving about 3/8" (10mm) thread exposed. Install same end of nipple by screwing into coupling kit, secure nipple by tightening hex nut.
- Attach the nipple to the mounting strap, then secure it with hex nut.
- Attach the mounting strap to outlet box by using two mounting screws.
- Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - The smooth wire (marked) from the fixture to the black wire from the power source.
 - The ridged wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.Carefully put the wires back into the outlet box.
- Attach the canopy to the mounting strap, and secure it with collar.
- Remove crystal chain from packaging. Attach the crystal chain to the main fixture, as shown.
- Attach the candle tubes and covers into the sockets on the main fixture.
- Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
- Turn on the power at the main fuse or circuit breaker box.

12. Choose a mode by pulling down the pull chain.
- Pull down the pull chain, the center LED light will brighten and the side lights will turn off.
 - Pull down the pull chain again, the center LED light will turn off and the side lights will brighten.
 - Pull down the pull chain again, all lights will brighten.
 - Pull down the pull chain again, all lights will turn off.
13. ***Angled mounting recommended for a vaulted or angled ceiling. (See Fig. 1)***

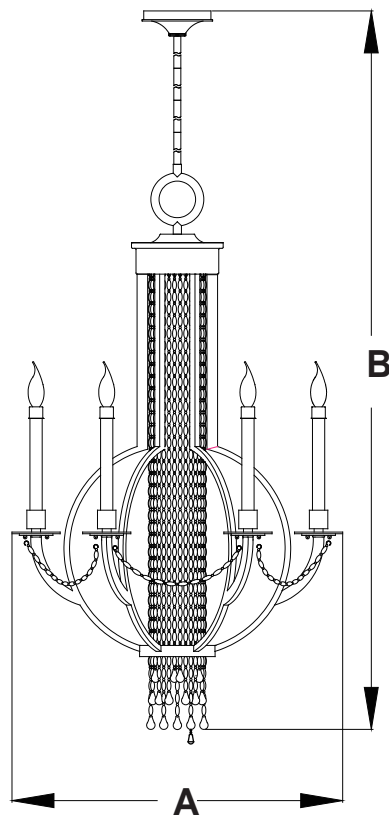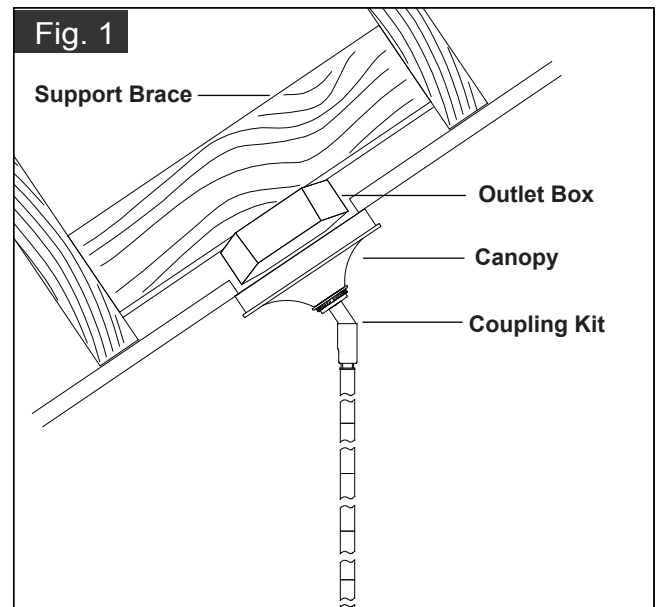

A: 23-1/4"

B: 45-3/4" ~ 102-3/4"