

ASSEMBLY AND INSTALLATION INSTRUCTIONS


H0086 / H0092

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.



**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.**

Parts:

Parts Number (4959MM For H0086)
Parts Number (4968MM For H0092)

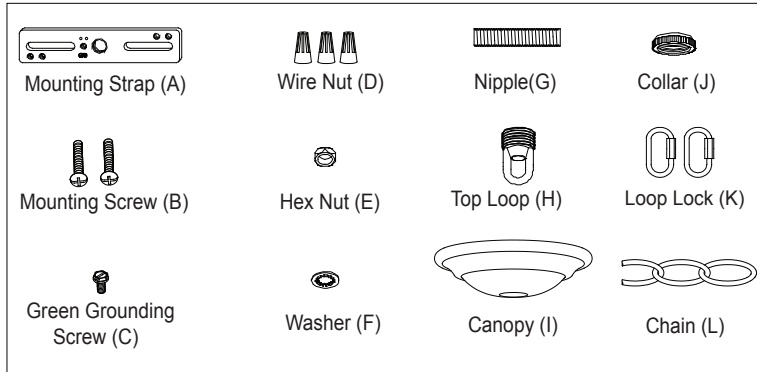

Parts Number (9550EW)

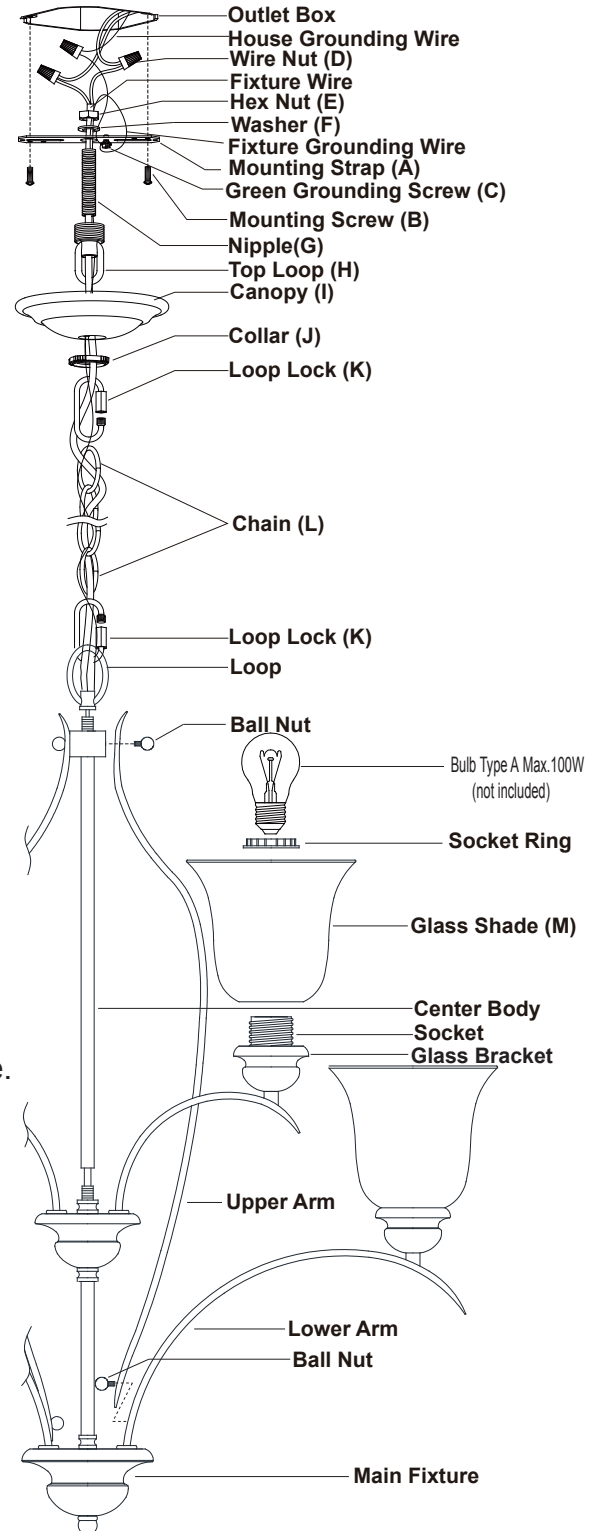

1. Attach nipple to the mounting strap, then secure it with a washer and hex nut.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Secure the top loop to nipple.
4. Secure the center body onto the stem of the main fixture.
5. Secure the loop to the stem of the center body.
6. Take one upper arm and place one end to a lower arm, secure it by fastening the ball nut. See illustration for correct position. Repeat with the other upper arms.
7. Adjust the arms of the fixture according to the drawing of the package.


Important:

a. The arms of each tier (bottom, middle) should be positioned with equal distances between them.

b. The arms should be fixed securely.

8. Place the other end of upper arm to the center body, secure it by fastening the ball nut. See illustration for correct position. Repeat with the other upper arms.
9. Choose the length of the chain you need, then weave the fixture wire and the fixture grounding wire through the chain. Then connect one end of the chain with the loop by using the loop lock.

10. Thread the fixture wire and fixture grounding wire through the collar, canopy, top loop, nipple and mounting strap.
11. Connect the other end of the chain with the top loop by using the loop lock.
12. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections by using the wire nuts:
 - The smooth wire (marked) from the fixture to the black wire from the power source.
 - The ridged wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.Carefully put the wires back into the outlet box.
13. Attach the canopy to the mounting strap by inserting the top loop, then secure it with the collar.
14. Attach the glass shades onto the glass brackets, secure them with socket rings.
15. Install bulbs(not included). See relamping label at socket area or packaging for maximum allowed wattage.
16. Turn on the power at the main fuse or circuit breaker box.

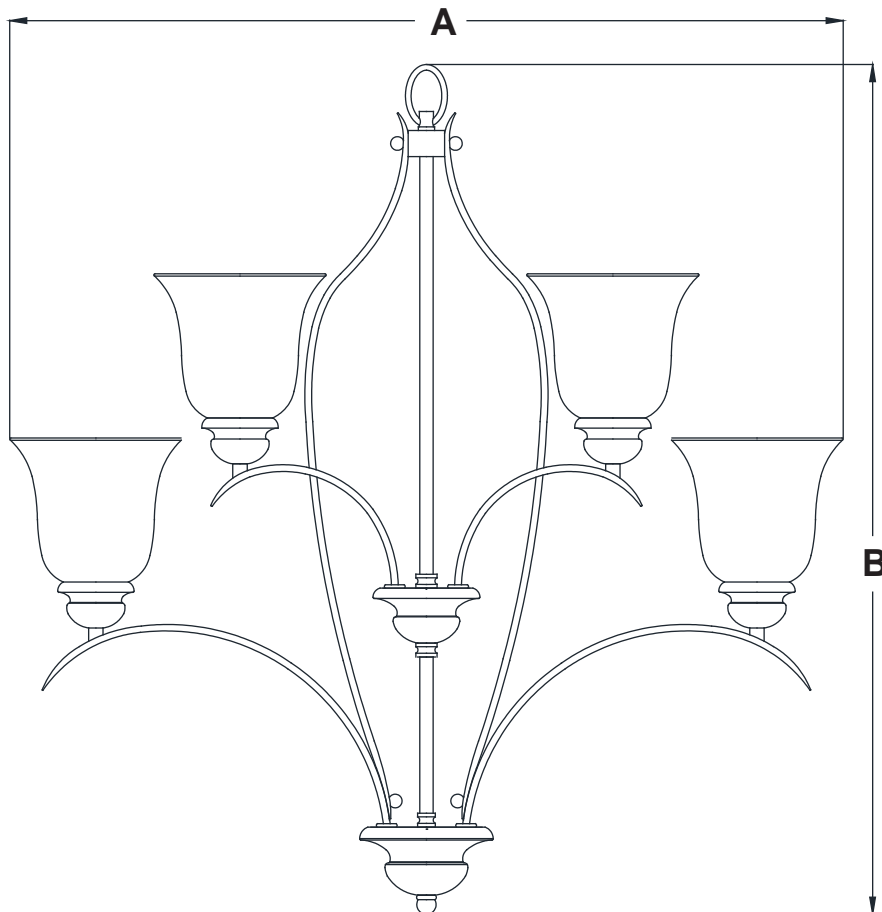

A: 29-1/4"

B: 30-3/4"