

# ASSEMBLY AND INSTALLATION INSTRUCTIONS


P0080

**WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.**



**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.**

## Parts:

Parts Number (5017MM)

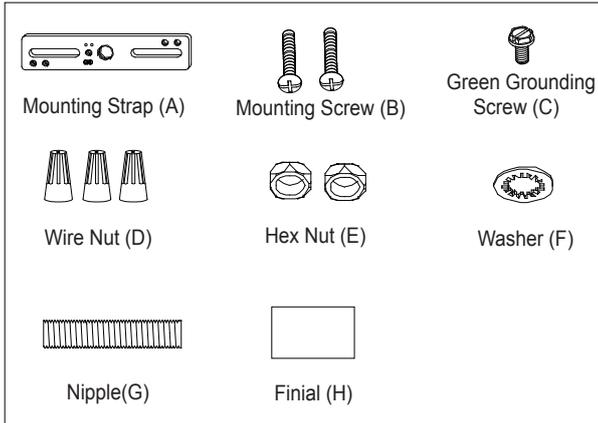

Parts Number (9540EW)

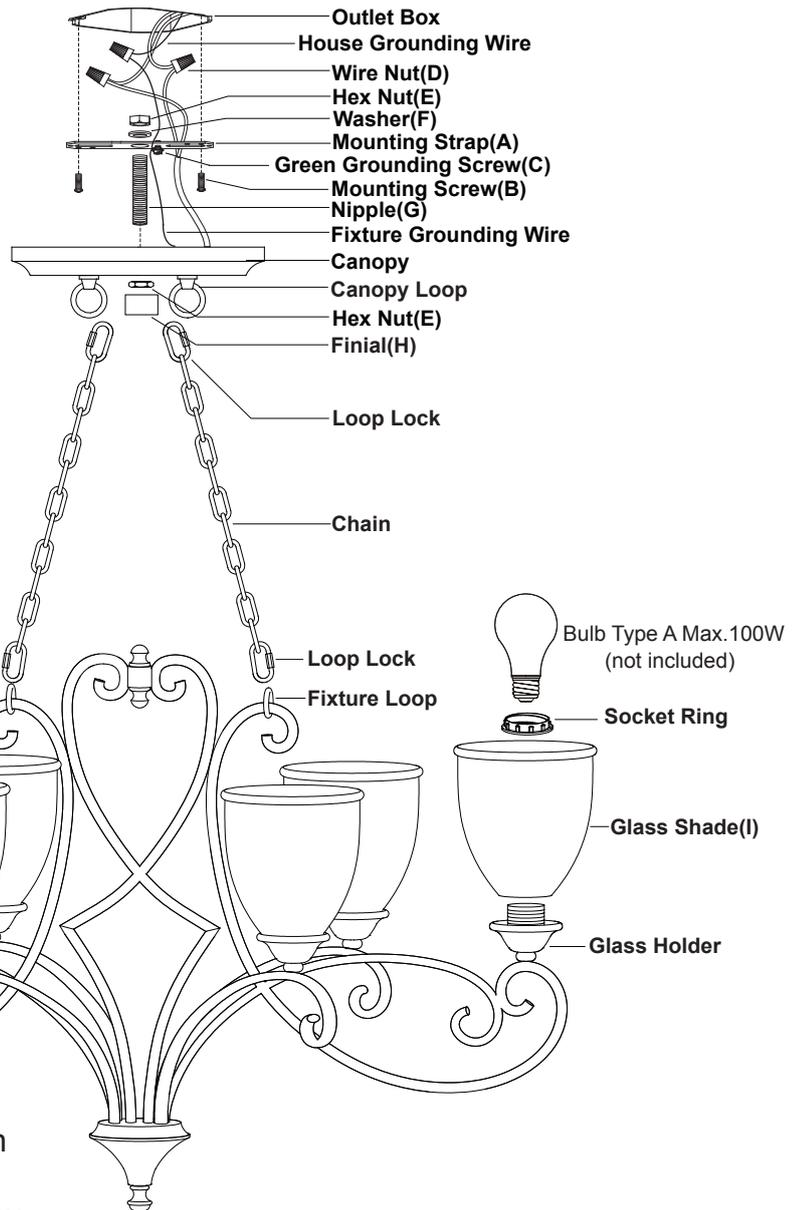

1. Attach the nipple to the mounting strap, then secure it with a washer and hex nut.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Adjust the arms of the fixture according to the drawing of the package.

### Important:


- a. The arms should be positioned with equal distances between them.
- b. The arms should be fixed securely.

4. Choose the length of the chains you need and adapt both chains to this length. Connect one end of the chains to the fixture loops by using the loop locks. Then weave the fixture wire and the fixture grounding wire through one of the chains. Then connect the other end of the chains with the canopy loops by using the loop locks.

 VAXCEL

131223

5. Thread the fixture wires and fixture grounding wire through canopy loop and canopy.
6. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
  - The smooth wires (marked) from the fixture to the black wire from the power source.
  - The ridged wires (unmarked) from the fixture to the white wire from the power source.
  - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.Carefully put the wires back into the outlet box.
7. Attach the canopy to the mounting strap by inserting the nipple, then secure it with a hex nut and finial.
8. Attach the glass shades to the glass holders, then secure them with the socket rings.
9. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
10. Turn on the power at the main fuse or circuit breaker box.

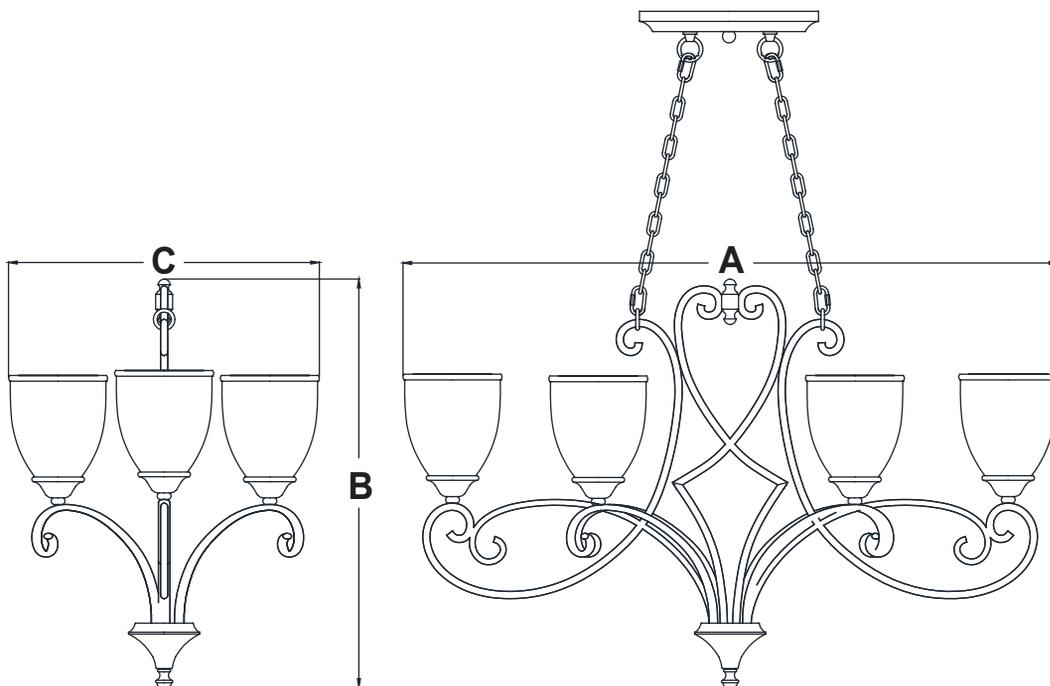

**A: 36"**  
**B: 22-1/4"**  
**C: 19"**