


ASSEMBLY AND INSTALLATION INSTRUCTIONS

P0004

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.**

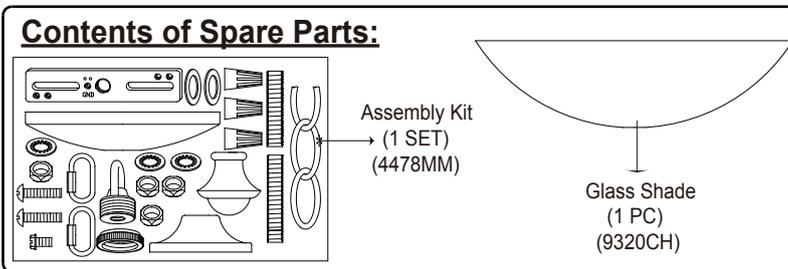

1. Attach nipple(-a) to the mounting strap, then secure it with a washer and hex nut.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Secure the top assembly to nipple(-c) on socket base.
4. Secure the loop to nipple(-b).
5. Adjust the arms of the fixture according to the drawing of the package.

Important:

a. The arms should be positioned with equal distances between them.

b. The arms should be fixed securely.

6. Position the arms to align the set screws on the pan, then secure it with ball nuts. Repeat with the other arms.
7. Choose the length of the chain you need, then weave the fixture wire and the fixture grounding wire through the chain. Then connect one end of the chain with the loop by using the loop lock.
8. Secure the top loop to nipple(-a).
9. Thread the fixture wire and fixture grounding wire through the collar, canopy, top loop, nipple(-a) and mounting strap.
10. Connect the other end of the chain with the top loop by using the loop lock.
11. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - The smooth wire (marked) from the fixture to the black wire from the power source.
 - The ridged wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.

Carefully put the wires back into the outlet box.

12. Attach the canopy to the mounting strap by inserting the top loop, then secure it with the collar.
13. Install bulbs(not included). See relamping label at socket area or packaging for maximum allowed wattage.
14. Screw nipple(-d) into the coupling of the socket set, then secure it with hex nut.
15. Slide the glass shade up through nipple(-d), secure it with a rubber pad, metal pad and hex nut. Slide the cover up to the glass shade and secure it with finial.
16. Turn on the power at the main fuse or circuit breaker box.

