



# ASSEMBLY AND INSTALLATION INSTRUCTIONS

P0005 / P0006

**WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.**

**NOTE:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Contents of Spare Parts:

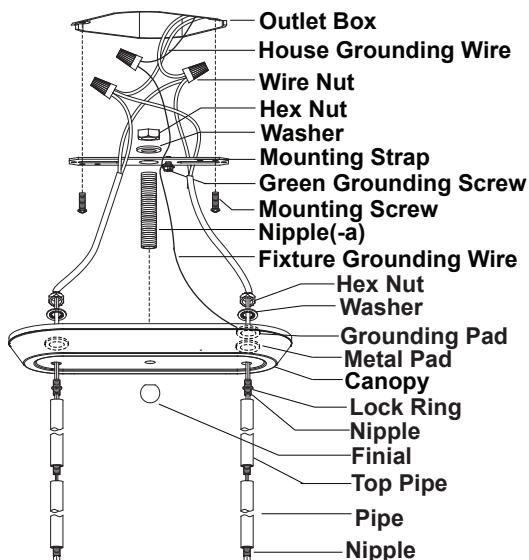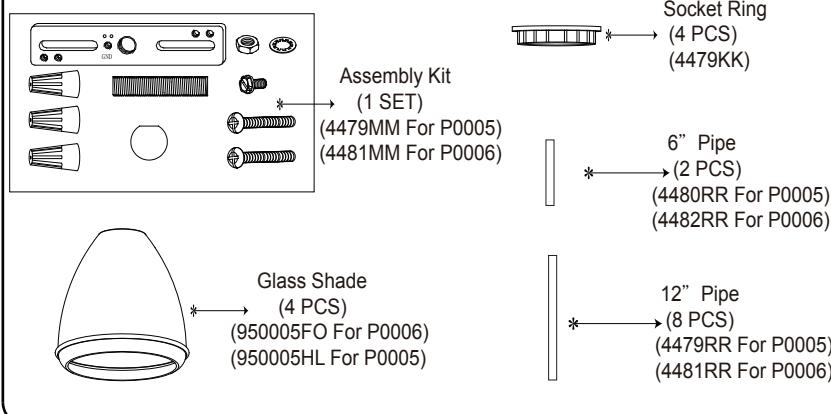

1. Attach the nipple(-a) to the mounting strap, then secure it with a washer and hex nut.

2. Attach the mounting strap to the outlet box by using two mounting screws.

3. Two sizes of the pipes, 6 " L (x2) and 12 " L (x8), are attached in the hardware package, choose the desired installation height you need. Then thread the fixture wires through the pipes and nipples as shown in the right graph.

**The height can be adjustable to**

**14-3/4 " , 26-3/4 " , 38-3/4 " , 50-3/4 " or 62-3/4 " by using the pipes.**

4. Screw all pipes together until securely by using the nipples, and then lock to the bar securely.

5. Slide the canopy down through the nipple of the top pipe, secure them respectively with spring pads, hex nuts and grounding pad. See the graph for correct location.

6. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire nuts:

---The black wire from the fixture to the black wire from the power source.

---The white wire from the fixture to the white wire from the power source.

---Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.



Carefully put the wires back into the outlet box.

7. Attach the canopy to the mounting strap by inserting the nipple, then secure it with a finial.

8. Attach the glass shades to the glass holders, then secure them with the spacer and socket rings.

9. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.

10. Turn on the power at the main fuse or circuit breaker box.

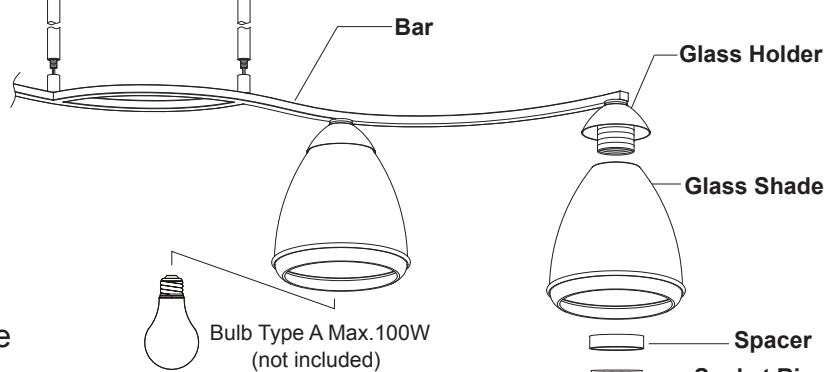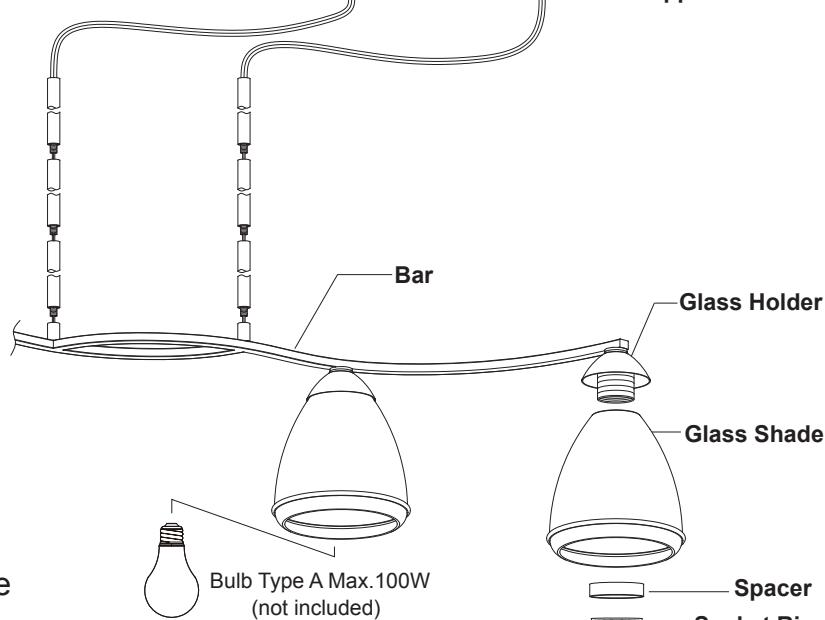

Bulb Type A Max.100W  
(not included)

