


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0053

**WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.**

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.**

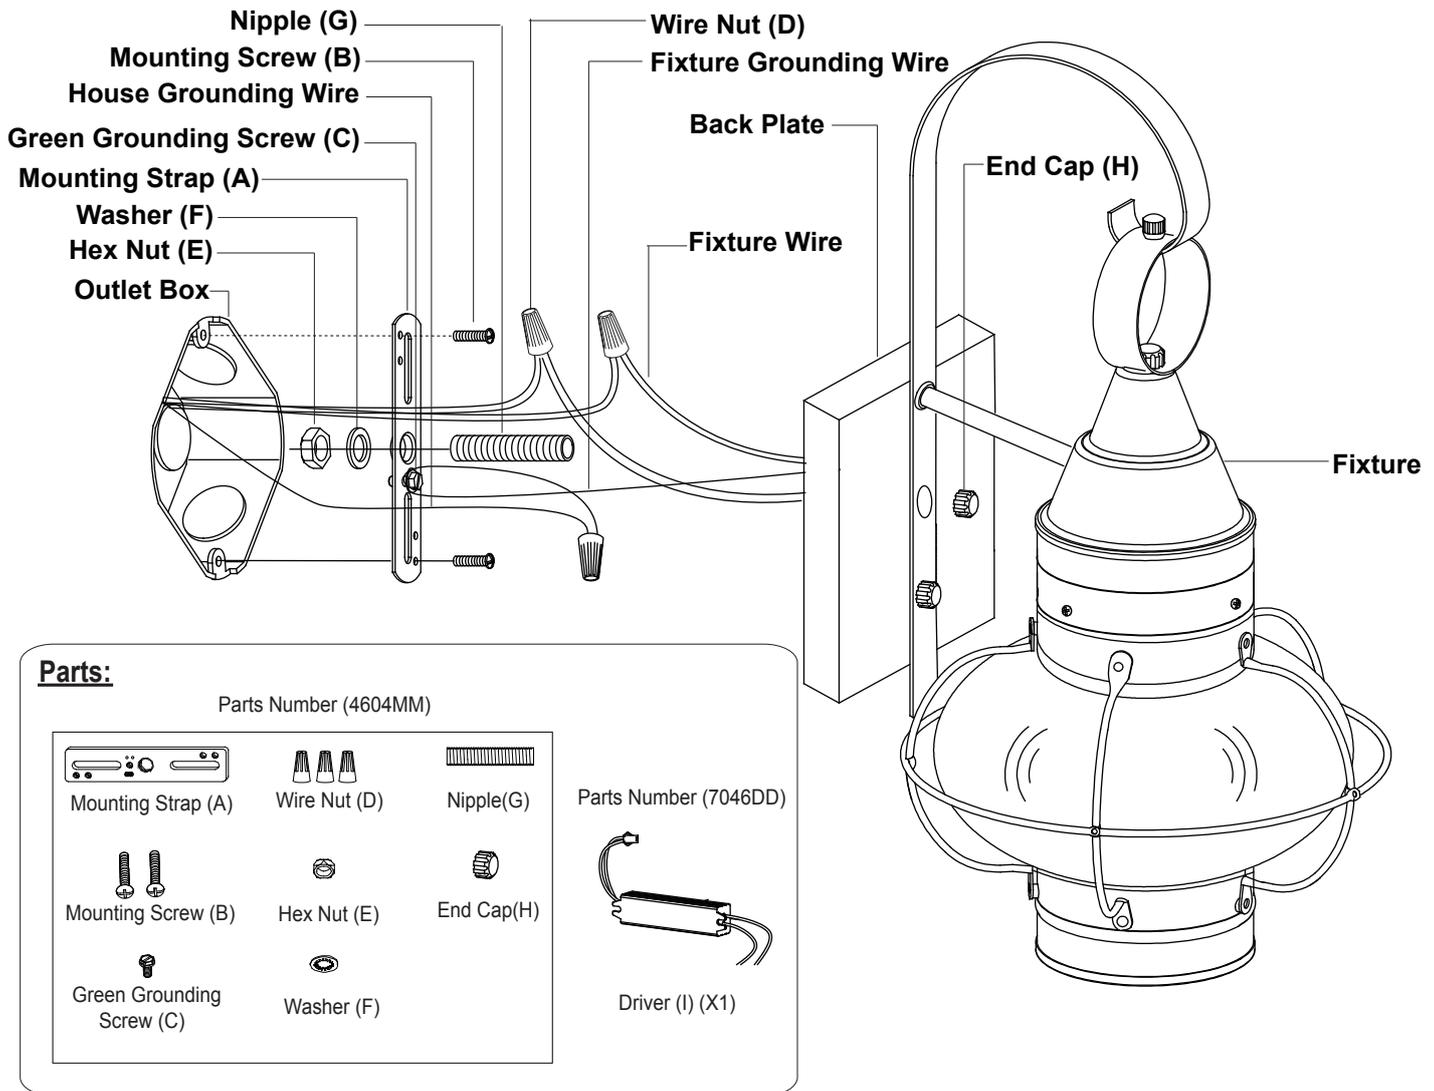

1. Attach the nipple to the mounting strap, then secure it with a washer and hex nut.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections by using the wire nuts:
  - The black (hot) wire from the fixture to the black (hot) wire from the power source.
  - The white (neutral) wire from the fixture to the white (neutral) wire from the power source.
  - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.

Carefully put the wires back into the outlet box.


4. Attach the fixture to the mounting strap by inserting the nipple, then secure it with the end cap.

**CAUTION: With silicone caulking compound, caulk completely around where the back plate meets with the wall surface to prevent water from seeping into the outlet box.**




5. Non-replaceable warm white LED Bulb.
6. Turn on the power at the main fuse or circuit breaker box.  
**Note: The driver is replaceable!**

## Replace the Driver (For T0053)

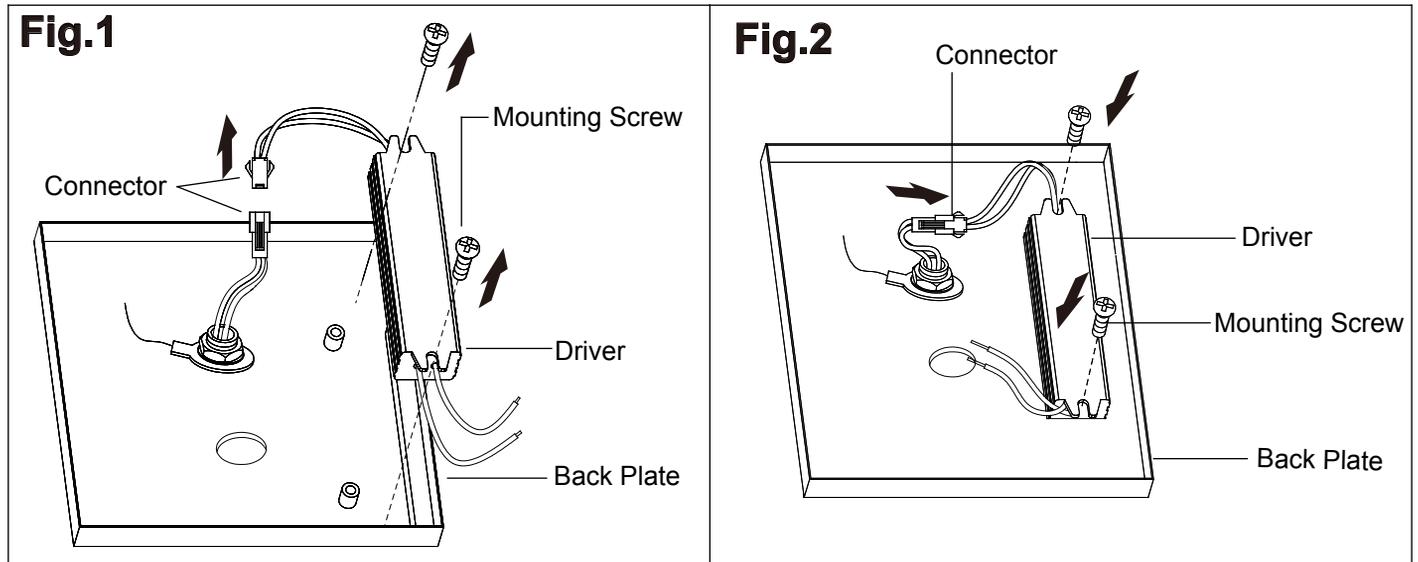

1. Turn off the power at the main fuse or circuit breaker box.
2. Unsecure the end cap, carefully remove back plate from outlet box.
3. Pull out the wires from the outlet box, Loosen the wire nuts connected with the old driver.
4. Loosen the connector connected with the old driver as shown. Unscrew two mounting screws from back plate. (Fig.1)
5. Remove the old driver and replace a new driver into back plate. Secure it into position using two mounting screws. make wires connections using connector.(Fig.2)
6. Make wire connections using wire nuts:
  - Connect the black (hot) wire from the fixture to the black (hot) wire from the power source.
  - Connect the white (neutral) wire from the fixture to the white (neutral) wire from the power source.
  - Attach the fixture grounding wire to the cross bar with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
 Carefully put the wires back into the outlet box.
7. Attach the fixture to the mounting strap by inserting the nipple, then secure it with the end cap.  
**CAUTION: With silicone caulking compound, caulk completely around where the back plate meets with the wall surface to prevent water from seeping into the outlet box.**
8. Turn on the power at the main fuse or circuit breaker box.

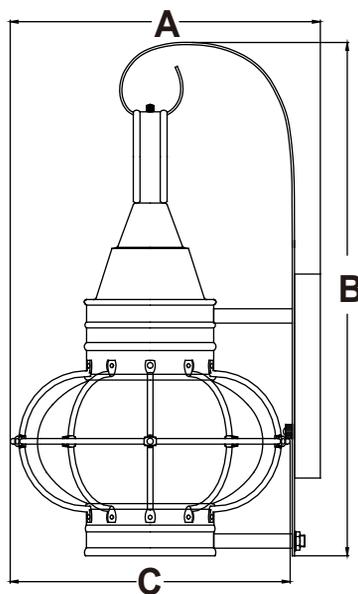

**A: 10-3/4"**

**B: 18-1/8"**

**C: 9-1/2"**