
HZ349300TX Shelf- Black HZ349400TX Shelf- White

Assembly Instructions



For assistance with assembly contact: Southern Enterprises Inc. Customer Service 1-800-633-5096


> service@seidal.com www.seidal.com

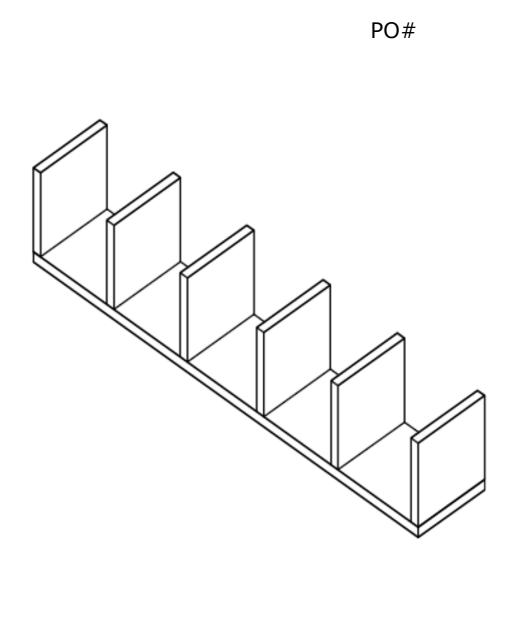

Shelf


Parts List

Please check packaging for all parts and hardware before discarding. Unpack and lay parts on clean, padded surface like carpet or blanket. Check that you have all parts indicated. Call customer service if hardware is missing. Before beginning assembly, carefully study the diagrams below and sort your hardware according to the pictures.

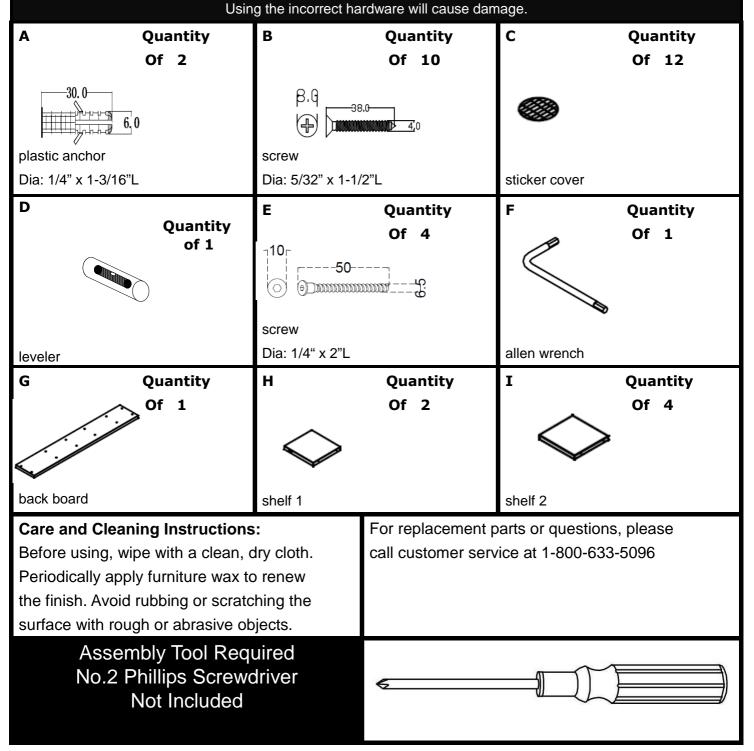


Tool List: 3/16" drill bit, drill, tape measure and pencil

Shelf Assembly Instructions

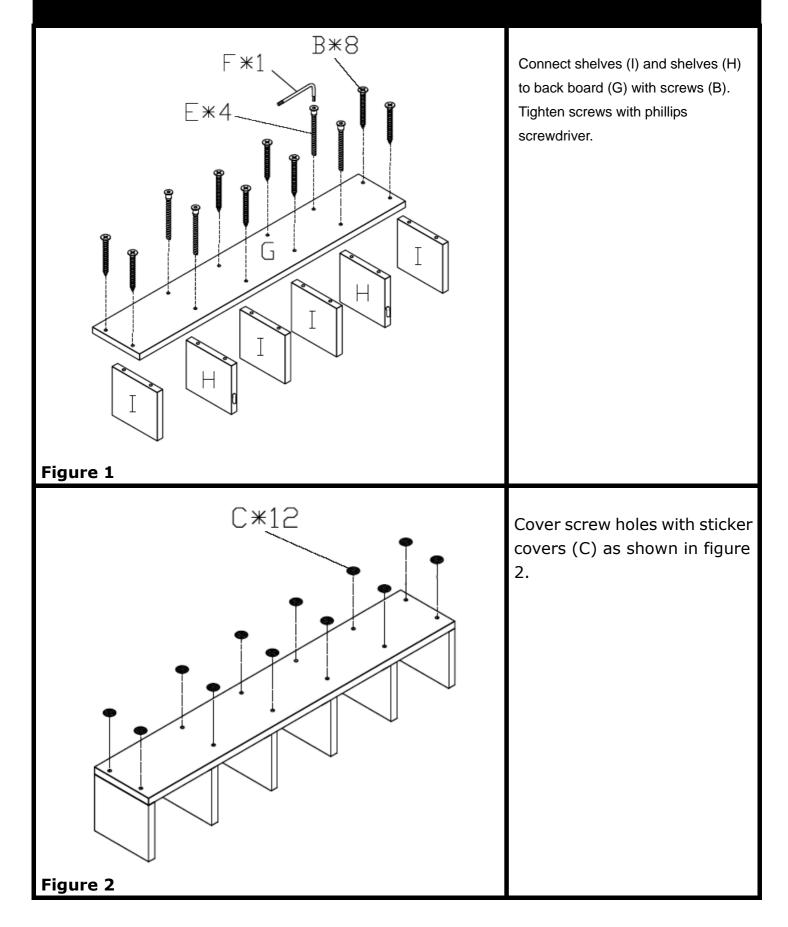


NOTE: NO DRILLED HOLE OR PLASTIC ANCHOR REQUIRED WHEN MOUNTING TO WOOD WALL.USE SCREW ONLY. WE DO NOT SUPPLY HARDWARE FOR MOUNTING ON CONCRETE WALLS

Wall



"The hole measurements on wall must match with the hole measurements on back of the unit"



Find a desired location and mark two locations for the screws.

One screw (for each unit) must be attached directly into a wall stud. Wall anchor is not needed when mounting to wall stud.

Drill one marking 3/16" hole (for each unit).

Insert plastic anchor (A) into the hole on wall as shown, you will need a hammer when doing this.

Using the phillips head screwdriver, install one screw (B) into the anchor (A) and the other screw installed into the stud. Turn the screws (B) until there is a gap of approximately 13 mm between the head of the screw and the wall as shown.

Hang assembled unit onto the screws (B) and verify the shelf is resting securely on the mounting screws (B).

Use a leveler to insure product is level.

Now you shelf is ready to use.



Figure 3

Parts Replacement Form			
Customer Information			
Name			
Address			
City/State/Zip Code			
Phone Number			
Please indicate where you purchased this item: Store/Website/Catalog			
Please indicate color/size	/style number:		
Style No Needed	Parts Letter	Parts Description	Quantity

Please immediately examine this product carefully. Any request for missing parts or damage replacement must be received within 90 days of your receipt of the product. Replacement, if available, will be honored within this time frame. Parts will not be available for items arriving fully assembled. We do not recommend modifying product(s) and we are not responsible for any damages due to product modification(s). If damages or missing parts are not reported within 90 days of your receipt, we are under no obligation to provide parts or replacement merchandise.

Please contact Southern Enterprises at 800-633-5096 or in Dallas 972-869-0111/ 9am – 4pm Mon-Fri Central time if you have product issues or email us at service@seidal.com. Please ask for customer service representative for issues involving damages or replacement parts. Please ask for technical assistance representative for any issues with product and assembly/construction. Please contact the retailer that you purchased from for returns.



Customer Service 1-800-633-5096 service@seidal.com Southern Enterprises Inc. 600 Freeport Parkway, Suite 200 Coppell, Texas 75019



Max shelf load capacity is achieved by mounting screw into studs or cement walls.

If mounting to sheet rock (cavity wall) it is advisable to mount at least one screw (without anchor) directly to a wall stud or studs. However do not leave either end of mounting bracket unsupported by at least one anchor. For hollow wall mounting you can use any of the holes in the back plate to suit where you require the mounting screws positioned.