

tile-tape

**MOLD-PROOF PVC/NYLON
COMPOSITE TAPE**

**Straight, strong,
and water-proof
flat seams and
inside and outside
90° corners.**

Product Description

- Prevents leaks caused by common grout cracks.
- Will not cut or snag with notched trowel when applying tile setting compound.
- Mold-proof. Rust-proof.
- Four times stronger than mesh tape.
- Cuts easily with knife or scissors.




Applications

- Designed for horizontal and vertical tile and marble applications.
- Watertight seams.
- Inside and outside 90° corners and off angles.
- Apply over fiber cement board, green board, mold-resistant board, or water-resistant board in wet areas (tubs, showers, tile countertops, tub decks and steps).



Advantages over Competitors

STRAIT-FLEX TILE-TAPE	COMPETITOR MESH TAPE	COMPETITOR PAPER TAPE
Will Not Soften or Sag	Will Not Soften or Sag	Softens or Sags when Wet
Strongest Tape	Strong and Flexible	Thin Weight Paper
Inside/Outside 90° Off Angles and Seams	Inside 90° Corners and Seams	Inside 90° Corners and Seams
Mold-Proof	Mold-Proof	Paper will Promote Mold
Leak-Proof Corners and Seams	Will Leak when Crack Develops	Will Leak when Crack Develops
Will Not Wrinkle or Cut by Trowel or Taping Knife on Inside Corners	Will Wrinkle and may Cut by Trowel or Taping Knife on Inside Corners	Will Wrinkle

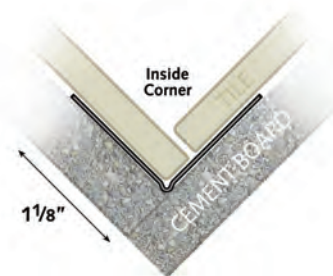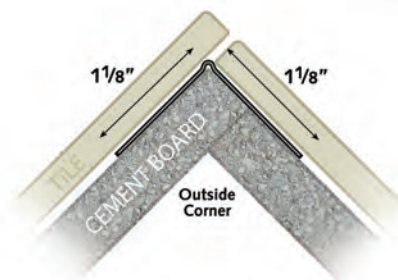

Directions for Use

- 1 Cut Strait-Flex TILE-TAPE to desired length. Fold in half at center crease for inside or outside corners. For inside corners, print-side faces out. For outside corners, print-side faces wall.
- 2 Using a 5" or 6" taping knife, apply a liberal coat of tile-setting compound to flat joints or inside corners.
- 3 Press TILE-TAPE into wet compound. Adjust if necessary to create a straight line and wipe down with taping knife.
- 4 Apply tile-setting compound with notched trowel and install tile or marble.

Specifications

■ 2-1/4" x 50' roll size.	■ 2-1/4" x 50' roll size.	■ 2-1/4" x 100' roll size.	■ 2-1/4" x 100' roll size.
■ Color Code OCEAN BLUE	■ Color Code OCEAN BLUE	■ Color Code OCEAN BLUE	■ Color Code OCEAN BLUE
■ Item# T-50-6	■ Item# T-50-12	■ Item# T-100-6	■ Item# T-100-12
■ RETAIL PKG 6rls per tray. One tray per case. (6-Pack) Case weight: 8 lbs. 48 cases per pallet.	■ RETAIL PKG 6rls per tray. Two trays per case. (12-Pack) Case weight: 15 lbs. 24 cases per pallet.	■ RETAIL PKG 6rls per tray. One tray per case. (6-Pack) Case weight: 15 lbs. 24 cases per pallet.	■ RETAIL PKG 6 rolls per tray. Two trays per case. (12-Pack) Case weight: 26 lbs. 24 cases per pallet.

Warranty

Strait-Flex products are backed by a lifetime warranty. When applied to a sound structure, built on a permanent foundation using recommended application techniques, we warrant that these products will not edge-crack for the lifetime of the structure. Contact Strait-Flex International, Inc. for complete details.

Endorsements

Strait-Flex products are endorsed by the IUPAT (International Union of Painters and Allied Trades) of North America. Strait-Flex products are used in their day-to-day training curriculums.

Check out our website at www.straitflex.com



STRAIT-FLEX INTERNATIONAL, INC. O'FALLON, MO
PHONE: 888.747.0220 FAX: 636.300.0414
STRAITFLEX.COM

L560909