

SPEAKMAN COMPANY

Tiber™ Collection Combination Series SM-11030-P

DESCRIPTION

Speakman Tiber™ Collection Combination Series unites the best products included in our Tiber™ Series. The combination begins with our anti-scald balanced pressure valve with integral stops, featuring a brass body and adjustable temperature limit stop. The wall plate and handle are designed with definitive Tiber™ Collection styling. Piston type pressure balancing/ceramic regulating cartridge assembly with built-in check valves. Meets ASME A112.18.1 / CSA B125.1 & ASSE 1016 standards. Also provided is the S-2561 brass 7" shower arm with metal wall flange. The featured product in the Tiber™ Collection Combination Series is the ANYSTREAM® S-3023 showerhead with a 5" outer spray adjustment ring. Five self-cleaning plunger nozzles resist scale build-up and provide 45 spray streams for a full body coverage pattern. The center core nozzle delivers 12 massaging jets and a combination spray is included. Water-conserving pressure compensating AUTOFLO® device reduces flow to 2.5 GPM / 9.46 LPM maximum, to meet existing ANSI A112.18.1 Standard. Also included in this package is the metal S-1566 tub spout, which features an integrated diverter, matched to the style of the other combination pieces.

SPECIFICATIONS

SM-11000-P Anti-Scald Balanced Pressure Valve:

Connections: ½" female copper sweat inlets & shower outlet; ½" NPT female tub outlet

Flow Rate: For use with
showerheads rated at 2.0 GPM
(7.6 LPM) or higher

S-3023 Showerhead:

Supply: ½" NPT female

Flow Rate:
2.5 GPM / 9.46 LPM MAX

S-2561 Shower Arm:

Supply: ½" NPT male inlet

Outlet: ½" NPT male outlet


S-1566 Tub Spout with Diverter:

Supply: ½" copper pipe slip fit

INSTRUCTIONS

See individual products for installation
of the components and warranty
information.

ROUGH-IN

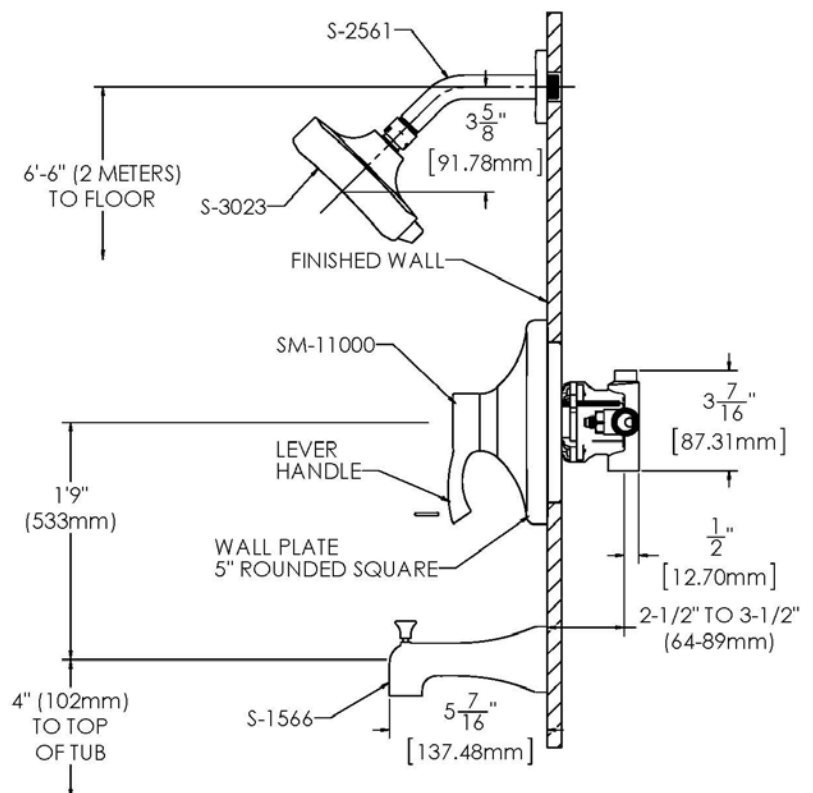

NOTE: FOR ADA MOUNTING LOCATIONS CONSULT ADAAG,
ANSI A117.1 OR STATE REGULATIONS