


Oakwood

Floor Tile Patterns


Interceramic®
CRAFTED FOR LIFE
interceramic.com

SIZES


7-1/2" x 24", 5-1/2" x 24" and 3-1/2" x 24"

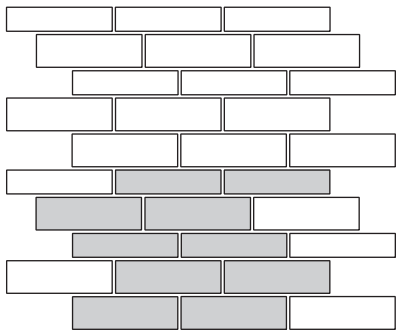


7-1/2" x 24" = 67%
5-1/2" x 24" = 33%

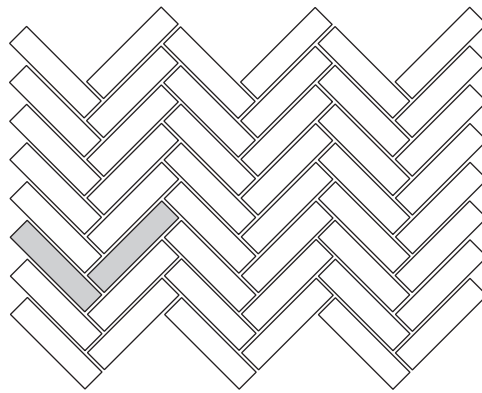


Any Size = 100%

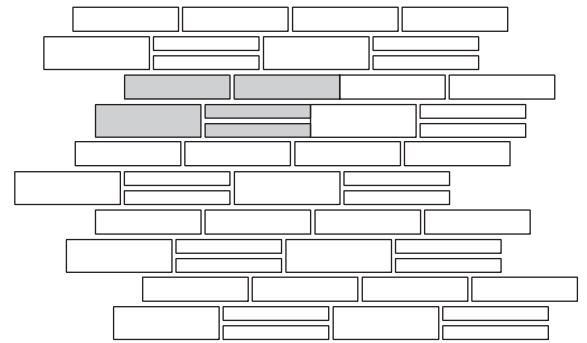


7-1/2" x 24" = 29%
5-1/2" x 24" = 43%
3-1/2" x 24" = 28%

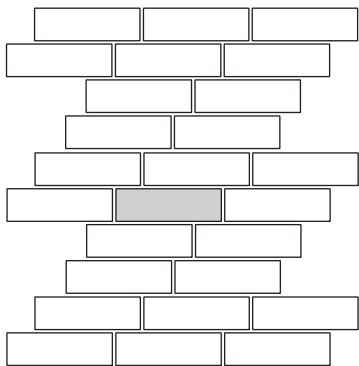

Any Size = 100%

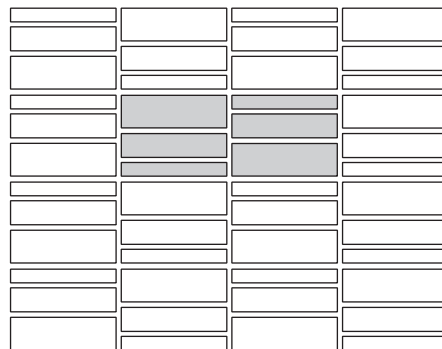

7-1/2" x 24" = 46%
5-1/2" x 24" = 33%
3-1/2" x 24" = 21%

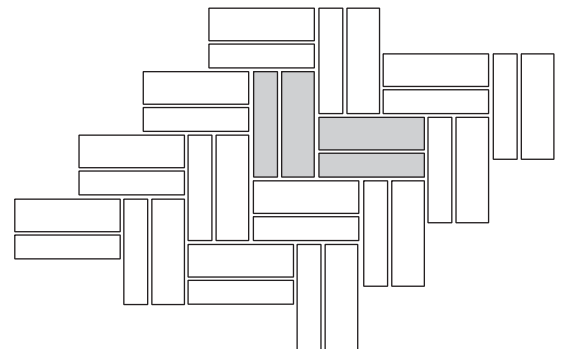

7-1/2" x 24" = 58% 5-1/2" x 24" = 61%
5-1/2" x 24" = 42% 3-1/2" x 24" = 39%

Grout Joint Recommendations:

HD Ceramic Floor Tile up to 24" x 24" non-rectified - 3/16" (5mm)

Running Bond/Brick Joint Offset and Patterns (ANSI A108.1)

For running bond/brick joint patterns utilizing rectangular tiles (rectified or cut) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be maximum of 33% and grout joint width at least 1/8"



Plank Tile Patterns

Grout Joint Recommendations


Interceramic®
 CRAFTED FOR LIFE
 interceramic.com

Grout Joint Recommendations


Running Bond/Brick Joint Offset and Patterns (ANSI A108.1)

For running bond/brick joint patterns utilizing rectangular tiles (rectified or cut) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be maximum of 33% and grout joint width at least 1/8"

Bond Pattern

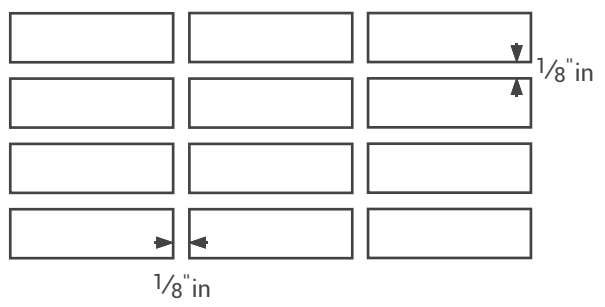

Herringbone Pattern

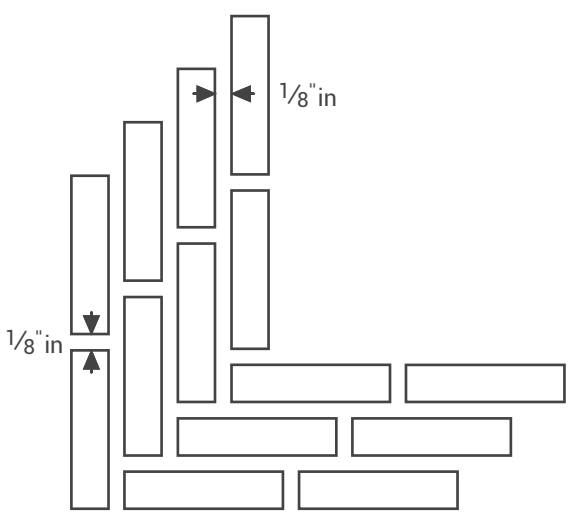

Brick Pattern

