





8" x 16" = 100%















Grout Joint Recommendations:

HD Ceramic Floor Tile up to 24" x 24" non-rectified - 3/16" (5mm)

Running Bond/Brick Joint Offset and Patterns (ANSI A108.1)

For running bond/brick joint patterns utilizing rectangular tiles (rectified or cut) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be maximum of 33% and grout joint width at least 1/8"

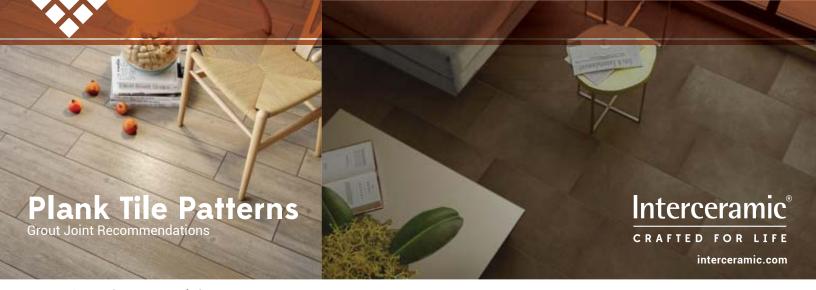


Grout Joint Recommendations


Running Bond/Brick Joint Offset and Patterns (ANSI A108.1)

For running bond/brick joint patterns utilizing rectangular tiles (rectified or cut) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be maximum of 33% and grout joint width at least 1/8"

Bond Pattern



Herringbone Pattern



Brick Pattern

