


adjustable fusion shower pan on wood joists installation guide

Required Components (included)

- a) Adjustable Fusion Shower Pan
- b) Tile Drain
- c) Liquid Waterproofing - 2 gallon bucket (covers approx. 100 sq ft with 2 coats)
- d) Roll of Rubberized Crack Isolation Tape (100 ft)
- e) 2 - Inside corners of Rubberized Crack Isolation Tape
- f) Gasket Membrane
- 24 - 2 1/2" screws
- 12 - 3/4" screws



Note: If you have a larger room and need more waterproofing supplies, please contact us before completing your order.

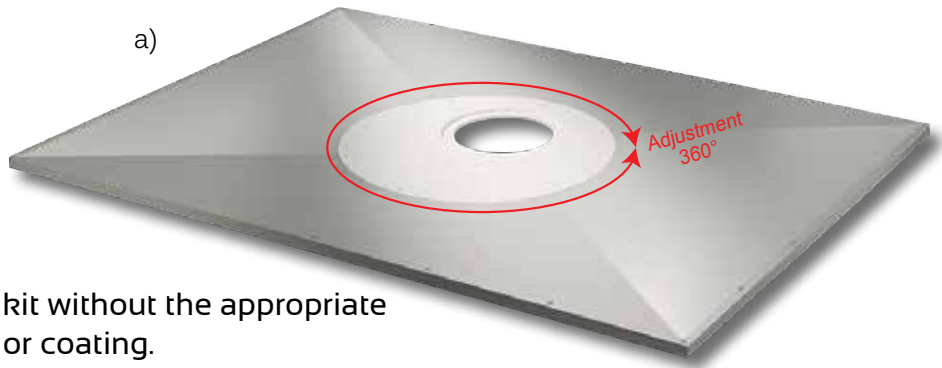


Important: Do not install this kit without the appropriate waterproof-membrane liners or coating.

Required Tools (not included)




- Drill
- Circular Saw
- Reciprocating Saw
- Level
- Square
- Caulk Gun
- Hammer
- Utility Knife or Scissors
- Tape Measure
- Paint Rollers
- Paint Brush
- Belt or Orbital Sander / Sandpaper
- Latex or Acrylic Caulk (**DAP Dynaflex 230**)
- Solvent cement & primer
- Construction adhesive
- Splash Goggles
- Chemically resistant or impermeable gloves

..... for adjustable fusion shower pan on wood joists

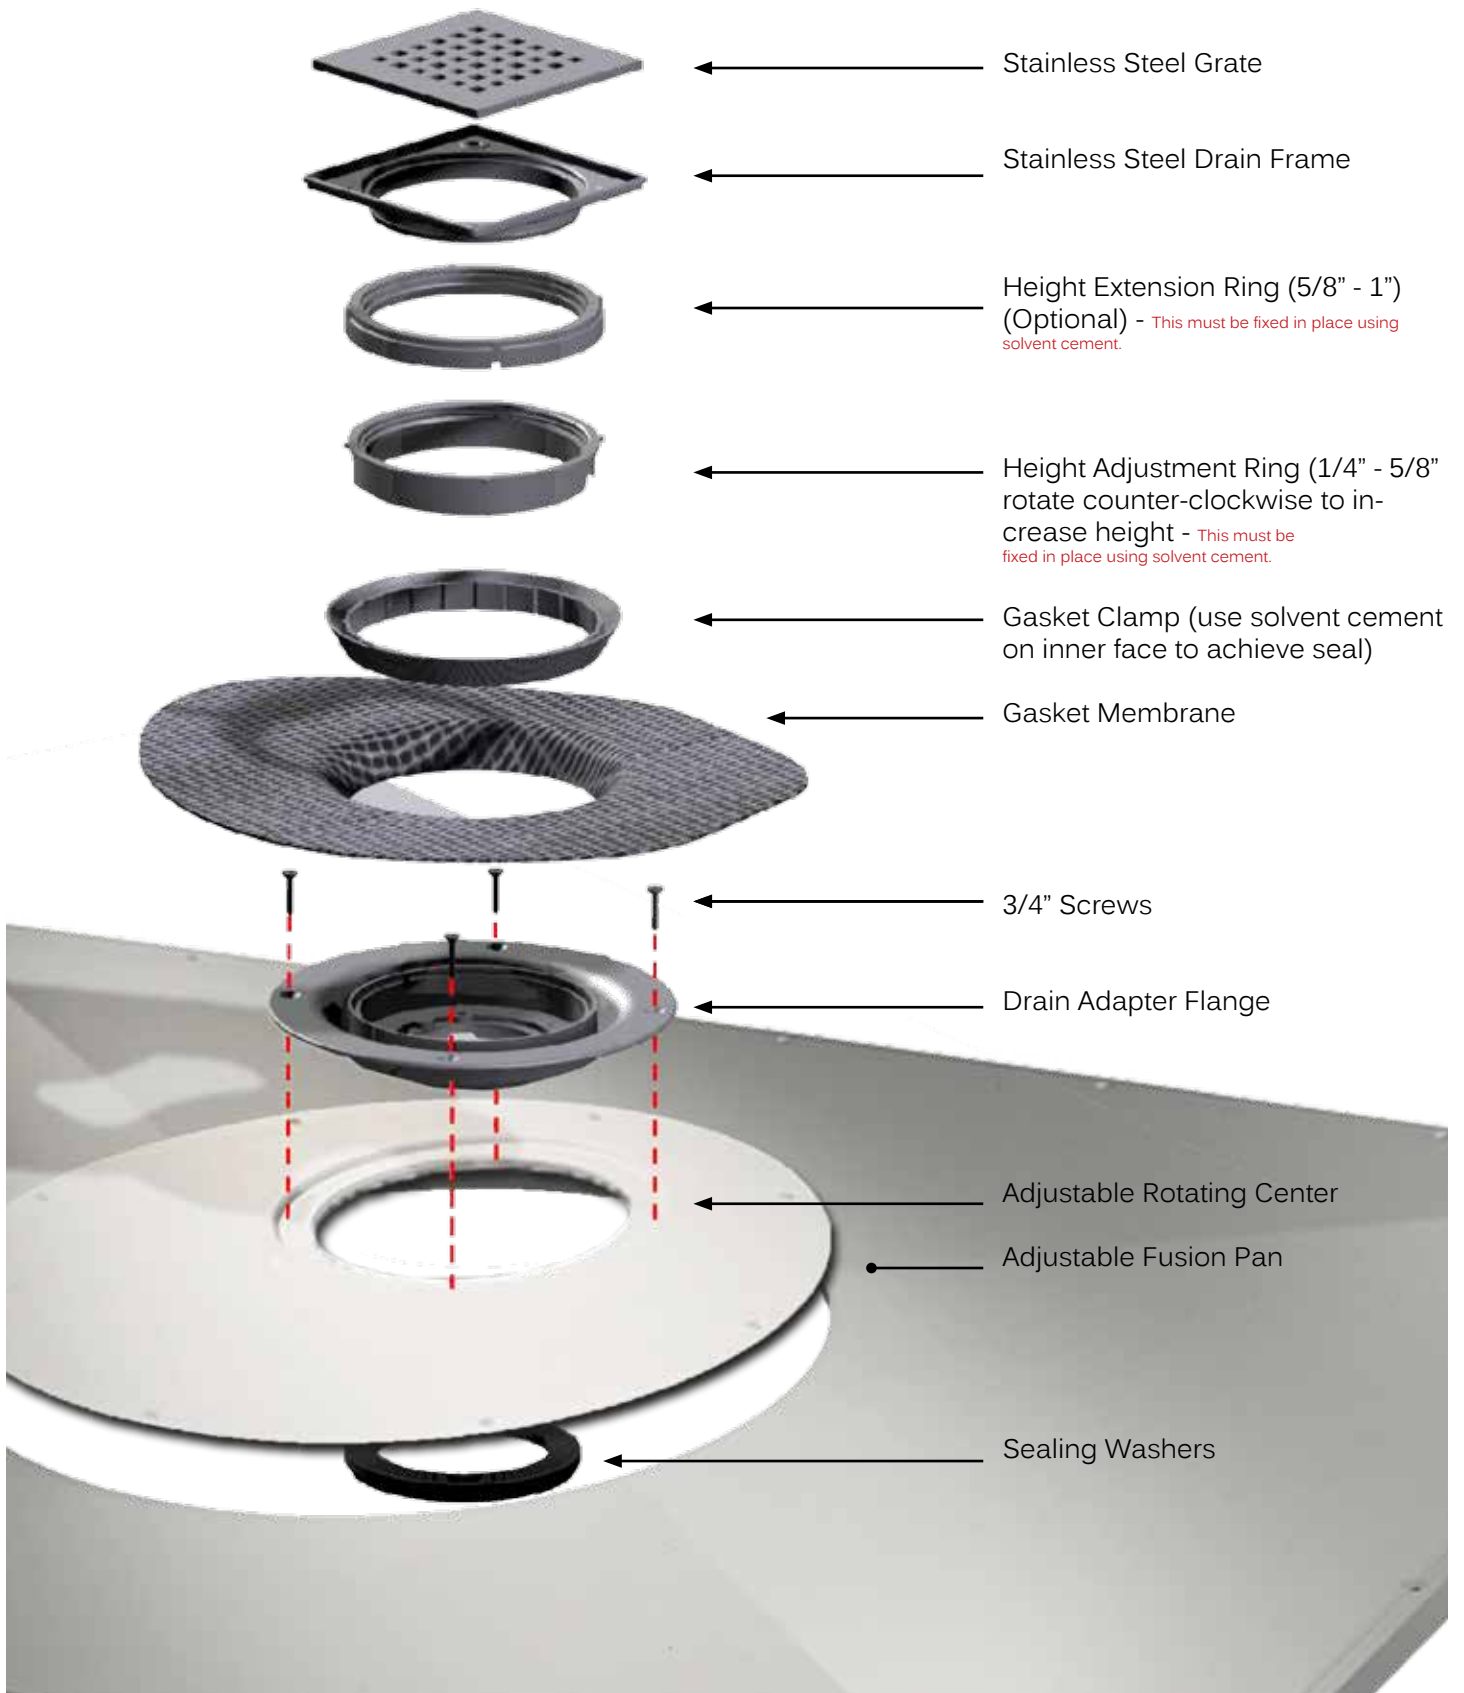

Step 1 > > > > > > >


For optimal performance, it is imperative there is a level surface prior to installation of new Fusion pan. Check existing floor to make sure it is level. If it is not, please correct prior to installation.

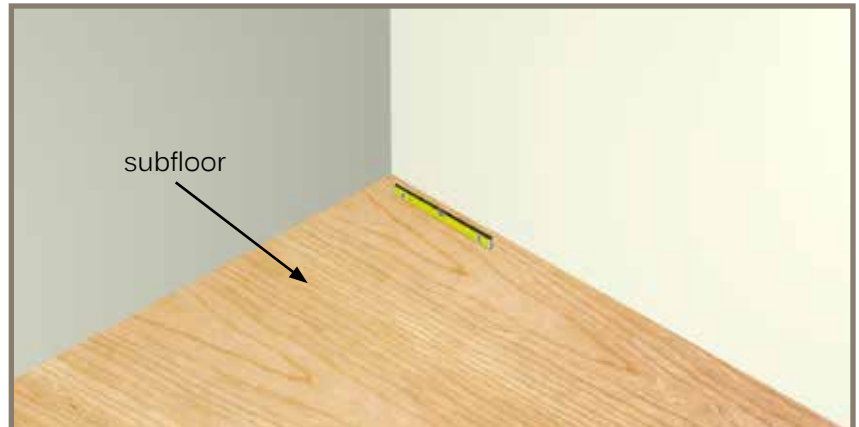

Step 2 > > > > > > >

Place the Fusion pan in desired location and mark the edge of the pan on the subfloor.

Note: If the Adjustable Fusion Pan needs to be trimmed, follow the guidelines on page 12.

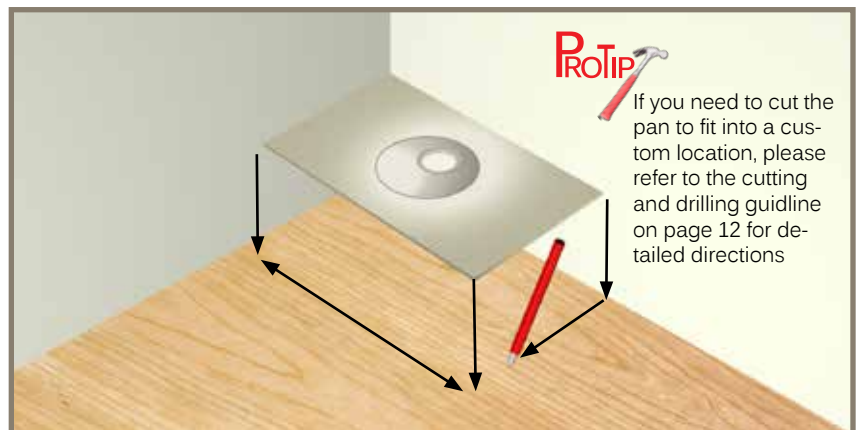


Step 3 > > > > > > >

Carefully cut along your line as accurately as possible. Make sure to adjust the depth of your saw to the thickness of the subfloor as to not cut through the joists. Note: If possible, please check or mark location of existing plumbing and electrical to avoid damaging them.




Step 4 > > > > > > >

Remove the cut section of subfloor to expose the joists.

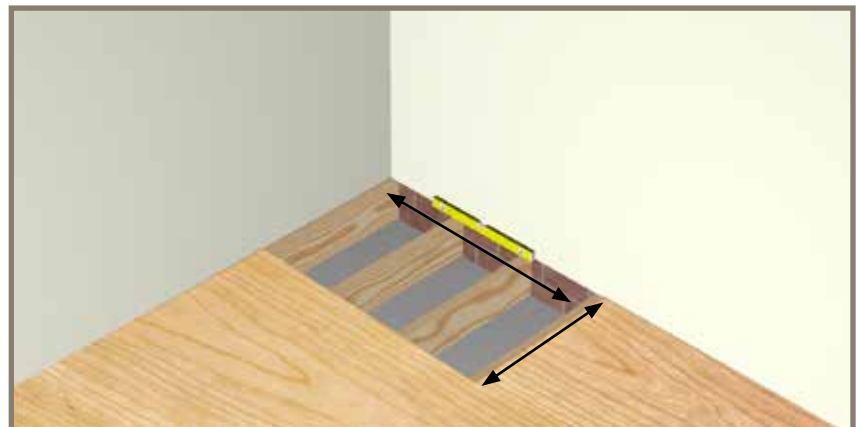


Step 5 > > > > > > >

Install 2x stock to match existing joists, and block around the perimeter of the Fusion Pan, around the drain, and any unsupported edges of the subfloor. This will ensure full support of Fusion Pan, and existing subfloor.

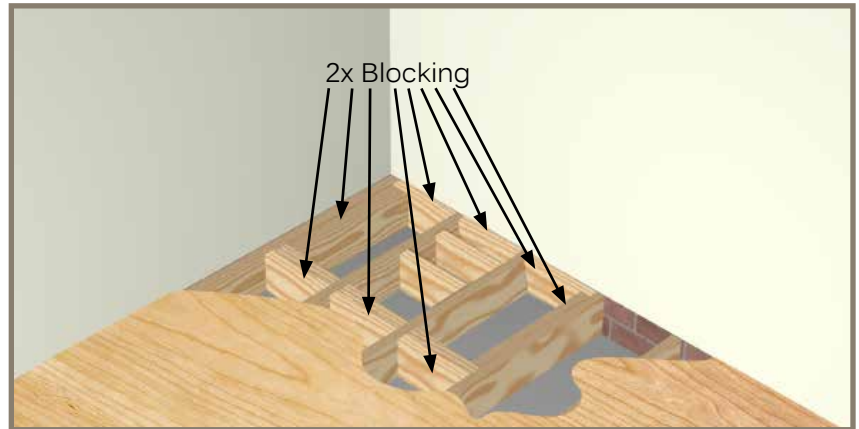


Step 6 > > > > > > >

Place the Adjustable Shower Pan into place. Make sure that pan is level and fits snugly into place.

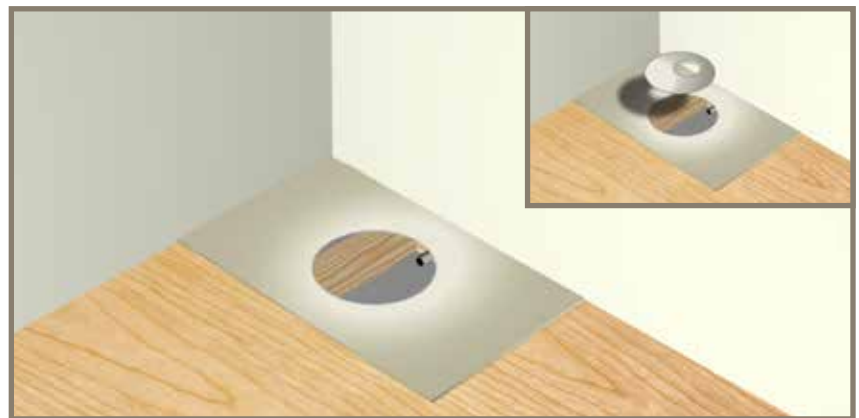


Step 7 > > > > > > >

We now want to make sure that the rotating plate lines up with the waste line. First, Insert the rotating plate onto the Adjustable Shower Pan. If the drain position lands over a joist. Simple rotate the plate until free of obstacles.

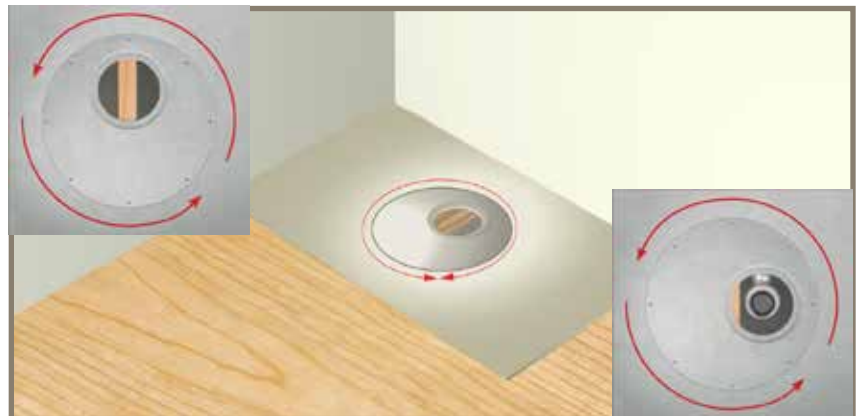

Step 8 > > > > > > >

Once plate is set in the desired location, mark the orientation on the plate and the pan. This will ensure that you have the plate properly aligned when you go to reinstall it later. While in place, measure the location of the center of the drain. Take four measurements, from the outer edges of the pan to the center of the drain. You will need these measurements to position the center of the waste line.

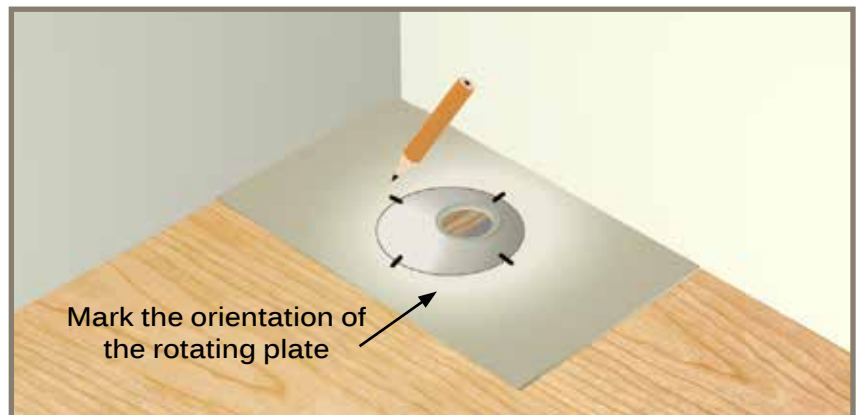


Step 9 > > > > > > >

While the plumbing is exposed and accessible, make all necessary connections to the waste line. Use your measurements from the previous step to make sure to position the waste pipe so that it aligns with the drain hole.



Step 10 > > > > > > >

For your dry run, position the Fusion Pan into place and check to make sure the pan is level. If you notice any rocking or flexing in the pan, you may need to shim or shave areas.

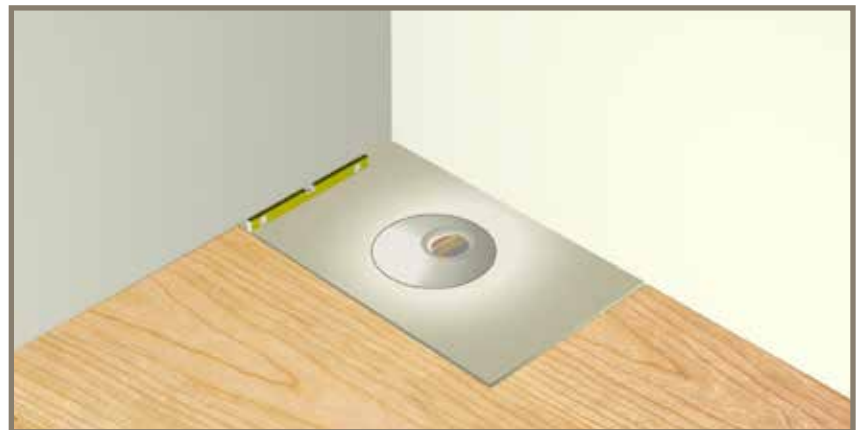

Step 11 > > > > > > >

IMPORTANT: You must sand the top of you pan lightly with a palm or belt sander to roughen up the surface for proper adhesion of waterproofing.

Make sure the sticker is completely removed.



Step 12 > > > > > > >


To prep for permanent installation, remove the Fusion Pan from the surface. Apply a generous amount of construction adhesive to the joists and blocking.



Step 13 > > > > > > >


Carefully set the Fusion Pan into place. Using the 2 ½" screws provided, attach the pan. Do not aggressively screw and over tighten, as you may force the Fusion Pan out of level.

Pre-drill the holes for the rotating plate. Then apply a bead of caulk (**Recommended: DAP Dynaflex 230**) to the rotating plate receptor. Now attach the rotating plate using the ¾" screws provided. Be sure to match up your tick marks done in step 8. Refer to the Cutting and Drilling guideline on page 12

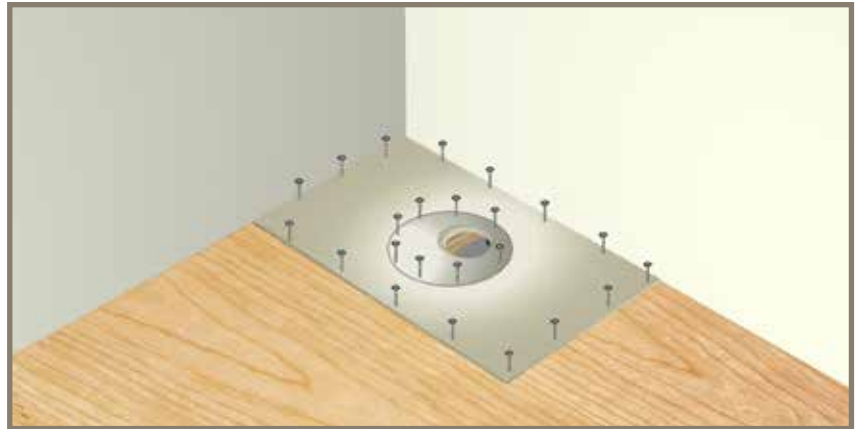

Step 14 > > > > > > >

On top of existing subfloor install cement backerboard in preparation for tiling. Make sure that the top of the backerboard is roughly 1/8" higher than the Fusion Pan.

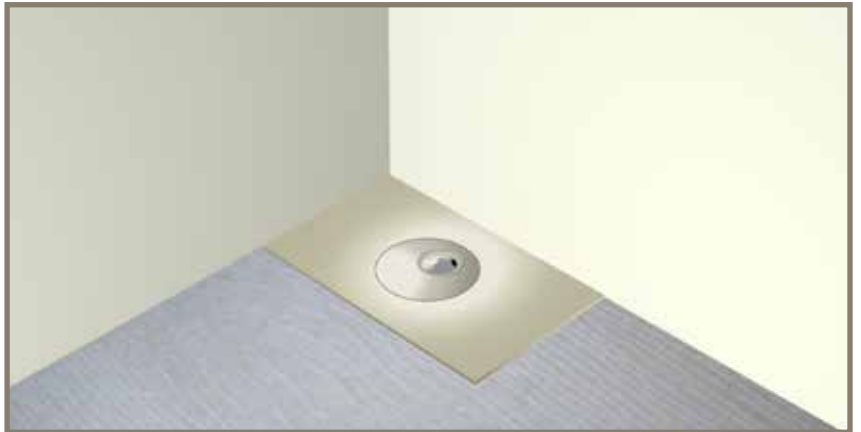

Step 15 > > > > > > >

Check that the Fusion Pan is level on all four sides.

Fill in any gaps around the perimeter of the pan over 1/8" with latex or acrylic caulk.

Recommended: DAP Dynaflex 230

Do not use 100% silicone.




Step 16 > > > > > > >

You now want to attach the Drain adapter flange to the Fusion Pan.

First, set the adapter in place, mark the 4 holes, and pre-drill them with a 1/8" bit.

Then apply a bead of caulk (**Recommended: DAP Dynaflex 230**) to the underside of the drain adapter flange. Lightly push the flange into place, and screw it down using the four ¾" screws provided. Remove any excess caulk that squeezes out.

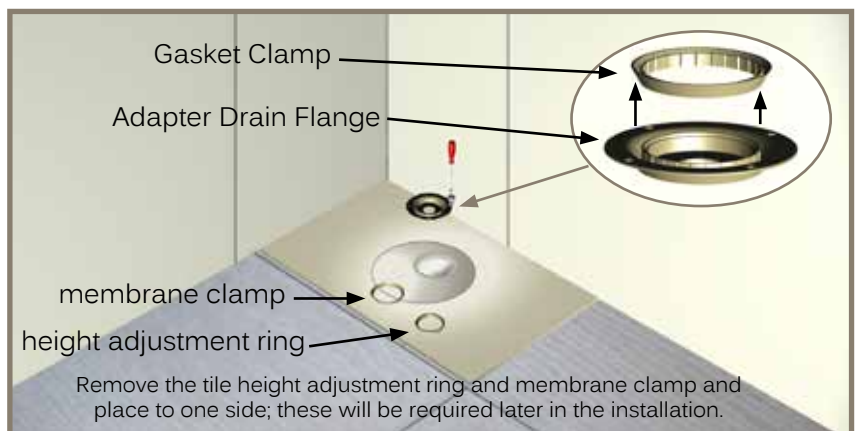

Step 17 > > > > > > >

Make your final connections to the drain. First apply a bead of caulk (**Recommended: DAP Dynaflex 230**) to the underside of the strainer body. Pass the strainer through the drain adapter flange, and tighten. Make sure connection is snug but do not over tighten.



Step 18 > > > > > > >

You will now begin waterproofing the wet room.

BEST PRACTICE: To achieve the best results, we recommend waterproofing the whole room.


Minimum requirements, shown in these instructions, show you that you only have to waterproof the shower zone, which is 6 ½ feet high and about 2 feet outside of the showering area.

Materials needed for wet room waterproofing.



Step 19 > > > > > > >

Begin taping the wetroom floor at the interior corners of the Fusion Pan using the corner pieces of the crack isolation tape provided. Using a paint brush or trowel, slather liquid waterproofing into corner, press piece into place, then apply liquid waterproofing on top. Make sure to smooth out any creases. Repeat for additional corners.

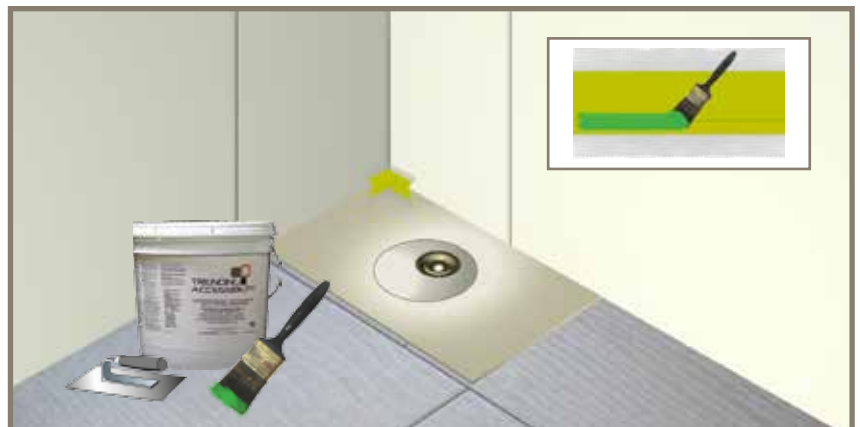


Step 20 > > > > > > >

Using the 5" crack isolation tape provided, cut strips of tape to length, to cover all seams (Corner seams, wall/floor seams, pan/floor joint). Put pieces aside.


If you are creating full wet room, you will need to tape any seams throughout the entire room.

If you are only waterproofing the shower zone, you will only need to tape the seams up to 2 feet outside the shower area.

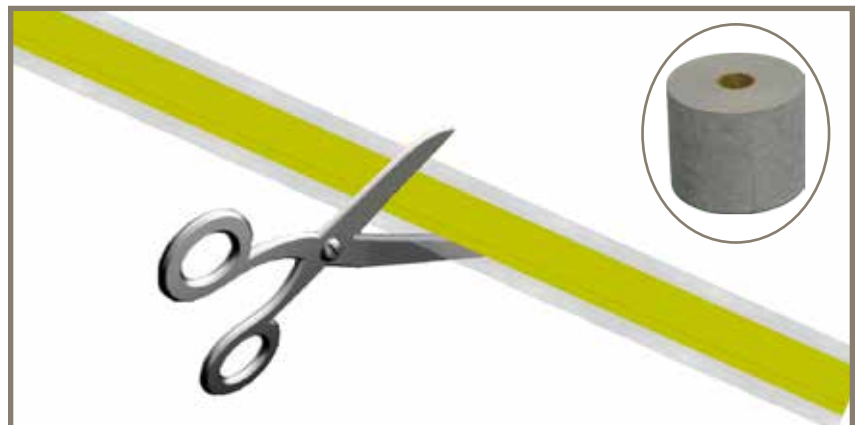

Step 21 > > > > > > >

Just like you applied the corner pieces, use your cut strips of Crack Isolation Tape to cover all the seams. Again, trowel or paint liquid waterproofing onto seam, press tape into position and coat the top to seal. Make sure to fully cover both sides of the crack isolation tape with the liquid waterproofing product. To make this process more manageable, it is best to work in two foot sections.

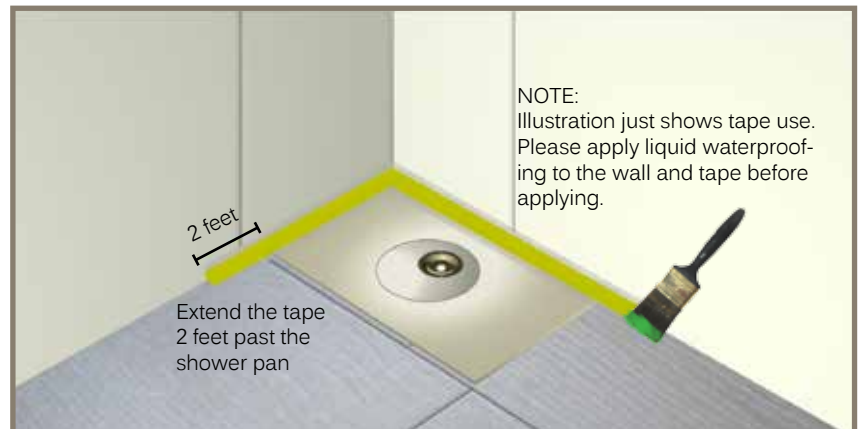

Step 22 > > > > > > >


Using the 5" crack isolation tape. Overlap all seams of cement board used on either the floors or walls. Overlap the seam where the Fusion pan and cement board meet.



Step 23 > > > > > > >

Using the provided precut piece of gasket membrane, slather area where gasket piece will be adhered to the drain area. Place over drain adapter flange, making sure to cover all screw holes, and securely press down into flange. Coat top of gasket piece with liquid waterproofing.

Important: Remember to remove the clamping ring prior to placing drain gasket.

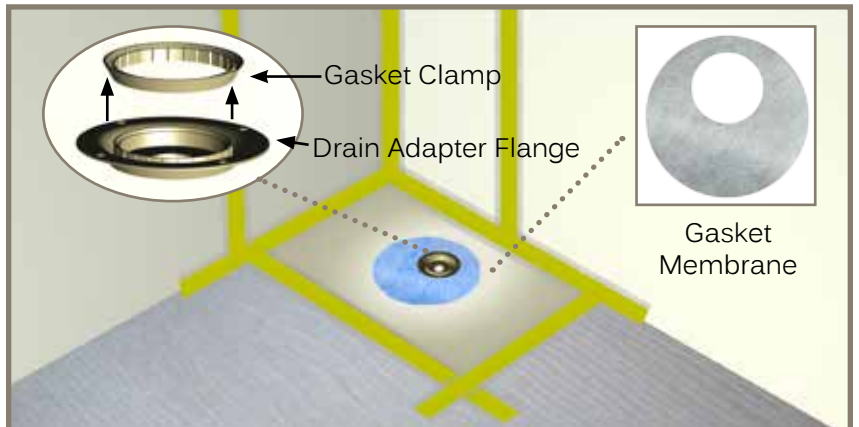


Step 24 > > > > > > >

Now attach the clamping ring. Apply primer and solvent cement to inside of clamping ring. Press firmly into position and allow the solvent to set.


It may take about 60 seconds for the cement to form a bond.

NOTE: Do not allow the solvent cement to come into contact with the membrane

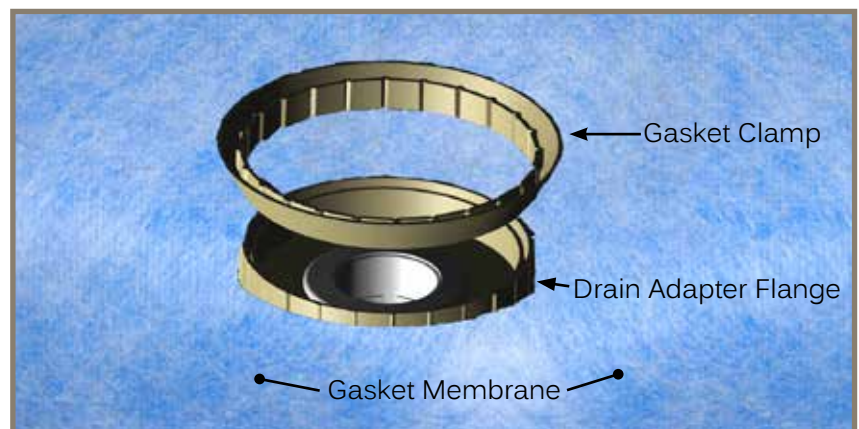

Step 25 > > > > > > >


Continue the application of the liquid waterproofing membrane. Paint a layer of liquid waterproofing over all taped joints. It is easiest to begin with the walls first and then proceed to the floor area. For constant application, use a paint roller to apply waterproofing to all surfaces. Allow the waterproofing to dry for about 4 hours. After first coat is dry, re-coat in the opposite direction. If you rolled up and down for the first coat, roll left to right on the second coat.

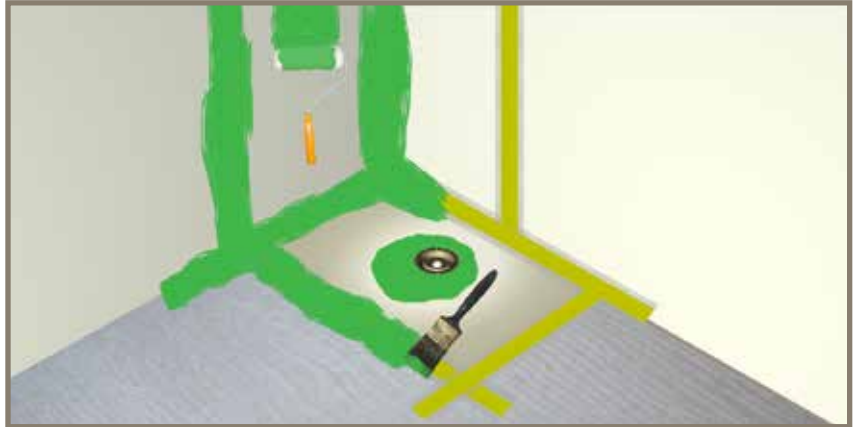

Step 26 > > > > > > >

Apply two coats of liquid waterproofing in opposing directions to achieve 40 mils. (roughly the thickness of a credit card)

Make sure that the "V" section of the gasket clamp is filled with the liquid waterproofing.

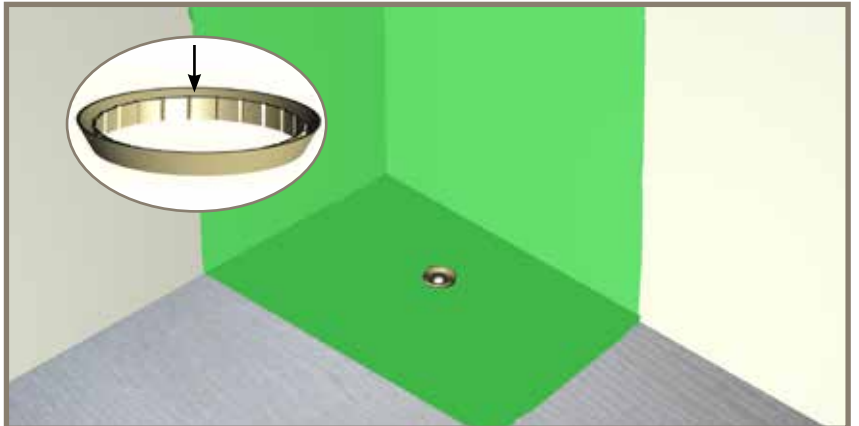

Pro-Tip > > > > > > >

To achieve the best results, we recommend waterproofing the whole room.

The waterproofing must cure for at least 12 hours before flood testing.



If flood testing, perform test before tiling.

Use modified thinset when placing the tile.



Step 27 > > > > > > >


In order to set the correct height of the grate frame, you may need to use the height extension ring (see diagram to the right). If the height extension ring is required, it will need to be fixed to the height adjustment ring using solvent cement. The grate frame can now be attached to the height adjustment or extension ring, depending on tile thickness. This is done by using firm pressure to clip the components together; it is a tight fit.

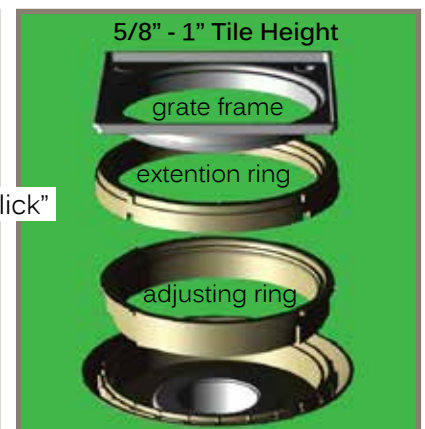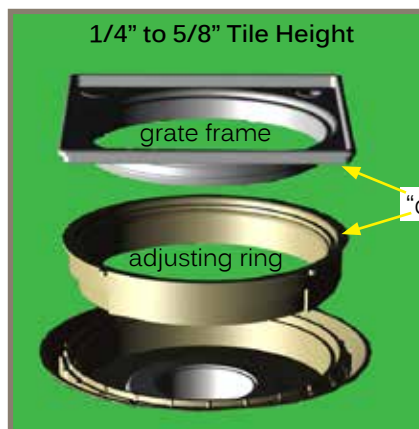

Step 28 > > > > > >

The height adjustment ring and floor drain bowl must now be fixed together using solvent cement. Because solvent cements sets very rapidly we strongly recommend the adjustment is done "dry" first.


To set the permanent height of the grate frame, place a floor tile beside the frame. Rotate the frame until the height is about 1/16" higher (this accounts for adhesive thickness). Now mark the position of the adjustment ring. This mark shows the final height position. Remove ring, apply solvent cement, and re-align components to your marked position. It is best to hold securely until pieces are fully bonded.

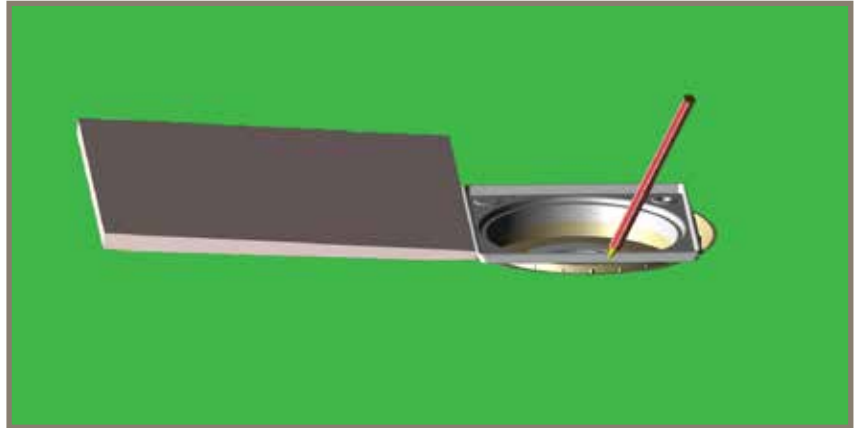

Step 29 > > > > > >

The metal grate frame can be rotated to match the direction of the tile.


You are now ready to tile. If you are using large format tiles, they must be cut diagonally and laid to follow the pitch in the Fusion Pan (From the corners of the grate frame to the corners of the Fusion Pan). Use Tiling Guide below. Apply the tile adhesive (modified thinset), and lay the tiles in a regular pattern.

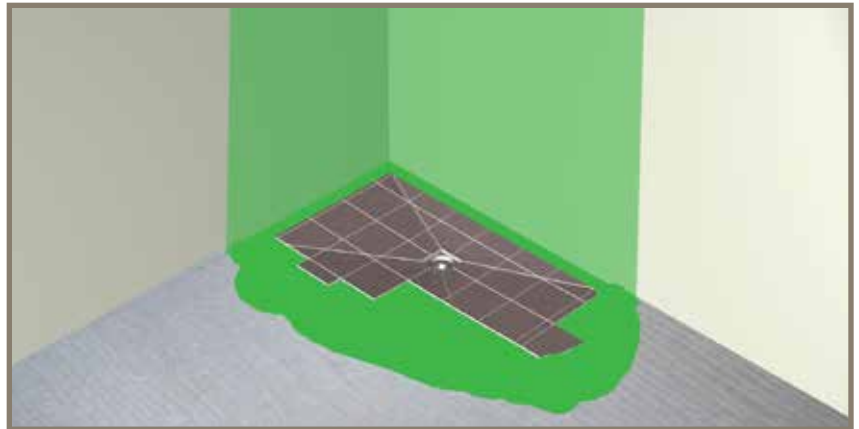

Step 30 > > > > > >


Once your tiling is complete, grout the floors and walls. Finalize by adding the drain grate. It is a friction fit and must be pressed all of the way in.

Your Fusion Pan installation is now complete. Enjoy!

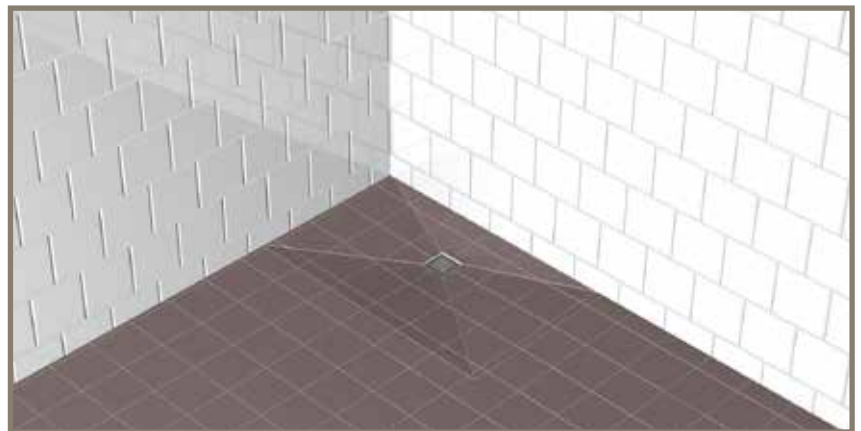


Tiling Guide


Standard drainage position

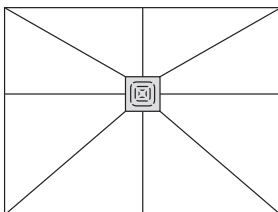


Drainage position 90° to the right

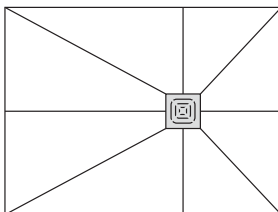

Drainage position 90° to the left

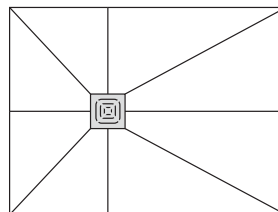

Drainage position less than 90° to the right

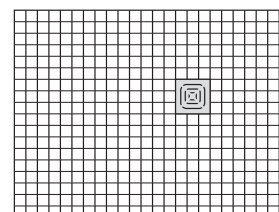

If you cannot rotate the drainage point a full 90°, left or right, it is best to use smaller tiles (maximum size 2.75" square) or mosaic tiles.

Cutting and Drilling Guidelines

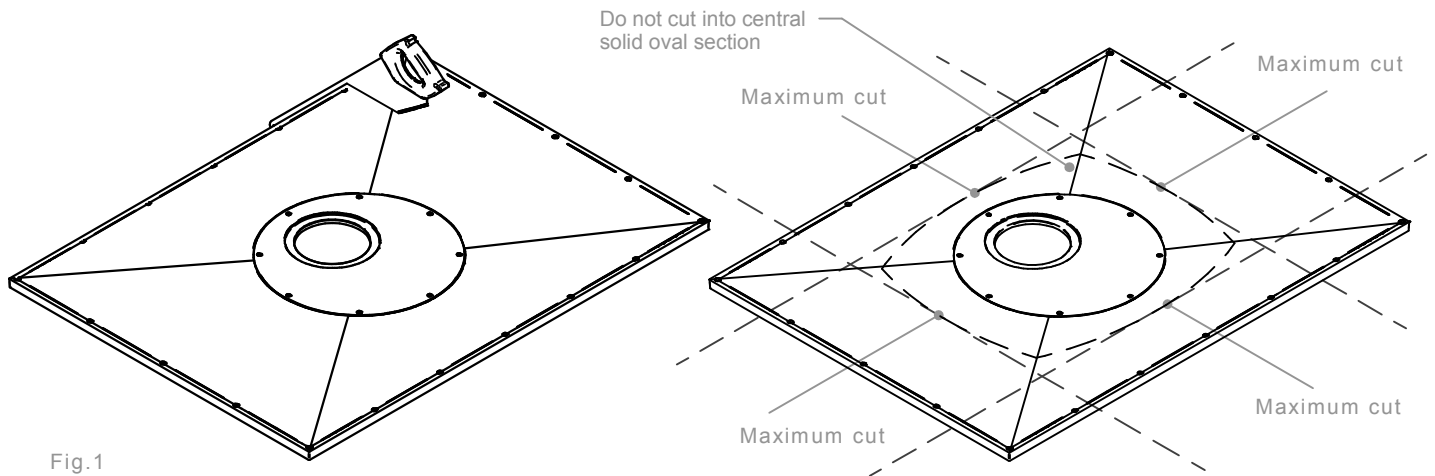


Fig.1
Cut using an old or disposable handsaw.

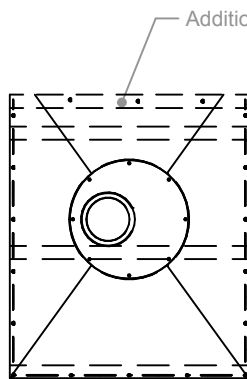


Fig.2
Cut to length.

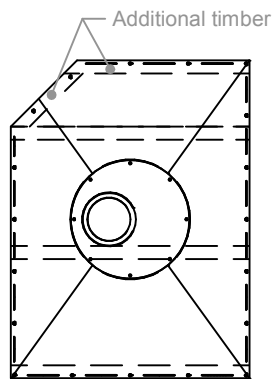


Fig.3
Cut to accommodate diagonal wall.

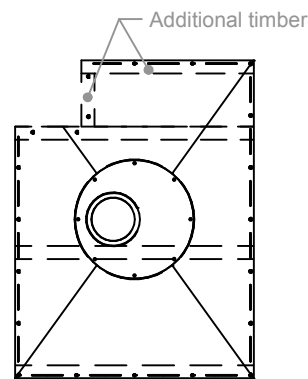


Fig.4
Cut to accommodate drain point.




Fig.5
Ensure cut edges are fixed.

Ensure all the cut edges are supported, then drill, countersink and screw the Pan to the joists below in around 7.87" intervals (avoiding pipes, electric wires, etc.).

Important: Do not cut the edges that adjoin surrounding floor. Cutting the Pan may reduce flow rate performance.

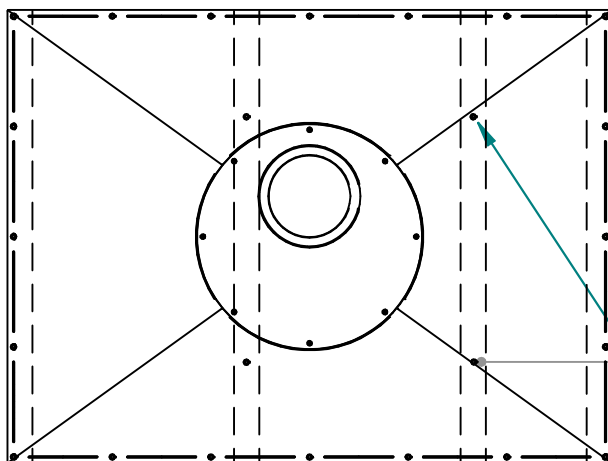


Fig.6
If Pan is not in contact with joist/concrete floor you must drill out and countersink the Pan to ensure it does. Failure to do this will allow unacceptable movement and may cause floor tiles to crack or become loose.

Additional fixing points