4.30





Front Load Washers

EIFLS60J RR/MB/IW

IQ-Touch™ Electronic Controls Featuring Perfect Steam™







Sure-2-Fit® Capacity Washer¹

EIFLS60J MB

Wash more in one load with 4.30 cu.ft. (D.O.E.) capacity washer.



Fastest Wash Time²

Fifteen minutes to wash.



Specialty Cycles

Clean all your special items including pet beds, stuffed animals, wool and more.



ExpertCare™ Wash System

State-of-the-art wash technology includes varied wash motion and bottom-vent steam option to deliver the best front load cleaning performance.



¹Based on manufacturer's specifications. Volume per I.E.C. Int'l Std. 60456, 4th ed. based on 4.30 cu. ft. D.O.E. measurement.

Capacity D.O.E. (Cu. Ft.)	4.30
Features	
Signature Soft-Arc Door Design	Yes
IQ-Touch™ Electronic Controls with LCD Display	Yes
Perfect Steam™ Wash System	Yes
Perfect Balance® System	Yes
Luxury-Quiet™ Sound System	Yes
Luxury-Design® Lighting	Yes
Touch-2-Open™/(Close) Door	Yes
_uxury-Glide® Touch-2-Open™/(Close) Dispenser Drawer	Yes
ExpertCare™ Wash System	Yes
ntegral Water Heater	Yes Yes
Stainless Steel Wash Drum Automatic Temperature Control	Yes
Automatic Water Level Adjustment	Yes
Auto Prewash Detergent Dispenser (Liquid/Powder)	Yes
Auto Bleach Dispenser (Liquid Only)	Yes
Auto Detergent Dispenser (Liquid/Powder)	Yes
Auto Fabric Softener Dispenser (Liquid Only)	Yes
Fumble Speed (RPM)	48-52 Variable
Spin Speed (RPM)	1,300
Reversible Door	Yes
Adjustable Leveling Legs	Yes
ENERGY STAR® Most Efficient®	Yes Sanitiza / Allarga
NSF® Certified	Sanitize/Allerger
Cycles	
Fast Wash," My Favorite (1), Deep Clean Sanitize," -leavy Duty," Whitest Whites," Colors, Normal," Casual," -Delicates, Allergen, Spin Only "Can be used with Add Steam option)	11
Specialty Cycles – Jeans, Fast Sanitize, Stuffed Animals, Pet Beds, Clean Washer, Active Wear, Fast Steam	7
Options	
Nash/Rinse Temperature Combinations	9
Temperature Selections	5
Add Steam	7
Spin Speed Selections	5
Soil Level Selections	5 22
Delay Start (Hours) End-of-Cycle Chime	Adjustable
	Aujustable
Installation Options	
Freestanding, Under Counter*, Stacked (Under Dryer), Pedestal, Hidden (In Closet), Second Floor	Yes
Accessories	
_uxury-Glide® Touch-2-Open"/(Close) Pedestal – Red Hot Red – PN# EPWD15RR, Mediterranean Blue – PN# EPWD15MB, Island White – PN# EPWD15IW	Optional
Oryer Stacking Kit – PN# STACKIT4X	Optional
Orain Hose Extension Kit – PN# 137098000	Optional
Mobile Home Installation Kit – PN# 137067200	Optional
Specifications	
Color –	
Red Hot Red	RR
Mediterranean Blue	MB
Island White	IW
Product Dimensions –	20"
Height (Without 15" Pedestal) (With 15" Pedestal)	38" 53"
Width	27"
Depth (to Center of Arc Not Including Hose) (with 90° Door Open)	31-1/2" 50-5/8"
Power Supply/ Nater Inlet Location	Top Right Rear/ Top Left Rear
/oltage Rating	120V/60Hz/15A
Connected Load (kW Rating) @ 120 Volts [‡]	1.4
Vatts @ 120 Volts	1,000
Amps @ 120 Volts	12
Shipping Weight (Approx.)	247 Lbs.
"Side-by-Side units in under-counter installation require custom-built cour FFor use on adequately wired 120V, dedicated circuit having 2-wire service ground wire. Appliance must be grounded for safe operation. NOTE: Always consult local and national electric & plumbing codes. Refer installation Guide for detailed installation instructions on the web at www.	e with a separate to Product

27" ELECTRIC FRONT LOAD WASHERS


Capacity D.O.E. (Cu.Ft.)

Specifications subject to change.

²Fastest time based on smallest load/Fast Wash and Fast Dry cycles selected for various load compositions.

³ Exceeds minimum ENERGY STAR® standard by at least 30%.



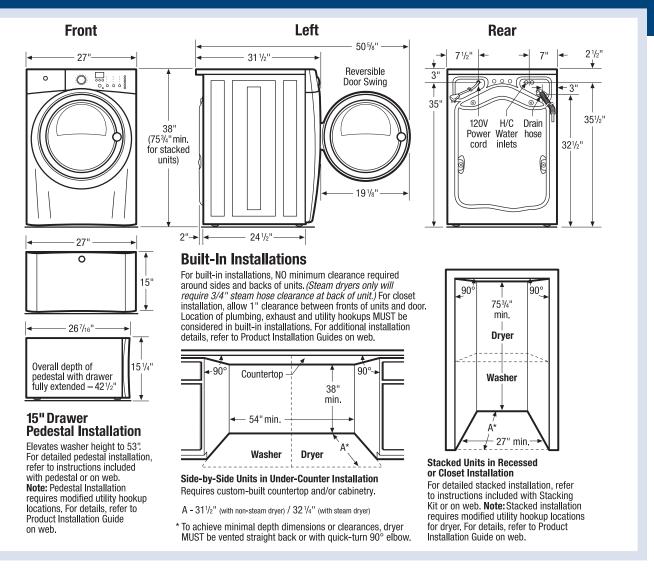

Front Load Washer Specifications

- Product Weight 237 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (ANSI/NFPA 70) and local codes & ordinances. (Do not use same circuit as dryer.)
- Voltage Rating –120V/60Hz/15 Amps
- Amps @ 120 Volts = 12 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.4kW
- Equipped with 120V 3-wire power supply cord, approx. 60" long.
- Always consult local and national electric & plumbing codes.
- To maximize detergent effectiveness, ambient temperature should never be below 60° F.
- Can be installed alone, with or without optional 15" drawer pedestal, or stacked beneath matching Electrolux Dryer, which requires installation of optional dryer stacking kit. (For installation details, refer to instructions included with optional pedestal or stacking kit or on web.)
- Can be built in with matching Electrolux Dryer in under-counter, recessed or closet installation. Installations requiring countertop and/or cabinetry will require custom building. (Refer to Built-In Installations on this page for cutout dimensions. For additional installation details, refer to Product Installation Guide on web.)
- Closet installation requires vented door with 2 unobstructed louvered openings, minimum 60 sq. in. each, located 3" from top and bottom of door. Full-length 120 sq. in. opening also acceptable. Allow 1" clearance between door and fronts of units.

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • electroluxappliances.com

- Do NOT install in area exposed to dripping water or outdoor weather conditions, or where gasoline or other flammables, including automobiles, are kept or stored.
- Floor MUST be solid with 1" maximum slope. To ensure vibration or movement does not occur, reinforcement of floor may be necessary. Do NOT install on carpeted surface.
- Leveling legs supplied to level washer properly and reduce excessive noise and vibration.
- H/C water faucets MUST be installed within 42" of washer's water inlet and MUST be 3/4" garden hose type, to connect to 48-1/2" inlet hoses.
- Water pressure MUST be between 30 and 120 psi with NOT more than 10 psi pressure difference between hot and cold.
- Drain required with standpipe diameter of 1-1/4" min, and height of 24" min./96" max. above floor, capable of eliminating 17 gallons per minute. Attached 59" drain hose can reach 79"-high standpipe.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.com for detailed instructions.

Optional Accessories

- Drawer Pedestals Red Hot Red (PN# EPWD15RR), Mediterranean Blue (PN# EPWD15MB), Island White (PN# EPWD15IW).
- Dryer Stacking Kit (PN# STACKIT4X).
- Drain Hose Extension Kit (PN# 137098000).
- Mobile Home Installation Kit (PN# 137067200).



Electrolux Major Appliances, N.A.