



# Drop-In Cooktops

FFEC3605L S/W/B

36" Electric



## Product Dimensions

Width	36"
Depth	21-1/2"
Height	3"

## More Easy-To-Use Features

### Color-Coordinated Control Knobs

White and Black cooktops come with matching knobs — while Stainless Steel models feature our neutral black knobs.

### "On" Indicator

Alerts you when your cooktop is on.

### Spill Saver™ Drip Bowls

Cooktop features chrome drip bowls that make cleaning up spills quick and easy.

A.D.A. Compliant<sup>1</sup>

## Available in:



Elements	Size	Watts
Right Front	8"	2,100
Right Rear	6"	1,250
Left Front	6"	1,250
Left Rear	8"	2,100

## Signature Features

### Ready-Select™ Controls

Select options or control cooking temperature with our easy-to-use controls.

### Durable Stainless Steel Cooktop<sup>1</sup>

A premium look that stands up to everyday use.

### Approved Over Frigidaire® Electric Wall Ovens

Cooktops are approved for installation above any of our Electric Single Wall Ovens.

### Spill Saver™ Cooktop

Cooktop contains your spillovers for easier cleanup.

<sup>1</sup>Select models only.


<sup>2</sup>When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

Features	
Controls	Ready-Select™
Surface Type	Brushed Chrome (S), Color-Coordinated Porcelain (W/B)
Right Front Element (Watts)	8" - 2,100
Right Rear Element (Watts)	6" - 1,250
Left Front Element (Watts)	6" - 1,250
Left Rear Element (Watts)	8" - 2,100
"On" Indicator	Yes
Control Location	Center Front
Knob Color	Black (S), Color-Coordinated (W/B)
Knob Type	Plastic
Bowl Type	Chrome
Certifications	
A.D.A. Compliant <sup>1</sup>	Yes
Specifications	
Power Supply Connection Location	Right Rear
Voltage Rating	240V/208V/60Hz
Connected Load (kW Rating) @ 240/208 Volts <sup>2</sup>	6.7/5.0
Amps @ 240/208 Volts	22.3/19.2
Minimum Circuit Required (Amps)	30
Approved for Electric Single Wall Oven Combination Installation <sup>3</sup>	Yes
Shipping Weight (Approx.)	30 Lbs.

<sup>1</sup>When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

<sup>2</sup>Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

<sup>3</sup>Cooktops are approved for installation above any of our Electric Single Wall Ovens.

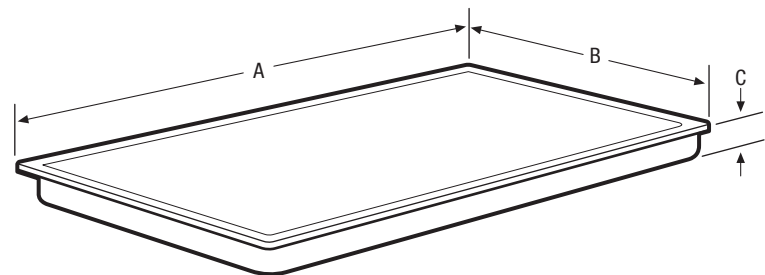

NOTE: Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).




Product Dimensions	
A - Width	36"
B - Depth	21-1/2"
C - Height	3"

Cutout Dimensions	
Width (Min.)	32-3/4"
Width (Max.)	34-1/4"
Depth (Min.)	19"
Depth (Max.)	20"
Height	5"

Granite Countertop  
Installation Kit available.

Accessories information available  
on the web at [frigidaire.com](http://frigidaire.com)

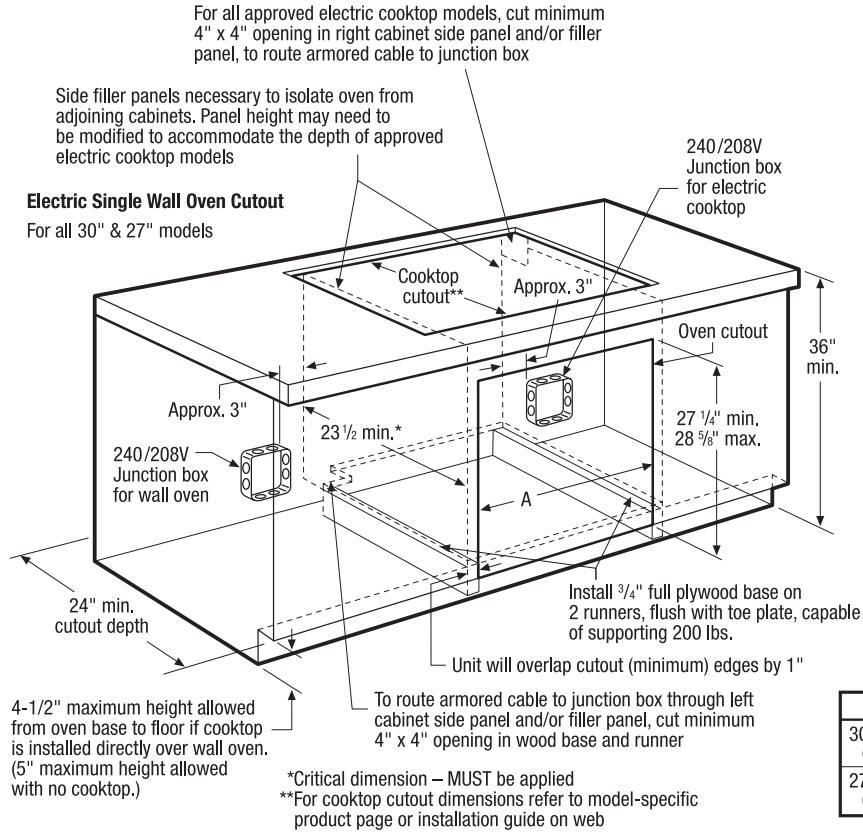

### 30"/27" Electric Single Wall Oven Under-Counter Installation Specifications

- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.
- For detailed electrical requirements, refer to model-specific product page and installation guide on web.
- Always consult local and national electric codes.
- Minimum 21" clearance for oven door depth when open.
- Minimum 23-1/2" deep cutout dimension is critical for proper installation, to ensure that oven's faceplate will fit flush against cabinet front.
- Full oven base of solid plywood or similar material required, capable of supporting 200 Lbs. Install over two runners and flush with toe plate.
- Base must be level and cabinet front must be square.
- Allow 5" maximum height from oven base to floor, if NO cooktop is installed directly over wall oven.

### Electric Cooktop Installation Over 30"/27" Electric Single Wall Oven Specifications

- All Frigidaire® Electric Single Wall Ovens are approved to be used beneath any approved Frigidaire® Electric Cooktop.
- For detailed Electric Cooktop installation, refer to model-specific product page and installation guide on web.
- Side filler panels necessary to isolate oven from adjoining cabinets. Panel height may need to be modified to accommodate the depth of approved electric cooktop models.
  - To route armored cable to junction box, cut minimum 4" x 4" opening in right cabinet side panel.
  - Allow 4-1/2" maximum height from oven base to floor, if cooktop is installed directly over wall oven.

**Note: For planning purposes only. Refer to Product Installation Guide on the web at [frigidaire.com](http://frigidaire.com) for detailed instructions.**