

List updated March 18, 2016.
For the most up-to-date list, visit
www.lutron.com/dimcflled

Dimmable CFL & LED bulbs

Compatible with Lutron 100W, 150W & 250W C-L® dimmers



Dimmable CFL & LED bulbs

Compatible with C·L[®] dimmers

List updated March 18, 2016.
For the most up-to-date list, visit
www.lutron.com/dimcflled

This list is designed to help you select bulbs that are compatible with Lutron C·L dimmers. The CFL and LED bulbs on this list were extensively tested by Lutron; the Lutron C·L dimmers were evaluated by UL and meet applicable safety standards.

How to use this list

If you already have a bulb:

Use the “Find” tool in your browser or PDF viewer to search for the model number that’s printed on the bulb. Then choose a C·L dimmer that’s compatible with that bulb.

If you already have a C·L dimmer:

Use the table of contents to find the corresponding pages for that control, and then select a bulb from that list.

What does “compatible” mean?

Compatible means that the bulbs can be dimmed, although the bulb’s dimming performance may not match what you’re used to seeing when dimming an incandescent or halogen bulb. These bulbs have also been electrically tested to confirm that the control may be used up to its full rated CFL/LED load without affecting the life of the control.

Products on this list are considered compatible with the respective Lutron C·L dimmers. Depending on the quality of the bulb you select, compatible bulbs may still:

- have less dimming range than an incandescent or halogen bulb
- dim less smoothly than an incandescent or halogen bulb
- flicker or shimmer at certain light levels
- buzz

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List updated March 18, 2016.
For the most up-to-date list, visit
www.lutron.com/dimcflled

For more information














If you'd like more information regarding bulb performance and test results, including dimming range, other dimmer options, and performance, please visit www.lutron.com/ledtool.

Warranty on your Lutron 100W C•L dimmer or 150W C•L dimmer or 250 W C•L dimmer will be void if used with bulbs that are not on this Lutron compatible bulb list.

Please note: Bulb variations in lamp design and construction affect performance. Bulb manufacturers can modify their bulbs at any time, without notice to Lutron. This prevents Lutron from ensuring ongoing compatibility. For up-to-date specifications, performance, and/or any related recall information about the bulb, please visit the bulb manufacturer's website.

This document provides information from manufacturers who are not Lutron agents or affiliates. The listing of a manufacturer or the existence of any external link to another website does not suggest that Lutron is endorsing the linked company, its products and/or its services. Purchasers should ask appropriate questions and request references before buying any products and/or entering a contract with any party. The information contained in this document is intended for illustrative and comparative purposes only, and is subject to change at any time. Lutron does not warrant that (a) the list of manufacturers is all-inclusive; (b) the information is complete, up-to-date, accurate and/or error-free; (c) the products and Lutron controls listed will always be compatible; and (d) that the information provided will be a viable or appropriate solution for your project needs. You are entirely responsible for and assume all risk for the use of the information.

Table of Contents

Maestro[®] occupancy sensor C•L dimmers		
• LED Bulbs.....	page 2-13	
• CFL Bulbs.....	page 14	
Maestro[®] C•L dimmers		
• LED Bulbs.....	page 15-24	
• CFL Bulbs.....	page 25	
Diva[®] 150W C•L dimmers*		
• LED Bulbs.....	page 26-36	
• CFL Bulbs.....	page 37	
<small>For the Diva 250W C•L dimmer (DVCL-253P-XX, DVSCCL-253P-YY), please click here</small>		
Skylark Contour[®] C•L dimmers*		
• LED Bulbs.....	page 26-36	
• CFL Bulbs.....	page 37	
Skylark[®] C•L dimmers		
• LED Bulbs.....	page 26-36	
• CFL Bulbs.....	page 37	
Lumea[®] C•L dimmers*		
• LED Bulbs.....	page 26-36	
• CFL Bulbs.....	page 37	
Toggler[®]/Ariadni[®] 150W C•L dimmers*		
• LED Bulbs.....	page 26-36	
• CFL Bulbs.....	page 37	
<small>For the Ariadni 250W C•L dimmer (AYCL-253P-XX), please click here</small>		
Credenza[®] C•L dimmers		
• LED Bulbs.....	page 38	
• CFL Bulbs.....	page 39	
Maestro Wireless[®] C•L dimmers		
• LED Bulbs.....	page 40-48	
• CFL Bulbs.....	page 49	
Caséta[®] Wireless C•L in-wall dimmers		
• LED Bulbs.....	page 50-57	
• CFL Bulbs.....	page 58	
Caséta[®] Wireless C•L plug-in dimmers		
• LED Bulbs.....	page 59-60	
• CFL Bulbs.....	page 61	
Caséta[®] Pro Wireless C•L dimmers		
• LED Bulbs.....	page 62-66	
• CFL Bulbs.....	page 67	
Diva[®] and Ariadni[®] 250W C•L dimmers		
• LED Bulbs.....	page 68-75	
• CFL Bulbs.....	page 76	

*** Please Note:**

If your Ariadni/Diva/Lumea/Skylark Contour/Toggler C•L dimmer has a dial on it to adjust the low-end trim (see page 77) and if you purchased your C•L dimmer before 2013 then please refer to the dimmer-bulb compatibility list available here:

[Archive C•L Bulb List](#)

† Requires a minimum of 2 lamps
 †† Requires a minimum of 3 lamps
 © Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
Commercial Electric	12W	CER6730Axx	Downlight, 670 Lumen, E26 retro fit kit	
	6W	BA19-04527OMB-12DE26-3_1	A19 4Flow, 83CRI, 2700K, 460 Lumen, E26	
	6W	BA19-04527OMF-12DE26-1U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base	
	6W	BA19-04527OMF-12DE26-2U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base	
	6W	BA19-04527OMF-12DE26-3U100	A19 4Flow, 2700K, 460 Lumen, E26	
	6W	BA19-04550OMB-12DE26-3_1	A19 4Flow, 83CRI, 5000K, 460 Lumen, E26	
	6W	BA19-04550OMF-12DE26-2U500	A19, 5000K, 450 Lumen, 40WE, 4pk	
	6W	BA19-04550OMF-12DE26-3U100	A19 4Flow, 5000K, 460 Lumen, E26	
	9.5W	BA19-08027OMF-12DE26-1U100	A19, Soft White, 2700K, 800 Lumen, Medium base	
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk	
	9.5W	BBR30-06527FLF-12DE26-1U100	BR30, 650 Lumen, Soft White, 2700K	
	9.5W	BBR30-06550FLF-12DE26-1U100	BR30, Daylight, 5000K 650 Lumen, 9.5W	
	9.5W	BBR40-07627FLF-12DE26-1U_00	BR40, 2700K, 760 Lumen, Flood	
	9.5W	BBR40-07650FLF-12DE26-1U10	BR40, 5000K, 760 Lumen, Flood	
	10W	BA19-08027OMB-12DE26-3_1	A19, 4Flow, 2700K, 815 Lumen, E26, 83 CRI	
	10W	BA19-08050OMB-12DE26-3_1	A19, 4Flow, 5000K, 815 Lumen, E26, 83 CRI	
	Cree	10.5W	BPAR30L-0853025C-12DE26-1C100	PAR30L, 3000K, 850 Lumen, 25° Spot
		10.5W	BPAR30L-0853040C-12DE26-1C100	PAR30L, 3000K, 850 Lumen, 40° Flood
		10.5W	BPAR30S-0853040C-12DE26-1C100	PAR30S, 3000K, 850 Lumen, 40° Flood
		11.5W	DRDL4-05727009-12DE26-1C100	4" Downlight, 2700K TW, 575 Lumen, E26 retrofit
12.5W		DRDL6-06227009-12DE26-1C100	6" Downlight, 2700K TW, 625 Lumen, E26 retrofit	
12.5W		DRDL6-06250009-12DE26-1C100	6" Downlight, 5000K TW, 625 Lumen, E26 retrofit	
15W		DRDL6-11027009-12DE26-1C100	6" Downlight, 2700K, 1100 Lumen	
16.5W		BPAR38-1503027T-12DE26-2U_00	PAR38, 3000K, 1510Lm, E26, Spot	
16.5W		BPAR38-1503047T-12DE26-2U_00	PAR38, 3000K, 1510Lm, E26, Flood	
18W		BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W	
18W		BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W	
18W		BPAR38-1503027T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 27 deg spot	
18W		BPAR38-1503047T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 47 deg flood	
EcoSmart		5W	5020001XXYY	Candle, 2700K, 350 Lumens
		5.5W	5bHPR500STW1D18	PAR20, 3000K 450Lm, E26
		5.5W	5bHPR500STW1D19	PAR20, 5000K 470Lm, E26
		6W	ECS GP19 WW 40WE 120†	A19, 3000K
		6.5W	50217013006	PAR20, 3000K, 450 Lumens
		7W	ECS BR20 50WE CW 120 G1 BL	BR20, Daylight, 5000K, 525 Lumen, E26
		7.5W	BPA15/CL/500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E26
	7.5W	BPA15C/CL500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E12	
	7.5W	BPCFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E12	
	7.5W	BPEFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E26	
	7.5W	BPGM/CL/500/LED/ESM	G16.5, Soft White, 2700K, 500 Lumen, E26	
	8W	ECS 20 CW FL 50WE 120†	PAR20, 5000K, 490 Lumen	
	8W	ECS 20 WW FL 50WE 120†	PAR20, 3000K, 450 Lumen	
	8W	ECS A19 CW 40WE 120†	A19, 5000K, 480 Lumen	
	8W	ECS A19 WW 40WE 120†	A19, 3000K, 450 Lumen	
	8W	ECS BR20 50WE CW 120 DG†	BR20, Daylight, 5000K, 600 Lumen, E26	
	8W	ECS BR20 50WE W27 120	BR20, Soft White, 2700K	
	8W	ECS BR20 50WE WW 120 DG†	BR20, Warm White, 3000K, 550 Lumen, E26	
	9W	5bSA800STQ1D02	A19, 3000K, 800Lm, E26, 4pk	
	9W	A810SS-Q1D-01 (5bSA800STQ1D01)	A19, 2700K, 800Lm, E26	
9W	A810SS-Q1D-04 (5bSA800STQ1D03)	A19, 5000K, 840Lm, E26, 4pk		
9.5W	5bHPR650STW1D29	PAR30, 3000K, 650Lm, E26		

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
EcoSmart	9.5W	5bHPR650STW1D30	PAR30, 3000K, 680Lm, E26
	9.5W	ECS DN4 CW E26 120	4" Downlight, Daylight, 5000K, 650 Lumen, E26, retrofit
	9.5W	ECS DN4 CW GU24 120	4" Downlight, Daylight, 5000K, 650 Lumen, GU24 base, retrofit
	9.5W	ECS DN4 W27 E26 120	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	9.5W	ECS DN4 W27 GU24 120	4" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit
	9.5W	ECS DN6 CW GU24 120	6" Downlight, Daylight, 5000K, 650 Lumen, GU24 base, retrofit
	9.5W	ECS DN6 W27 GU24 120	6" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit
	10W	DL-N14A10FR1-27	5/6" Downlight, 2700K, 650Lm, E26
	10W	DL-N14A10FR1-50	5/6" Downlight, 5000K, 650Lm, E26
	10W	DL-N14A10FR2-27	5/6" Downlight, 2700K, 650Lm, GU24
	10W	DL-N14A10FR2-50	5/6" Downlight, 5000K, 650Lm, GU24
	10W	ECS BR30 65WE CW 120 DG	BR30, Daylight, 5000K, 700 Lumen, E26
	10W	ECS BR30 65WE CW 120 DG 3PK	BR30, Daylight, 5000K, 700 Lumen, E26, 3pk
	10W	ECS BR30 65WE W27 120 DG	BR30, Soft White, 2700K, 650 Lumen, E26
	10W	ECS BR30 65WE W27 120 DG 3BX	BR30, Soft White, 2700K, 650 Lumen, E26, 3pk
	10W	ECS BR30 65WE WW 120 DG	BR30, Warm White, 3000K, 650 Lumen, E26
	10.5W	ECS 30 75WE WW GB FL 120	PAR30 Gimbal, 3000K, 750 Lumen, E26, 75WE
	10.5W	ECS 30 75WE xxx GB xx 120	PAR30 Gimbal, Various color temperatures, 75WE
	11W	5020901XXYY†	BR30, 2700K, 770 Lumens
	11W	ECS RFK6 65WE W27 120 REC†	Downlight, Soft White, 2700K, 600 Lumen, E26
	11.5W	ECS BR30 65WE CW 120†	BR30, 5000K, Medium Base
	11.5W	ECS BR30 65WE W27 120†	BR30, 2700K, 650 Lumen, Medium Base
	12W	ECS A19 CW 60WE 120†	A19, 5000K, 850 Lumen
	12W	ECS A19 WW 60WE 120†	A19, 3000K, 800 Lumen
	13W	5bHPR1000SW1D19	PAR38, 3000K, 900Lm, E26
	13W	5bHPR1000SW1D20	PAR38, 5000K, 1000Lm, E26
	13W	ECS 30 CW FL 75WE 120	PAR30, 5000K, 810 Lumen
	13W	ECS 30 WW FL 75WE 120	PAR30, 3000K, 750 Lumen
	14W	ECS BR40 90WE CW 120 DG	BR40, Daylight, 5000K, 1050 Lumen, E26
	14W	ECS BR40 90WE W27 120 DG	BR40, 2700K, 1000 Lumen, E26
15W	ECS 38 CW FL 90WE 120	PAR38, 5000K, 970 Lumen	
15W	ECS 38 WW FL 90WE 120	PAR38, 3000K, 900 Lumen	
Energetic	17.5W	ELY17D-2BRW-VB	BR40, 2700K, 1100 Lumen
	4.5W	R14DM/LED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	4.8W	CFCDM/300/LED††	Candle, 3000K, 310 Lumen, Candelabra Base
	4.8W	EFCDM/300/LED††	Candle, 3000K, 310 Lumen, Medium Base
	4.9W	BPCEFC/927/LED/3	Candle, 2700K, 330 Lumen, E12
	6.5W	BPMR16/GU10/DM/LED†	MR16, GU10 base
	6.5W	MR16/GU10/DM/LED†	MR16, GU10 base
	6.5W	R16DM/LED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	8W	A19/DM/GU24/LED	A19, 3000K, GU24 Base
	8W	A19/DM/LED	A19, 3000K
	8W	A19/DM/LED/CAN	A19
	8W	A19/DM/LED/RP/CAN	A19
	8W	A19DM/5K/LED	A19, 5000K
	8W	BPCEA19/DM/LED	A19
	8W	BPCEG25/927/LED/3	G25, 2700K, 495 Lumen, E26
8W	BPCER20/DM/LED	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)	
8W	R20/927/LED	R20, 2700K	
8W	R20/930/LED	R20, 3000K	
8W	R20/950/LED	R20, 5000K,	
8W	R20DM/LEDG2/CAN	R20, 2700K	
8.5W	BR30M65/LED/6	R30, 650 Lumen, E26	
9.5W	BPCER20/DM/LED	PAR20	
9.5W	PAR20/5K/LEDG5	PAR20, 5000K	
Feit			

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
Feit	9.5W	PAR20/5K/LEDG5/CAN	PAR20, 5000K	
	9.5W	PAR20/LEDG5	PAR20, 3000K, 450 Lumen	
	9.5W	PAR20/LEDG5/CAN	PAR20	
	9.7W	CELEDRT4/927	4" Downlight, 2700K, 520 Lumen, E26	
	9.7W	EDRT4/927	4" Downlight, 2700K, 520 Lumen, E26	
	9.7W	LEDR4/827	4" Downlight, 2700K, 520 Lumen, E26	
	9.7W	LEDR4/830	4" Downlight, 3000K, 520 Lumen, E26	
	9.7W	LEDR4/850	4" Downlight, 5000K, 520 Lumen, E26	
	9.7W	LEDRT4/927	4" Downlight, 2700K, 520 Lumen, E26	
	9.7W	LEDRT4/940	4" Downlight, 4000K, 520 Lumen, E26	
	10W	BPAG800/5K/LED	A19, 5000K	
	10W	BPAG800/LED	A19, 3000K, 800 Lumen	
	13W	BPCEBR30LED	BR30	
	13.5W	A19/OM800/5K/LED	A19, 5000K, Omni Directional	
	13.5W	A19/OM800/LED	A19, 3000K, Omni Directional	
	13.5W	BPCEA19/OM800/LED	A19, Omni Directional	
	13.5W	BPCEA19/OM800/LED/CAN	A19, Omni Directional	
	14W	LEDR56/830	Downlight, 3000K, 925 Lumen, retrofit kit	
	15W	BPCEPAR30/LEDG5	PAR30	
	15W	PAR30L/5K/LEDG5	PAR30, 5000K	
	15W	PAR30L/5K/LEDG5/CAN	PAR30, 5000K	
	15W	PAR30L/LEDG5	PAR30	
	15W	PAR30L/LEDG5/CAN	PAR30	
	16W	A19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional	
	16.8W	LEDR56/3K	5" or 6" Downlight, 3000K, 840 Lumen	
	17W	BPCEBR40/LED	BR40, 2700K, 1065 Lumen	
	17W	BR40/DM/LED†	BR40, 2700K, 1065 Lumen	
	18W	18PAR38/DM/LED	PAR38, 3000K	
	20W	20PAR38/LEDG5	PAR38	
	20W	BPCEPAR38/LEDG5	PAR38	
	20W	PAR38/5K/LEDG5	PAR38, 5000K	
	20W	PAR38/5K/LEDG5/CAN	PAR38, 5000K	
	20W	PAR38/LEDG5	PAR38	
	20W	PAR38/LEDG5/CAN	PAR38	
	21.5W	CELEDRT56/927/2	5/6" Downlight, 2700K, 1250 Lumen, E26	
	21.5W	LEDR56/827	5/6" Downlight, 2700K, 1250 Lumen, E26	
	21.5W	LEDR56/927/MP/4	5/6" Downlight, 2700K, 1250 Lumen, E26, 4 pack	
	21.5W	LEDR56HO/830	5/6" Downlight, 3000K, 1250 Lumen, E26	
	21.5W	LEDR56HO/850	5/6" Downlight, 5000K, 1250 Lumen, E26	
	22W	A/OM1600R/27K/LED	A21, 2700K, 1600 Lumen	
	22W	A/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen	
	22W	A/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen	
	GE	8W	LED8DA19/827	A19, 2700K, 450 Lumen, E26
		11W	LED11DA19RVL/TP	A19, 2700K, 570 Lumen
		11W	LED11DA19V2	A19, 2700K, 800 Lumen
12W		LED12DR30RVL/BK	BR30, Reveal	
12W		LED12DR30RVL/CDN	BR30, Reveal	
12W		LED12DR30RVL/TP	BR30, Reveal 2850K, 630 Lumen	
12W		LED12RS4RVLE26PB (95390)	Downlight, 2700K, 630 Lumen, E26	
12W		LED12RS4RVLGUPB (95391)	Downlight, 2700K, 630 Lumen, GU24	
12W		LED12RS6RVL326PB (95392)	Downlight, 2700K, 630 Lumen, E26	
12W		LED12RS6RVLGUPB (95393)	Downlight, 2700K, 630 Lumen, GU24	
18W		LED18D38W827/15	PAR38, 2700K, E26, 15° Beam	
18W		LED18D38W827/25	PAR38, 2700K, E26, 25° Beam	
18W		LED18D38W827/40	PAR38, 2700K, E26, 40° Beam	
18W		LED18D38W830/15	PAR38, 3000K, 1400 Lumen, E26, 15° Beam	
18W		LED18D38W830/25	PAR38, 3000K, 1400 Lumen, E26, 25° Beam	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
GE	18W	LED18D38W830/40	PAR38, 3000K, 1400 Lumen, E26, 40° Beam
	18W	LED18D38W927/15	PAR38, 2700K, 1100 Lumen, E26, 15° Beam
	18W	LED18D38W927/25	PAR38, 2700K, 1100 Lumen, E26, 25° Beam
	18W	LED18D38W927/40	PAR38, 2700K, 1100 Lumen, E26, 40° Beam
	18W	LED18D38W930/15	PAR38, 3000K, 1200 Lumen, E26, 15° Beam
	18W	LED18D38W930/25	PAR38, 3000K, 1200 Lumen, E26, 25° Beam
	18W	LED18D38W930/40	PAR38, 3000K, 1200 Lumen, E26, 40° Beam
Green Creative	18.5W	18.5PAR38G4DIM/927NF25	PAR38, 2700K, 1000 Lumen, E26
	18.5W	18.5PAR38G4DIM/927NF25/B	PAR38, 2700K, 1000 Lumen, E26
	18.5W	18.5PAR38G4DIM/927NF25/GU24	PAR38, 2700K, 1000 Lumen, GU24
	18.5W	18.5PAR38G4DIM/927SP15	PAR38, 2700K, 1000 Lumen, E26
	18.5W	18.5PAR38G4DIM/927SP15/B	PAR38, 2700K, 1000 Lumen, E26
	18.5W	18.5PAR38G4DIM/927SP15/GU24	PAR38, 2700K, 1000 Lumen, GU24
	18.5W	18.5PAR38G4DIM/930NF25	PAR38, 3000K, 1000 Lumen, E26
	18.5W	18.5PAR38G4DIM/930NF25/B	PAR38, 3000K, 1000 Lumen, E26
	18.5W	18.5PAR38G4DIM/930NF25/GU24	PAR38, 3000K, 1000 Lumen, GU24
	18.5W	18.5PAR38G4DIM/930SP15	PAR38, 3000K, 1000 Lumen, E26
	18.5W	18.5PAR38G4DIM/930SP15/B	PAR38, 3000K, 1000 Lumen, E26
	18.5W	18.5PAR38G4DIM/930SP15/GU24	PAR38, 3000K, 1000 Lumen, GU24
	18.5W	18.5PAR38G4DIM/940NF25	PAR38, 4000K, 1000 Lumen, E26
	18.5W	18.5PAR38G4DIM/940NF25/B	PAR38, 4000K, 1000 Lumen, E26
	18.5W	18.5PAR38G4DIM/940NF25/GU24	PAR38, 4000K, 1000 Lumen, GU24
	18.5W	18.5PAR38G4DIM/940SP15	PAR38, 4000K, 1000 Lumen, E26
	18.5W	18.5PAR38G4DIM/940SP15/B	PAR38, 4000K, 1000 Lumen, E26
18.5W	18.5PAR38G4DIM/940SP15/GU24	PAR38, 4000K, 1000 Lumen, GU24	
Halco	20W	PAR38FL20/827/LED	PAR38, 2700K, 1150 Lumen Flood
	20W	PAR38FL20/830/LED	PAR38, 3000K, 1200 Lumen Flood
	20W	PAR38FL20/840/LED	PAR38, 4000K, 1250 Lumen Flood
	20W	PAR38FL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
	20W	PAR38NFL20/827/LED	PAR38, 2700K, 1150 Lumen Flood
	20W	PAR38NFL20/830/LED	PAR38, 3000K, 1200 Lumen Flood
	20W	PAR38NFL20/840/LED	PAR38, 4000K Flood
	20W	PAR38NFL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
	20W	PAR38SP20/827/LED	PAR38, 2700K, 1150 Lumen Spot
	20W	PAR38SP20/830/LED	PAR38, 3000K, 1200 Lumen Spot
20W	PAR38SP20/840/LED	PAR38, 4000K Spot	
20W	PAR38SP20/850/LED	PAR38, 5000K, 1300 Lumen Spot	
Halo	14.8W	SLD612827WHUNVJB	6" Downlight, 2700K, 1100 Lumen, E26
	14.8W	SLD612830WHUNVJB	6" Downlight, 3000K, 1150 Lumen, E26
	14.8W	SLD612835WHUNVJB	6" Downlight, 3500K, 1200 Lumen, E26
	14.8W	SLD612840WHUNVJB	6" Downlight, 4000K, 1215 Lumen, E26
	14.8W	SLD612927WHUNVJB	6" Downlight, 2700K, 880 Lumen, E26
	14.8W	SLD612930WHUNVJB	6" Downlight, 3000K, 925 Lumen, E26
	14.8W	SLD612935WHUNVJB	6" Downlight, 3500K, 965 Lumen, E26
14.8W	SLD612940WHUNVJB	6" Downlight, 4000K, 1000 Lumen, E26	
Lighting Science	10.5W	LS 30 75WE xxx GB xx 120	PAR30, various color temperatures
	11.5W	DFN BR30 65WE CW 120 [†]	BR30, Cool White, 5000K, Medium base
	11.5W	DFN BR30 65WE NW 120 [†]	BR30, Neutral White, 4000K, Medium base
	11.5W	DFN BR30 65WE W27 120 [†]	BR30, Warm White, 2700K, Medium base
	11.5W	DFN BR30 65WE WW 120 [†]	BR30, Warm White, 3000K, Medium base
Litetronics	13W	LS GLP6 W27 120 WH S1 BX	6" Downlight, 2700K, E26 retrofit
	14W	LP14550FL2D	BR30, 2700K, 925 Lumen
	14W	LP14550FL4D	BR30, 3000K, 925 Lumen
NICOR	14W	LP14550FL6D	BR30, 4000K, 925 Lumen
	12W	DLR56-3008-120-2k-XX	Downlight, 2000K, 0806 Lumens, E26
	12W	DLR56-3008-120-4k-XX	Downlight, 4000K, 0806 Lumens, E26
12W	DLR56-3008-120-5k-XX	Downlight, 5000K, 0806 Lumens, E26	

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Osram	10W	73157-1	5/6" Downlight, 4100K, 700 Lumen, E26
	10W	73159-1	5/6" Downlight, 5000K, 700 Lumen, E26
	10W	73394 (LEDRT56700827FL80)	5/6" Downlight, 2700K, 700 Lumen, E26
	10W	73395-1	5/6" Downlight, 3000K, 700 Lumen, E26
	13W	73396 (LEDRT56900827FL80)	5/6" Downlight, 2700K, 900 Lumen, E26
Philips	3.5W	457226 (9290011668) [†]	Candle, 2700K, 180 Lumen, E12, Warm Glow
	3.5W	457234 (9290011668) [†]	Candle, 2700K, 180 Lumen, E12, Warm Glow
	3.5W	457242 (9290011668) [†]	Candle, 2700K, 180 Lumen, E12, Warm Glow
	4.5W	454371	PAR16, 3000K, 315 Lumens
	4.5W	9290002439	Candle, Warm White, 2700K, 320 Lumen, E26 base, Post Light
	4.5W	9290002797 ^{††}	Candle, 2700K, 330 Lumen, E26, blunt tip
	4.5W	9290002889 ^{††}	Candle, 2700K, 330 Lumen, E12, blunt tip
	4.5W	9290002890 ^{††}	A15, 2700K, 330 Lumen, E12
	4.5W	9290002891 ^{††}	A15, 2700K, 330 Lumen, E26
	4.5W	457119 (9290011673)	Candle, 330Lm, E26
	4.5W	457168 (9290011672)	G16.5, 330 Lm, E26
	4.5W	457184 (9290011670)	Candle, 330Lm, E12
	6W	9290002242	MR16, 3000K, 300 Lumen, GU10 base
	6W	9290002443	PAR16, 3000K, 300 Lumen, E26
	6W	456995 (9290011557) [†]	R20, 2700K, 450 Lumen, Warm Glow
	7W	9290002706	A19 SlimStyle, Daylight, 5000K, 450 Lumen, E26
	8W	9290002267	A19, 2700K, 470 Lumen
	8W	9290002295	A19, 5000K, 470 Lumen
	8W	9290002329	PAR20, 3000K, 470 Lumen, E26
	8W	9290002330	PAR20
	8W	9290002331	PAR20
	8W	9290002332	PAR20
	8W	9290002333	PAR20
	8W	9290002334	PAR20
	8W	9290002335	PAR20
	8.5W	9290002543	BR30, 5000K, 730 Lumen, 8.5W
	9.5W	9290011117	BR30, 2700K, 730 Lumen, WarmGlow to 2200K (Nov 2014 or later)
	9.5W	455840 (9290011345)	A19, Soft White, 2200-2700K, 800 Lumen, E26
	9.5W	9290011118 (452359)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452383)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452417)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452441)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452466)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452482)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	10W	458828 (9290011816)	A19, 2700K, 800 Lumen, 60WE, E26
	10W	459339 (9290011898)	G25, 2700K, 800 Lumen, E26
	10.5W	9290002544	BR30, 2700K, 730 Lumen
	10.5W	9290002707	A19 SlimStyle, Soft White, 2700K, 800 Lumen, 3pk
	11W	9290002268	A19, 2700K, 830 Lumen
	11W	9290002296	A19, 5000K, 830 Lumen
11W	9290011113	PAR30L, 3000K, ? Lumen, E26	
12W	9290002580 (431392)	BR40, 2700K, 800 Lumen	
13W	9290011120	A21 SlimStyle, 2700K, 1100 Lumen	
13W	9290002523 13PAR38/F25 3000 DIM AF RO	PAR38, 3000K, 950 Lumen	
14W	459065	A19, 2700K, 1100Lm, 75WE, E26	
14W	9290011839	A21, 2700K, 1100 Lumen, E26	
15W	9290002426	A21, 2700K, 1180 Lumen	
15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26	
15W	9290011111	PAR38, 3000K, 1050 Lumen, E26, Flood	
15W	9290011112	PAR38, 5000K, 1050 Lumen, E26, Flood	

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Philips	18W	9290011741	A21, 2700K, 1600Lumen, E26
	18W	459107 (9290011741)	A21, 2700K, 1600 Lumen, E26
	18W	459115 (9290011741)	A21, 2700K, 1600Lumen, E26
	18W	459123 (9290011741)	A21, 2700K, 1600Lumen, E26
	18W	459131 (9290011741)	A21, 2700K, 1600Lumen, E26
	19W	453340	A19, 2700K, 1620Lm, 100WE, E26
	19W	9290002473	PAR38, 3000K, 1250 Lumen
	19W	9290002577 (431395)	PAR38, 1300 Lumen, 25deg flood
	19W	9290002578 (431403)	PAR38, 1300 Lumen, 35deg flood
	19.5W	9290002251	PAR38, 3000K, 1210 Lumen
	19.5W	9290002252	PAR38, 2700K, 1183 Lumen
	19.5W	9290002253	PAR38, 3000K, 1212 Lumen
	19.5W	9290002291	PAR38, 4000K, 1207 Lumen
	19.5W	9290002312	PAR38, 2700K, 1100 Lumen
	19.5W	9290002313	PAR38, 2700K, 1196 Lumen
	19.5W	9290002314	PAR38, 3000K, 1200 Lumen
	19.5W	9290002315	PAR38, 3000K, 1225 Lumen
	19.5W	9290002316	PAR38, 4000K, 1200 Lumen
	19.5W	9290002317	PAR38, 4000K, 1245 Lumen
	19.5W	9290002321	PAR38, 2700K, 1172 Lumen
	19.5W	9290002322	PAR38, 5000K, 1300 Lumen
	22W	9290002290	A21, 2700K, 1780 Lumen, Medium base
Project Source	10W	DLS22-06B30D1E-WH-1	Downlight, 3000K, 650 Lumens, E26
Rayon	14.5W	RFL4-12W7L40K	DL, 4000k, 700 Lumen, E26
Satco	11W	S9084	PAR30, 3000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9085	PAR30, 4000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9086	PAR30, 3000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9087	PAR30, 4000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9088	PAR30, 3000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9089	PAR30, 4000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9090	PAR30, 3000K, 780 Lumen, E26, long neck, 40° Beam
	11W	S9091	PAR30, 4000K, 780 Lumen, E26, long neck, 40° Beam
	13W	S9410	PAR30S, 2700k, 950 Lumen, E26
	13W	S9415	PAR30S, 2700k, 950 Lumen, E26
	13W	S9439	PAR30S, 2700k, 950 Lumen, E26
	17W	S8977-S8979	PAR38
	17W	S8984-S8986	PAR38
	17W	S9092	PAR38, 3000K, 1200 Lumen, E26, 25° beam
	17W	S9093	PAR38, 4000K, 1200 Lumen, E26, 25° beam
	17W	S9094	PAR38, 3000K, 1200 Lumen, E26, 40° beam
	17W	S9095	PAR38, 4000K, 1200 Lumen, E26, 40° beam
	18W	S9455	PAR38, 3000K, 1400 Lumen, E26, Flood
18W	S9456	PAR38, 4000K, 1400 Lumen, E26, Flood	
Solais	7W	LRP20/25/27K	PAR20, 2700K, 475 Lumen, E26, 25° Beam
	7W	LRP20/25/30K	PAR20, 3000K, 500 Lumen, E26, 25° Beam
	7W	LRP20/40/27K	PAR20, 2700K, 475 Lumen, E26, 40° Beam
	7W	LRP20/40/30K	PAR20, 3000K, 500 Lumen, E26, 40° Beam
	11W	LR20/25/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, narrow flood
	11W	LR20/25/30K/750	PAR20, 3000K, 750 Lumen, E26, narrow flood
	11W	LR20/40/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, wide flood
	11W	LR20/40/30K/750/xx	PAR20, 3000K, 750 Lumen, E26, wide flood
	16W	LR30/10/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 10° Beam
	16W	LR30/10/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 10° Beam
	16W	LR30/10/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 10° Beam
	16W	LR30/15/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 15° Beam
	16W	LR30/15/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 15° Beam
	16W	LR30/15/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 15° Beam
	16W	LR30/25/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 25° Beam

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Solais	16W	LR30/25/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 25° Beam
	16W	LR30/25/30K/1200/WH	PAR30, 3000K, 1200 Lumen, E26, short neck, 25° Beam
	16W	LR30/40/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 40° Beam
	16W	LR30/40/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 40° Beam
	16W	LR30/40/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 40° Beam
	16W	LRP38/25/27K	PAR38, 2700K, 1025 Lumen, E26, 25° Beam
	16W	LRP38/25/30K	PAR38, 3000K, 1100 Lumen, E26, 25° Beam
	16W	LRP38/40/27K	PAR38, 2700K, 1025 Lumen, E26, 40° Beam
	16W	LRP38/40/30K	PAR38, 3000K, 1100 Lumen, E26, 40° Beam
	20W	LR38/25/30K/1450/SL	PAR38, 3000K, 1450 Lumen, E26, 15° Beam
	28W	LR38/15/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/15/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	28W	LR38/25/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/25/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	Switch	28W	LR38/40/27K/2000/xx
28W		LR38/40/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
10W		A260FUS27B1	A19, 800 Lumen
13W		75FU202	A19, 3000K, 1100 Lumen, E26
6W		79643	A19, Soft White, 2700K, 450 Lumen, E26, clear
6W		79242 (LED6A19DIMO827G5)	A19, 2700K, 450 Lumen, E26
6W		79243 (LED6A19DIMO827G5)	A19, 2700K, 450 Lumen, E26
6W		79243 (LED6A19DIMO827G5RP)	A19, 2700K, 450 Lumen, E26
6W		79245 (LED6A19DIMO850G5RP)	A19, 5000K, 450 Lumen, E26
6W		79271 (LED6A19DIMO827G5RP)	A19, 2700K, 450 Lumen, E26
6.5W		79162 (LED6.5A19/DIM/O/850/G5)	A19, 5000K, 450 Lumen, E26
6.5W		79163 (LED6.5A19/DIM/O/850/G5)	A19, 2700K, 450 Lumen, E26
7W		75169	G25, 475 Lumen, E26
7W		75170	G25, 475 Lumen, E26
7W		75180	G25, 475 Lumen, E26
7W	79120	PAR20, 2700K, 500 Lumen, E26	
Sylvania	7W	79653 (LED7R20DIMSE830G3RP [LW])	R20, 3000K, 525 Lumen, E26,
	7W	79659 (LED7R20/DIM/SE/830/G3)	R20, 3000K, 525 Lumen, E26,
	7W	LED7A19/DIM/O/SE/830 (78214)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
	7W	LED7A19/DIM/O/SE/830/RP (78213)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
	8W	70419-6	4" Downlight, 600 Lumen, retrofit kit
	8W	70459-3	4" Downlight, 600 Lumen, retrofit kit
	8W	70643-3	4" Downlight, 600 Lumen, retrofit kit
	8W	73193-1	4" Downlight, 600 Lumen, retrofit kit
	8W	LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26
	8W	LED8PAR16/DIM/930/FL36/P/LW	PAR16, Soft White, 390 Lumen
	8W	LED8PAR16/GU10/DIM/930/FL36/RP	PAR16, GU10, Soft White, 390 Lumen
	8W	LED8R20/DIM/SE/830/RP	R20, Soft White, 2700K to 2000K, 520 Lumen
	9W	79246 (LED9A19DIMO827G5)	A19, 2700K, 800 Lumen, E26
	9W	79247 (LED9A19DIMO827G5)	A19, 2700K, 800 Lumen, E26
	9W	79249 (LED9A19DIMO850RP)	A19, 5000K, 800 Lumen, E26
	9W	79273 (LED9A19DIMO850G5RP)	A19, 5000K, 800 Lumen, E26
	9W	79497 (LED9A19DIMO827G5CC)	A19, 2700K, 800 Lumen, E26
	9W	LED9BR30/DIM/HO/850/G4	BR30, 800 Lumen, E26
	9W	LED9BR30/DIM/HO/850/G4/RP	BR30, 800 Lumen, E26
	9W	LED9BR30/DIM/HO/850/G4/RP2	BR30, 800 Lumen, E26
9W	LED9BR30/DIM/HO/G4/RP	BR30, 800 Lumen, E26	
10W	71707-3	5/6" Downlight, 3000K, 700 Lumen, E26	
10W	73157-0	5/6" Downlight, 4100K, 700 Lumen, E26	
10W	73157-1	5/6" Downlight, 4100K, 700 Lumen, E26	
10W	73159-0	5/6" Downlight, 5000K, 700 Lumen, E26	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Sylvania	10W	73159-1	5/6" Downlight, 5000K, 700 Lumen, E26
	10W	73194-0	5/6" Downlight, 2700K, 700 Lumen, E26
	10W	73394 (LEDRT56700827FL80)	5/6" Downlight, 2700K, 700 Lumen, E26
	10W	73394-1	5/6" Downlight, 2700K, 700 Lumen, E26
	10W	73395-1	5/6" Downlight, 3000K, 700 Lumen, E26
	10W	73398-1	5/6" Downlight, 2700K, 700 Lumen, E26
	10W	LED/600/RT4/830/FL80/RP†	Recessed lighting kit, 3000K, 600 Lumen
	10W	LED/RT4/600/827/FL80†	Recessed lighting kit, 2700K, 600 Lumen
	10W	LED10A19/DIM/0/SE/830	A19, 3000K, 800 Lumen
	10W	LED10A19/DIM/0/SE/830/RP (78215)	A19, 3000K, 800 Lumen
	10.5W	LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE
	11W	73195-0	Downlight
	11W	73497-0	Downlight
	11W	79654 (LED11BR30DIMSE830G3RP[LW])	BR30, 3000K, 800 Lumen, E26
	11W	79657 (LED11BR30/DIM/SE/830/G3)	BR30, 3000K, 800 Lumen, E26
	11W	79660 (LED11BR30DIMSE830G3RP)	BR30, 3000K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3 (78413)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (78415)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (79121)	BR30, 2700K, 800 Lumen, E26
	12W	72578 (LEDRT56700927FL80CEC)	5/6" Downlight, 2700K, 900 Lumen, GU24
	12W	72579-0	5/6" Downlight, 3000K, 900 Lumen, GU24
	12W	72593-0	5/6" Downlight, 4000K, 900 Lumen, GU24
	12W	74059 (LED13PAR30LN/DIM/850/FL40/GL1/W/RP)	PAR30L, 5000K, 800 Lumen, E26,
	12W	74061 (LED13PAR30LN/DIM/830/FL40/GL1/W/RP)	PAR30L, 3000K, 800 Lumen, E26,
	12W	74062 (LED13PAR30LN/DIM/830/FL40/GL1/W/RP)	PAR30L, 3000K, 800 Lumen, E26,
	12W	78225 (LED13PAR30LN/DIM/850/NFL25/GL1/W)	PAR30L, 5000K, 800 Lumen, E26,
	12W	78226 (LED13PAR30LN/DIM/830/NFL25/GL1/W/RP)	PAR30L, 3000K, 800 Lumen, E26,

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Sylvania	12W	78227 (LED13PAR30LN/DIM/830/NFL25/GL1/W)	PAR30L, 3000K, 800 Lumen, E26,
	12W	78228 (LED13PAR30LN/DIM/830/FL40/GL1/W)	PAR30L, 3000K, 800 Lumen, E26,
	12W	78229 (LED13PAR30LN/DIM/827/NFL25/GL1/W)	PAR30L, 2700K, 800 Lumen, E26,
	12W	78230 (LED13PAR30LN/DIM/827/FL40/GL1/W)	PAR30L, 2700K, 800 Lumen, E26,
	12W	LED12BR30/DIM/HO/827	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/HO/827/HVP	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/SE/830/RP	BR30, Soft White, 2700K to 2000K, 850 Lumen
	13W	73397-1	5/6" Downlight, 3000K, 900 Lumen, E26
	13W	73422-1	5/6" Downlight, 3000K, 900 Lumen, E26
	13W	73675-0	4/5/6" Downlight, 3000K, 900 Lumens, E26
	13W	73676-0	4/5/6" Downlight, 3000K, 900 Lumens, E26
	13W	LEDLD900830FL120	4/5/6" Downlight, 3000K, 900 Lumens, E26
	14W	74031 (LED14PAR38DIM850FL40GL1WRP)	PAR38, 5000K, 1050 Lumen, E26
	14W	74032 (LED14PAR38DIM830NFL25GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74034 (LED14PAR38DIM830FL40GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74035 (LED14PAR38DIM830NFL25GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74036 (LED14PAR38DIM830WSP15GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74037(LED14PAR38DIM827FL40GL1W)	PAR38, 2700K, 1050 Lumen, E26
	14W	74065 (LED14PAR38DIM850FL40GL1WRP)	PAR38, 5000K, 1050 Lumen, E26
	14W	74066 (LED14PAR38DIM830FL40GL1WRP)	PAR38, 3000K, 1050 Lumen, E26
	14W	74067 (LED14PAR38DIM830FL40GL1WRP)	PAR38, 3000K, 1050 Lumen, E26
	15W	79655 (LED15BR40DIMSE830G3RP [LW])	BR40, 3000K, 1100 Lumen, E26
	15W	79661 (LED15BR40DIMSE830G3RP)	BR40, 3000K, 1100 Lumen, E26
	15W	LED15BR40/DIM/HO/827/G3/RP	BR40, Soft White, 2700K, 1100 Lumen, E26, Flood
	15W	LED15BR40/DIM/SE/830/G3	BR40, 3000K, 1100 Lumen, E26,
	16W	LED16BR40DIMHO827	BR40, 2700K, 1100Lumen
	17W	LED17PAR30LN/DIM/830/WSP15/P	PAR30, 3000K, 1200 Lumen, E26, spot
	17W	LED17PAR30LN/DIM/830/WSP20	PAR30, 3000K, 1200 Lumen, E26, wide spot
	20W	LED20PAR38/DIM/930/FL40/P2	PAR38, 3000K, 1000 Lumen,
	20W	LED20PAR38DIM830FL40	PAR38, 3000K, 1300 Lumen

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Sylvania	21W	LED21/PAR38/DIM/P/930/FL30/HVP	PAR38, Warm White, 3000K, 1100 Lumen, E26, 21W
TCP	12W	LED12P30D27KNFL	PAR30, 2700K, 800 Lumen, E26
	17W	LED17BR40D27K (LED17BR40D)	BR40, 2700K, 1200 Lumen, E26
	17W	LED17HOP38D27KNFL (LED17P38D1)	PAR38, 2700K, 1550 Lumen, E26, Narrow Flood
	17W	LED17P38D24KNFL	PAR38, 2400K, 1105 Lumen, E26
Toshiba	13W	LDRB1327WE6USD2 (13BR40/27K-T)	BR40, 2700K, 950 Lumen
	13W	LDRB1340WE6USD2 (13BR40/40L-T)	BR40, 4000K, 1050 Lumen
Utilitech	3W	LG161/2DM/IF/LED [†]	G16.5, Warm White, 3000K, 200 Lumen, E12 base, frosted
	4.5W	LR14DMLED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	4.8W	LA15DM/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, clear
	4.8W	LA15DM/IF/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, frosted
	4.8W	LA15DMC/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LCFFDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E12 base, frosted flame tip
	4.8W	LEFCDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E26 base, clear flame tip
	4.8W	LG161/2DM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LG161/2DM/IF/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, frosted
	4.8W	LGMDM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E26, clear
	5.5W	LMR16GU10DMLEDG2	MR16, 2700K, 350 Lumen, GU10, Flood
	6.5W	LMR16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	LMR16DMGU10 [†]	MR16, GU10 base
	6.5W	LR16DMLED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	LA19DM/GU24/LED	A19, 3000K, GU24
	7.5W	LA19DM/LED	A19, 3000K, 450 Lumen, E26
	7.5W	R20/DM/5K/LED	R20, 450 Lumen, E26
	8W	BPCER20/927/LED	R20, 450 Lumen, E26
	8W	LA19DM/5K/LED	A19, 5000K
	8W	LCFCDM500LED [†]	Candle, 3000K, 500 Lumen, E12 candle base
	8W	LG25DM/LEDG2	G25, Warm White, 3000K, 510 Lumen, E26
	8W	LR20DMLEDG2	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	8W	R20/927/LED	R20, 450 Lumen, E26
	8W	R20/DM/LEDG2	R20, 450 Lumen, E26
	8W	R20DM/LEDG2/CAN	R20, 450 Lumen, E26
	8.5W	LMR16DMGU10/500/LED	MR16, Warm White, 3000K, 520 Lumen, GU10, 120V
	8.5W	LPAR20LEDG72	PAR20, 500 Lumen, 2PK
	9W	LR20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9W	R20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9.5W	AGOM800/5K/LED/CAN	A19, 810 Lumen, E26
	9.5W	AGOM800/927/LED	A19, 810 Lumen, E26
	9.5W	AGOM800/927/LED/CAN	A19, 810 Lumen, E26
	9.5W	AGOM800/LED/3/CAN	A19, 800 Lumen, E26
	9.5W	AGOM800/LED/CAN	A19, 800 Lumen, E26
	9.5W	BPAGOM800/5K/LED	A19, 810 Lumen, E26
	9.5W	BPAGOM800/LED	A19, 800 Lumen, E26
	9.5W	BPAGOM800/LED/TAR	A19, 800 Lumen, E26
	9.5W	BPAGOM800/LED/TV	A19, 800 Lumen, E26
	9.5W	BPCEAG800/927/LED/3	A19, 810 Lumen, E26
	9.5W	LPAR20/5K/LEDG5	PAR20, 5000K, 500 Lumen
	9.5W	LPAR20/LEDG5	PAR20, 3000K, 450 Lumen
	9.5W	LPAR20DM/SP/LED	PAR20, 3000K, 465 Lumen, Spot
9.8W	LA19DM/800/LED/G2	A19, 3000K, 800 Lumen	
10W	LA19DM/800/5K/LEDG2	A19, 5000K	

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
	10W	LA19DM/800/LEDG2	A19, 3000K, 800 Lumen
	11W	DLS02-04A27D1E-WH-F1	4" Downlight, 2700K, 600 Lumen, E26 retrofit
	11W	DLS02-04A27D1E-WH-F2	4" Downlight, 2700K, 600 Lumen, E26 retrofit 2pk
	11W	DLS02-41127D1E-WF1	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	12W	LPAR30L/LEDG7/2	PAR30L, 3000K, 800 Lumen, E26, long neck, 2PK
	13W	BPCEBR30/927/LED	BR30, 750 Lumen, E26
	13W	BR30/927/LED	BR30, 750 Lumen, E26
	13W	BR30/927/LED/CAN	BR30, 750 Lumen, E26
	13W	BR30/DM/LEDG2	BR30, 750 Lumen, E26
	13W	BR30DM/LED/CAN	BR30, 750 Lumen, E26
	13W	DLS02-61327D1E-WF1	5" or 6" Downlight, Soft White, 2700K, 800 Lumen, E26 retrofit
	13W	DLS02-61350D1E-WF1	5" or 6" Downlight, Daylight, 5000K, 800 Lumen, E26 retrofit
	13W	DLS03-06E30D1E-WH-F1	Downlight 3000K 700 Lumens 65WE
	13W	LBR30DM/LEDG2	BR30
	13.5W	LA19/OM800/LED	A19, 3000K, 800 Lumen, Omni Directional
	15W	15PAR30L/LEDG5	PAR30, 3000K, 790 Lumen, E26
	15W	BPCEPAR30/930/LED	PAR30, 3000K, 770 Lumen, E26
	15W	LBR30HO/LED/G2	BR30, Soft White, 1150 Lumen
	15W	LPAR30L/5K/LEDG5	PAR30, 5000K, 800 Lumen, long neck flood
	15W	LPAR30L/LEDG5	PAR30, 3000K, 790 Lumen, long neck flood
	15W	LPAR30LDM/SP/LED	PAR30, 3000K, 790 Lumen, long neck, spot
	15W	LPAR30S/LEDG5	PAR30, 3000K, 750 Lumen, short neck flood
	15W	PAR30/S/5K/LEDG5	PAR30, 3000K, 750 Lumen, E26
	15W	PAR30/S/LEDG5	PAR30, 3000K, 750 Lumen, E26
	15W	PAR30L/5K/LEDG5	PAR30, 3000K, 800 Lumen, E26
	15W	PAR30L/930/LED	PAR30, 3000K, 770 Lumen, E26
	15W	PAR30L/LEDG5	PAR30, 3000K, 800 Lumen, E26
	15.5W	BPCEAG1600/827/LED	A19, 1600 Lumen, E26
Utilitech	16W	AGOM1600/5K/LED/CAN	A19, 1600 Lumen, E26
	16W	AGOM1600/LED/CAN	A19, 1600 Lumen, E26
	16W	BPAGOM1600/5K/LED	A19, 1600 Lumen, E26
	16W	BPAGOM1600/LED	A19, 1600 Lumen, E26
	16W	BPAGOM1600/LED/TAR	A19, 1600 Lumen, E26
	16W	LA19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional
	16W	LBR40DM/LEDG2	BR40, 1065 Lumen, E26
	16W	LBR40DMLEDG2	BR40, 2700K, 1065 Lumen
	16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK
	16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK
	16.5W	PAR38/5K/LEDG5	PAR30, 3000K, 1000 Lumen, E26
	17W	BPCEBR40/DM/LED†	BR40
	17W	LBR40DM/LED†	BR40, 2700K, 1065 Lumen
	17.5W	YGA08A35-17.5W-827	BR40, 2700K, 1100 Lumen
	18W	BPCEPAR38/930/LED	PAR30, 3000K, 950 Lumen, E26
	18W	PAR38/930/LED	PAR30, 3000K, 950 Lumen, E26
	20W	20PAR38/LEDG5	PAR30, 3000K, 1035 Lumen, E26
	20W	DLS24-06C27D1E-WH-F1	5 or 6" Downlight 2700K 1200 Lumens 90WE
	20W	L20PAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood
	20W	LBR40HO/LED/G2	BR40, Soft White, 1400 Lumen
	20W	LPAR38/5K/LEDG5	PAR38, 5000K, 1000 Lumen, flood
	20W	LPAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood
	20W	LPAR38DM/SP/LED	PAR38, 3000K, 1000 Lumen, Spot
	20W	PAR38/LEDG5	PAR30, 3000K, 950 Lumen, E26
	20.5W	LPAR381400LEDG72	PAR38, 1450 Lumen, 2PK
	22W	LA/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen
	22W	LA/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen
	23W	LPAR38/1400/5K/LEDG5	PAR38, 5000K, 1400 Lumen
	23W	LPAR38/1400/LEDG5	PAR38, 3000K, 1400 Lumen

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
 For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Westinghouse	6.5W	03425	A19, 2700K, 450 Lumen, E26, 40WE
	9W	03563	BR30, 2700K, 750 Lumen, E26
	10W	03439	A19, 3000K, 800 Lumen, E26, 60WE
	10W	03696	A19, 2700K, 790 Lumen, E26, 60WE
	17W	33014	PAR38, 3000K, 1200 Lumen, flood
	17W	33064	PAR38, 3000K, 1200 Lumen, flood

† Requires a minimum of 2 lamps
 †† Requires a minimum of 3 lamps
 © Lutron Electronics Co., Inc. | PN 368-3266K



CFL bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
EcoSmart	5W	8TC05 ^{††}	Candle, (ES5CCDF052, ES9CCDF052)
	5W	8TC05F ^{††}	Candle, Torpedo Tip, 2700K, 200 Lumen
	5W	8TFC05F ^{††}	Candle, Flame Tip, 2700K, 200 Lumen
	11W	BPESL11R20/DM/ESM	R20, Soft White
	14W	40114 [†]	Spiral, Soft White (ES5M814DIM2, ES9M814DIM2)
	14W	2R2014DIM	R20, 2700K, 410 Lumen
	15W	2R3015DIM	R30 Flood, Soft White (ES5R315DIM2)
	15W	2R3015DIM35K	R30 Flood, Bright White (ES5R315DIM35K)
Feit	11W	BPESL11R20/DM	R20
	23W	BPESL23R40/DIM	R40
GE	26W	FLE26/2/DVR/40	R40
	26W	FLE26HT3/2/DV/SW	Spiral
Philips	20W	EL/A R40 Dim 20W	R40
Sylvania	5W	CF5EL/B10/827/L/DIM [†]	Candle
	5W	CF5EL/DEC/DIM [†]	Candle
	14W	CF14EL/TWIST/DIM	Spiral
	24W	CF24EL/TWIST/DIM	Spiral
TCP	5W	8TC05F ^{††}	Candle
	5W	8TFC05F ^{††}	Candle, flame tip
	14W	40114 [†]	Spiral
	14W	2R2014DIM	R20, 2700K, 410 Lumen
	15W	2R3015DIM	R30, Soft White, 2700K
	16W	4R3016TD	R30, TruDim, 2700K
	16W	4R3016TD30K	R30, TruDim, 3000K
	16W	4R3016TD35K	R30, TruDim, 3500K
	16W	4R3016TD41K	R30, TruDim, 4100K
	16W	4R3016TD50K	R30, TruDim, 5000K
Utilitech	11W	LBP11R20DM	R20, Soft White, 2700K
	15W	LBP15TDM	Spiral
	23W	LBP23R40DM	R40
	23W	LBP23TDM	Spiral

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Cree	6W	BA19-04527OMB-12DE26-3_1	A19 4Flow, 83CRI, 2700K, 460 Lumen, E26
	6W	BA19-04527OMF-12DE26-1U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04527OMF-12DE26-2U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04527OMF-12DE26-3U100	A19 4Flow, 2700K, 460 Lumen, E26
	6W	BA19-04550OMB-12DE26-3_1	A19 4Flow, 83CRI, 5000K, 460 Lumen, E26
	6W	BA19-04550OMF-12DE26-2U500	A19, 5000K, 450 Lumen, 40WE, 4pk
	6W	BA19-04550OMF-12DE26-3U100	A19 4Flow, 5000K, 460 Lumen, E26
	9.5W	BA19-08027OMF-12DE26-2U100	A19, Soft White, 2700K, 800 Lumen, Medium base
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk
	9.5W	BBR30-06527FLF-12DE26-1U100	BR30, 650 Lumen, Soft White, 2700K
	9.5W	BBR30-06550FLF-12DE26-1U100	BR30, Daylight, 5000K 650 Lumen, 9.5W
	9.5W	BBR40-07627FLF-12DE26-1U_00	BR40, 2700K, 760 Lumen, Flood
	9.5W	BBR40-07650FLF-12DE26-1U10	BR40, 5000K, 760 Lumen, Flood
	10W	BA19-08027OMB-12DE26-3_1	A19, 4Flow, 2700K, 815 Lumen, E26, 83 CRI
	10W	BA19-08050OMB-12DE26-3_1	A19, 4Flow, 5000K, 815 Lumen, E26, 83 CRI
	10.5W	BPAR30S-0853040C-12DE26-1C100	PAR30S, 3000K, 850 Lumen, 40° Flood
	11.5W	DRDL4-05727009-12DE26-1C100	4" Downlight, 2700K TW, 575 Lumen, E26 retrofit
	12.5W	DRDL6-06227009-12DE26-1C100	6" Downlight, 2700K TW, 625 Lumen, E26 retrofit
	12.5W	DRDL6-06250009-12DE26-1C100	6" Downlight, 5000K TW, 625 Lumen, E26 retrofit
	15W	DRDL6-11027009-12DE26-1C100	6" Downlight, 2700K, 1100 Lumen
16.5W	BPAR38-1503027T-12DE26-2U_00	PAR38, 3000K, 1510Lm, E26, Spot	
16.5W	BPAR38-1503047T-12DE26-2U_00	PAR38, 3000K, 1510Lm, E26, Flood	
18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W	
18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W	
Duracell	6W	LED110342B	A19, 450 Lumen, E26, 40WE
	6W	LED11340B	A19, 3000K, 450 Lumen, E26, 40WE
	6W	LED11341B	A19, 450 Lumen, E26, 40WE
EcoSmart	5W	5020001XXYY	Candle, 2700K, 350 Lumens
	5.5W	5bHPR500STW1D18	PAR20, 3000K 450Lm, E26
	5.5W	5bHPR500STW1D19	PAR20, 5000K 470Lm, E26
	6W	ECS 25 40WE W27 120 DG	G25, 2700K, 400 Lumen, E12
	6W	ECS GP19 WW 40WE 120†	A19, 3000K
	6.5W	50217013006	PAR20, 3000K, 450 Lumens
	7W	ECS 25 60WE W27 120 DG	G25, 2700K, E12
	7W	ECS BR20 50WE CW 120 G1 BL	BR20, Daylight, 5000K, 525 Lumen, E26
	7.5W	BPA15/CL/500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E26
	7.5W	BPA15C/CL500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E12
	7.5W	BPCFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E12
	7.5W	BPEFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E26
	7.5W	BPGM/CL/500/LED/ESM	G16.5, Soft White, 2700K, 500 Lumen, E26
	8W	ECS 20 50WE CW FL 120 TP	PAR20, Daylight, 5000K, 575 Lumen, E26
	8W	ECS 20 50WE WW FL 120 TP	PAR20, Bright White, 3000K, 500 Lumen, E26
	8W	ECS 20 CW FL 50WE 120	PAR20, 5000K, 490 Lumen
	8W	ECS 20 WW FL 50WE 120	PAR20, 3000K, 450 Lumen
	8W	ECS BR20 50WE CW 120 DG	BR20, Daylight, 5000K, 600 Lumen, E26
	8W	ECS BR20 50WE W27 120	BR20, Soft White, 2700K
	8W	ECS BR20 50WE WW 120 DG	BR20, Warm White, 3000K, 550 Lumen, E26
9W	5bSA800STQ1D02	A19, 3000K, 800Lm, E26, 4pk	
9W	A810SS-Q1D-01 (5bSA800STQ1D01)	A19, 2700K, 800Lm, E26	
9W	A810SS-Q1D-04 (5bSA800STQ1D03)	A19, 5000K, 840Lm, E26, 4pk	
9.5W	5bHPR650STW1D29	PAR30, 3000K, 650Lm, E26	
9.5W	5bHPR650STW1D30	PAR30, 3000K, 680Lm, E26	
9.5W	ECS DN4 CW E26 120	4" Downlight, Daylight, 5000K, 650 Lumen, E26, retrofit	
9.5W	ECS DN4 CW GU24 120	4" Downlight, Daylight, 5000K, 650 Lumen, Gu24 base, retrofit	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
EcoSmart	9.5W	ECS DN4 W27 E26 120	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
	9.5W	ECS DN4 W27 GU24 120	4" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit	
	9.5W	ECS DN6 CW GU24 120	6" Downlight, Daylight, 5000K, 650 Lumen, Gu24 base, retrofit	
	9.5W	ECS DN6 W27 E26 120	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
	9.5W	ECS DN6 W27 E26 120 2BX	6" Downlight, Soft White, 2700K, E26 retrofit, 2pk	
	9.5W	ECS DN6 W27 E26 120 BX V3	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
	9.5W	ECS DN6 W27 GU24 120	6" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit	
	10W	DL-N14A10FR1-27	5/6" Downlight, 2700K, 650Lm, E26	
	10W	DL-N14A10FR1-50	5/6" Downlight, 5000K, 650Lm, E26	
	10W	DL-N14A10FR2-27	5/6" Downlight, 2700K, 650Lm, GU24	
	10W	DL-N14A10FR2-50	5/6" Downlight, 5000K, 650Lm, GU24	
	10W	ECS BR30 65WE CW 120 DG†	BR30, Daylight, 5000K, 700 Lumen, E26	
	10W	ECS BR30 65WE CW 120 DG 3PK†	BR30, Daylight, 5000K, 700 Lumen, E26, 3pk	
	10W	ECS BR30 65WE W27 120 DG†	BR30, Soft White, 2700K, 650 Lumen, E26	
	10W	ECS BR30 65WE W27 120 DG 3BX†	BR30, Soft White, 2700K, 650 Lumen, E26, 3pk	
	10W	ECS BR30 65WE WW 120 DG†	BR30, Warm White, 3000K, 650 Lumen, E26	
	10.5W	ECS 30 75WE WW GB FL 120	PAR30 Gimbal, 3000K, 750 Lumen, E26, 75WE	
	10.5W	ECS 30 75WE xxx GB xx 120	PAR30 Gimbal, Various color temperatures, 75WE	
	11W	5020901XXYY†	BR30, 2700K, 770 Lumens	
	11.5W	ECS BR30 65WE CW 120†	BR30, 5000K, Medium Base	
	11.5W	ECS BR30 65WE W27 120†	BR30, 2700K, 650 Lumen, Medium Base	
	12W	ECS A19 CW 60WE 120	A19, 5000K, 850 Lumen	
	12W	ECS A19 WW 60WE 120	A19, 3000K, 800 Lumen	
	13W	5bHPR1000SW1D19	PAR38, 3000K, 900Lm, E26	
	13W	5bHPR1000SW1D20	PAR38, 5000K, 1000Lm, E26	
	13W	ECS 30 CW FL 75WE 120	PAR30, 5000K, 810 Lumen	
	13W	ECS 30 WW FL 75WE 120	PAR30, 3000K, 750 Lumen	
	14W	ECS BR40 90WE CW 120 DG	BR40, Daylight, 5000K, 1050 Lumen, E26	
	14W	ECS BR40 90WE W27 120 DG	BR40, 2700K, 1000 Lumen, E26	
	15W	ECS 38 CW FL 90WE 120	PAR38, 5000K, 970 Lumen	
	15W	ECS 38 WW FL 90WE 120	PAR38, 3000K, 900 Lumen	
	15W	ECS BR40 90WE W27 120	BR40, Soft White, 2700K	
	Feit	4.5W	R14DM/LED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
		4.8W	CFCDM/300/LED†	Candle, 3000K, 310 Lumen, Candelabra Base
		4.8W	EFCDM/300/LED†	Candle, 3000K, 310 Lumen, Medium Base
4.9W		BPCEFC/927/LED/3	Candle, 2700K, 330 Lumen, E12	
6.5W		BPMP16/GU10/DM/LED	MR16, GU10 base	
6.5W		MR16/GU10/DM/LED	MR16, GU10 base	
6.5W		R16DM/LED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE	
8W		A19/DM/GU24/LED	A19, 3000K, GU24 Base	
8W		A19/DM/LED	A19, 3000K	
8W		A19/DM/LED/CAN	A19	
8W		A19/DM/LED/RP/CAN	A19	
8W		A19DM/5K/LED	A19, 5000K	
8W		BPCEA19/DM/LED	A19	
8W		BPCEG25/927/LED/3	G25, 2700K, 495 Lumen, E26	
8W		BPCER20/DM/LED†	R20 (90mA ridged reflector version)	
8W		R20/DM/LED†	R20, 2700K, 450 Lumen (90mA ridged reflector version)	
8W		R20DM/LED/CAN†	R20 (90mA ridged reflector version)	
8.5W		BR30M65/LED/6	R30, 650 Lumen, E26	
9.5W		BPCER20/DM/LED	PAR20	
9.5W		PAR20/5K/LEDG5	PAR20, 5000K	
9.5W		PAR20/5K/LEDG5/CAN	PAR20, 5000K	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
	9.5W	PAR20/LEDG5	PAR20, 3000K, 450 Lumen
	9.5W	PAR20/LEDG5/CAN	PAR20
	9.7W	CELEDRT4/927	4" Downlight, 2700K, 520 Lumen, E26
	9.7W	EDRT4/927	4" Downlight, 2700K, 520 Lumen, E26
	9.7W	LEDR4/827	4" Downlight, 2700K, 520 Lumen, E26
	9.7W	LEDR4/830	4" Downlight, 3000K, 520 Lumen, E26
	9.7W	LEDR4/850	4" Downlight, 5000K, 520 Lumen, E26
	9.7W	LEDRT4/927	4" Downlight, 2700K, 520 Lumen, E26
	9.7W	LEDRT4/940	4" Downlight, 4000K, 520 Lumen, E26
	10W	BPAG800/5K/LED	A19, 5000K
	10W	BPAG800/LED	A19, 3000K, 800 Lumen
	13W	BPCEBR30LED	BR30
	13.5W	A19/OM800/5K/LED	A19, 5000K, Omni Directional
	13.5W	A19/OM800/LED	A19, 3000K, Omni Directional
	13.5W	BPCEA19/OM800/LED	A19, Omni Directional
	13.5W	BPCEA19/OM800/LED/CAN	A19, Omni Directional
	14W	LEDR56/830	Downlight, 3000K, 925 Lumen, retrofit kit
	15W	BPCEPAR30/LEDG5	PAR30
	15W	PAR30L/5K/LEDG5	PAR30, 5000K
	15W	PAR30L/5K/LEDG5/CAN	PAR30, 5000K
	15W	PAR30L/LEDG5	PAR30
	15W	PAR30L/LEDG5/CAN	PAR30
	16W	A19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional
	16.8W	LEDR56/3K	5" or 6" Downlight, 3000K, 840 Lumen
	17W	BPCEBR40/LED	BR40, 2700K, 1065 Lumen
	17W	BR40/DM/LED†	BR40, 2700K, 1065 Lumen
	18W	18PAR38/DM/LED	PAR38, 3000K
	20W	20PAR38/LEDG5	PAR38
	20W	BPCEPAR38/LEDG5	PAR38
	20W	PAR38/5K/LEDG5	PAR38, 5000K
	20W	PAR38/5K/LEDG5/CAN	PAR38, 5000K
	20W	PAR38/LEDG5	PAR38
	20W	PAR38/LEDG5/CAN	PAR38
	21.5W	CELEDRT56/927/2	5/6" Downlight, 2700K, 1250 Lumen, E26
	21.5W	LEDR56/827	5/6" Downlight, 2700K, 1250 Lumen, E26
	21.5W	LEDR56/927/MP/4	5/6" Downlight, 2700K, 1250 Lumen, E26, 4 pack
	21.5W	LEDR56HO/830	5/6" Downlight, 3000K, 1250 Lumen, E26
	21.5W	LEDR56HO/850	5/6" Downlight, 5000K, 1250 Lumen, E26
	22W	A/OM1600R/27K/LED	A21, 2700K, 1600 Lumen
	22W	A/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen
	22W	A/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen
	8W	LED8DA19/827	A19, 2700K, 450 Lumen, E26
	10.5W	FAM45LED11DAV3H	A19, 2700K, 800 Lumens, E26, 2pk
	11W	LED11DA19RVL/TP	A19, 2700K, 570 Lumen
	11W	LED11DA19V2	A19, 2700K, 800 Lumen
	12W	LED12DR30RVL/BK	BR30, Reveal
	12W	LED12DR30RVL/CDN	BR30, Reveal
	12W	LED12DR30RVL/TP	BR30, Reveal 2850K, 630 Lumen
	12W	LED12RS4RVLE26PB (95390)	Downlight, 2700K, 630 Lumen, E26
	12W	LED12RS4RVLGUPB (95391)	Downlight, 2700K, 630 Lumen, GU24
	12W	LED12RS6RVL326PB (95392)	Downlight, 2700K, 630 Lumen, E26
	12W	LED12RS6RVLGUPB (95393)	Downlight, 2700K, 630 Lumen, GU24
	18W	LED18D38W827/15	PAR38, 2700K, E26, 15° Beam
	18W	LED18D38W827/25	PAR38, 2700K, E26, 25° Beam
	18W	LED18D38W827/40	PAR38, 2700K, E26, 40° Beam
	18W	LED18D38W830/15	PAR38, 3000K, 1400 Lumen, E26, 15° Beam
	18W	LED18D38W830/25	PAR38, 3000K, 1400 Lumen, E26, 25° Beam

Feit

GE

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
GE	18W	LED18D38W830/40	PAR38, 3000K, 1400 Lumen, E26, 40° Beam
	18W	LED18D38W927/15	PAR38, 2700K, 1100 Lumen, E26, 15° Beam
	18W	LED18D38W927/25	PAR38, 2700K, 1100 Lumen, E26, 25° Beam
	18W	LED18D38W927/40	PAR38, 2700K, 1100 Lumen, E26, 40° Beam
	18W	LED18D38W930/15	PAR38, 3000K, 1200 Lumen, E26, 15° Beam
	18W	LED18D38W930/25	PAR38, 3000K, 1200 Lumen, E26, 25° Beam
	18W	LED18D38W930/40	PAR38, 3000K, 1200 Lumen, E26, 40° Beam
Halco	20W	PAR38FL20/827/LED	PAR38, 2700K, 1150 Lumen Flood
	20W	PAR38FL20/830/LED	PAR38, 3000K, 1200 Lumen Flood
	20W	PAR38FL20/840/LED	PAR38, 4000K, 1250 Lumen Flood
	20W	PAR38FL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
	20W	PAR38NFL20/827/LED	PAR38, 2700K, 1150 Lumen Flood
	20W	PAR38NFL20/830/LED	PAR38, 3000K, 1200 Lumen Flood
	20W	PAR38NFL20/840/LED	PAR38, 4000K Flood
	20W	PAR38NFL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
	20W	PAR38SP20/827/LED	PAR38, 2700K, 1150 Lumen Spot
	20W	PAR38SP20/830/LED	PAR38, 3000K, 1200 Lumen Spot
	20W	PAR38SP20/840/LED	PAR38, 4000K Spot
Halo	14.8W	SLD612827WHUNVJB	6" Downlight, 2700K, 1100 Lumen, E26
	14.8W	SLD612830WHUNVJB	6" Downlight, 3000K, 1150 Lumen, E26
	14.8W	SLD612835WHUNVJB	6" Downlight, 3500K, 1200 Lumen, E26
	14.8W	SLD612840WHUNVJB	6" Downlight, 4000K, 1215 Lumen, E26
	14.8W	SLD612927WHUNVJB	6" Downlight, 2700K, 880 Lumen, E26
	14.8W	SLD612930WHUNVJB	6" Downlight, 3000K, 925 Lumen, E26
	14.8W	SLD612935WHUNVJB	6" Downlight, 3500K, 965 Lumen, E26
Lighting Science	10.5W	LS 30 75WE xxx GB xx 120	PAR30, various color temperatures
	11.5W	DFN BR30 65WE CW 120†	BR30, Cool White, 5000K, Medium base
	11.5W	DFN BR30 65WE NW 120†	BR30, Neutral White, 4000K, Medium base
	11.5W	DFN BR30 65WE W27 120†	BR30, Warm White, 2700K, Medium base
	11.5W	DFN BR30 65WE WW 120†	BR30, Warm White, 3000K, Medium base
Litetronics	13W	LS GLP6 W27 120 WH S1 BX	6" Downlight, 2700K, E26 retrofit
	14W	LP14550FL2D	BR30, 2700K, 925 Lumen
	14W	LP14550FL4D	BR30, 3000K, 925 Lumen
	14W	LP14550FL6D	BR30, 4000K, 925 Lumen
Osram	6W	OSRAM 6W LED A19 270	A19, 2700K, 450 Lumen, E26, 40WE
	6W	OSRAM 6W LED A19 500	A19, 5000K, 450 Lumen, E26, 40WE
	10W	73157-1	5/6" Downlight, 4100K, 700 Lumen, E26
	10W	73159-1	5/6" Downlight, 5000K, 700 Lumen, E26
	10W	73394 (LEDRT56700827FL80)	5/6" Downlight, 2700K, 700 Lumen, E26
Philips	10W	73395-1	5/6" Downlight, 3000K, 700 Lumen, E26
	3.5W	9290002417	Candle, 2700K, 150 Lumen, E12 Candelabra base
	3.5W	9290002419	Candle, 2700K, 150 Lumen, E26 medium base, blunt tip clear
	3.5W	457226 (9290011668)	Candle, 2700K, 180 Lumen, E12, Warm Glow
	3.5W	457234 (9290011668)	Candle, 2700K, 180 Lumen, E12, Warm Glow
	3.5W	457242 (9290011668)	Candle, 2700K, 180 Lumen, E12, Warm Glow
	4.5W	454371	PAR16, 3000K, 315 Lumens
	4.5W	9290002439	Candle, Warm White, 2700K, 320 Lumen, E26 base, Post Light
	4.5W	9290002797†	Candle, 2700K, 330 Lumen, E26, blunt tip
	4.5W	9290002889†	Candle, 2700K, 330 Lumen, E12, blunt tip
	4.5W	9290002890†	A15, 2700K, 330 Lumen, E12
	4.5W	9290002891†	A15, 2700K, 330 Lumen, E26
	4.5W	457119 (9290011673)	Candle, 330Lm, E26
4.5W	457168 (9290011672)	G16.5, 330 Lm, E26	
4.5W	457184 (9290011670)	Candle, 330Lm, E12	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
	6W	9290002242	MR16, 3000K, 300 Lumen, GU10 base
	6W	9290002443	PAR16, 3000K, 300 Lumen, E26
	6W	456995 (9290011557)	R20, 2700K, 450 Lumen, Warm Glow
	6.5W	9290011347 (455741)	A19, Warm Glow, 450 Lumen
	8W	9290002267	A19, 2700K, 470 Lumen
	8W	9290002295	A19, 5000K, 470 Lumen
	8W	9290002329	PAR20, 3000K, 470 Lumen, E26
	8W	9290002330	PAR20
	8W	9290002331	PAR20
	8W	9290002332	PAR20
	8W	9290002333	PAR20
	8W	9290002334	PAR20
	8W	9290002335	PAR20
	8.5W	9290002543	BR30, 5000K, 730 Lumen, 8.5W
	9.5W	455840 (9290011345)	A19, Soft White, 2200-2700K, 800 Lumen, E26
	10W	458828 (9290011816)	A19, 2700K, 800 Lumen, 60WE, E26
	10W	459339 (9290011898)	G25, 2700k, 800 Lumen, E26
	10.5W	9290002544	BR30, 2700K, 730 Lumen
	10.5W	9290002707	A19 SlimStyle, Soft White, 2700K, 800 Lumen, 3pk
	11W	9290002268	A19, 2700K, 830 Lumen
	11W	9290002296	A19, 5000K, 830 Lumen
	11W	9290011113	PAR30L, 3000K, ? Lumen, E26
	12W	9290002580 (431392)	BR40, 2700K, 800 Lumen
	13W	9290011120	A21 SlimStyle, 2700K, 1100 Lumen
	13W	9290002523 13PAR38/F25 3000 DIM AF RO	PAR38, 3000K, 950 Lumen
Philips	14W	459065	A19, 2700K, 1100Lm, 75WE, E26
	14W	9290011839	A21, 2700K, 1100 Lumen, E26
	15W	9290002426	A21, 2700K, 1180 Lumen
	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26
	18W	9290011741	A21, 2700K, 1600Lumen, E26
	18W	459107 (9290011741)	A21, 2700K, 1600 Lumen, E26
	18W	459115 (9290011741)	A21, 2700K, 1600Lumen, E26
	18W	459123 (9290011741)	A21, 2700K, 1600Lumen, E26
	18W	459131 (9290011741)	A21, 2700K, 1600Lumen, E26
	19W	453340	A19, 2700K, 1620Lm, 100WE, E26
	19W	9290002473	PAR38, 3000K, 1250 Lumen
	19W	9290002577 (431395)	PAR38, 1300 Lumen, 25deg flood
	19W	9290002578 (431403)	PAR38, 1300 Lumen, 35deg flood
	19.5W	9290002251	PAR38, 3000K, 1210 Lumen
	19.5W	9290002252	PAR38, 2700K, 1183 Lumen
	19.5W	9290002253	PAR38, 3000K, 1212 Lumen
	19.5W	9290002291	PAR38, 4000K, 1207 Lumen
	19.5W	9290002312	PAR38, 2700K, 1100 Lumen
	19.5W	9290002313	PAR38, 2700K, 1196 Lumen
	19.5W	9290002314	PAR38, 3000K, 1200 Lumen
	19.5W	9290002315	PAR38, 3000K, 1225 Lumen
	19.5W	9290002316	PAR38, 4000K, 1200 Lumen
	19.5W	9290002317	PAR38, 4000K, 1245 Lumen
	19.5W	9290002321	PAR38, 2700K, 1172 Lumen
	19.5W	9290002322	PAR38, 5000K, 1300 Lumen
	22W	9290002290	A21, 2700K, 1780 Lumen, Medium base
Project Source	10W	DLS22-06B30D1E-WH-1	Downlight, 3000K, 650 Lumens, E26
	8W	S8794	A19, 2700K, 450 Lumen, GU10
	8W	S8995	A19, 3000K, 450 Lumen
Satco	9W	S8991	4" Downlight
	11W	S8993-S8994	BR30, 3000K, Medium and GU24 bases
	11W	S9043-S9045	BR30, various color temperatures

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
Satco	11W	S9084	PAR30, 3000K, 780 Lumen, E26, short neck, 25° Beam	
	11W	S9085	PAR30, 4000K, 780 Lumen, E26, short neck, 25° Beam	
	11W	S9086	PAR30, 3000K, 780 Lumen, E26, short neck, 40° Beam	
	11W	S9087	PAR30, 4000K, 780 Lumen, E26, short neck, 40° Beam	
	11W	S9088	PAR30, 3000K, 780 Lumen, E26, long neck, 25° Beam	
	11W	S9089	PAR30, 4000K, 780 Lumen, E26, long neck, 25° Beam	
	11W	S9090	PAR30, 3000K, 780 Lumen, E26, long neck, 40° Beam	
	11W	S9091	PAR30, 4000K, 780 Lumen, E26, long neck, 40° Beam	
	13W	S9003	R40, 3000K, 880 Lumen	
	13W	S9046	R40, 2700K, 850 Lumen	
	13W	S9047	R40, 4000K, 920 Lumen	
	13W	S9048	R40, 5000K, 950 Lumen	
	14W	S8947-S8949	PAR30 Longneck	
	14W	S8971-S8973	PAR30 Longneck	
	15W	S9440	PAR38, 2700k, 1100 Lumen, E26	
	15W	S9445	PAR38, 2700k, 1100 Lumen, E26	
	15W	S9454	PAR38, 2700k, 1100 Lumen, E26	
	17W	S8977-S8979	PAR38	
	17W	S8984-S8986	PAR38	
	17W	S9092	PAR38, 3000K, 1200 Lumen, E26, 25° beam	
	17W	S9093	PAR38, 4000K, 1200 Lumen, E26, 25° beam	
	17W	S9094	PAR38, 3000K, 1200 Lumen, E26, 40° beam	
	17W	S9095	PAR38, 4000K, 1200 Lumen, E26, 40° beam	
	18W	S9455	PAR38, 3000K, 1400 Lumen, E26, Flood	
	18W	S9456	PAR38, 4000K, 1400 Lumen, E26, Flood	
	Solais	7W	LRP20/25/27K	PAR20, 2700K, 475 Lumen, E26, 25° Beam
		7W	LRP20/25/30K	PAR20, 3000K, 500 Lumen, E26, 25° Beam
		7W	LRP20/40/27K	PAR20, 2700K, 475 Lumen, E26, 40° Beam
		7W	LRP20/40/30K	PAR20, 3000K, 500 Lumen, E26, 40° Beam
		11W	LR20/25/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, narrow flood
11W		LR20/25/30K/750	PAR20, 3000K, 750 Lumen, E26, narrow flood	
11W		LR20/40/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, wide flood	
11W		LR20/40/30K/750/xx	PAR20, 3000K, 750 Lumen, E26, wide flood	
16W		LR30/10/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 10° Beam	
16W		LR30/10/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 10° Beam	
16W		LR30/10/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 10° Beam	
16W		LR30/15/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 15° Beam	
16W		LR30/15/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 15° Beam	
16W		LR30/15/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 15° Beam	
16W		LR30/25/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 25° Beam	
16W		LR30/25/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 25° Beam	
16W		LR30/25/30K/1200/WH	PAR30, 3000K, 1200 Lumen, E26, short neck, 25° Beam	
16W		LR30/40/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 40° Beam	
16W		LR30/40/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 40° Beam	
16W		LR30/40/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 40° Beam	
16W		LRP38/25/27K	PAR38, 2700K, 1025 Lumen, E26, 25° Beam	
16W		LRP38/25/30K	PAR38, 3000K, 1100 Lumen, E26, 25° Beam	
16W		LRP38/40/27K	PAR38, 2700K, 1025 Lumen, E26, 40° Beam	
16W		LRP38/40/30K	PAR38, 3000K, 1100 Lumen, E26, 40° Beam	
20W		LR38/25/30K/1450/SL	PAR38, 3000K, 1450 Lumen, E26, 15° Beam	
28W		LR38/15/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W		LR38/15/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
28W		LR38/25/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W		LR38/25/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
28W		LR38/40/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W	LR38/40/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26		
Switch	10W	A260FUS27B1	A19, 800 Lumen	
	13W	75FU202	A19, 3000K, 1100 Lumen, E26	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Sylvania	6W	79643	A19, Soft White, 2700K, 450 Lumen, E26, clear
	6.5W	79162 (LED6.5A19/DIM/O/850/G5)	A19, 5000K, 450 Lumen, E26
	6.5W	79163 (LED6.5A19/DIM/O/850/G5)	A19, 2700K, 450 Lumen, E26
	7W	75169	G25, 475 Lumen, E26
	7W	75170	G25, 475 Lumen, E26
	7W	75180	G25, 475 Lumen, E26
	7W	79653 (LED7R20DIMSE830G3RP [LW])	R20, 3000K, 525 Lumen, E26,
	7W	79659 (LED7R20/DIM/SE/830/G3)	R20, 3000K, 525 Lumen, E26,
	7W	LED7A19/DIM/O/SE/830 (78214)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
	7W	LED7A19/DIM/O/SE/830/RP (78213)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
	8W	70419-6	4" Downlight, 600 Lumen, retrofit kit
	8W	70459-3	4" Downlight, 600 Lumen, retrofit kit
	8W	70643-3	4" Downlight, 600 Lumen, retrofit kit
	8W	73193-1	4" Downlight, 600 Lumen, retrofit kit
	8W	LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26
	8W	LED8PAR16/DIM/930/FL36/P/LW	PAR16, Soft White, 390 Lumen
	8W	LED8PAR16/GU10/DIM/930/FL36/RP	PAR16, GU10, Soft White, 390 Lumen
	8W	LED8R20/DIM/SE/830/RP	R20, Soft White, 2700K to 2000K, 520 Lumen
	10W	LED/600/RT4/830/FL80/RP	Recessed lighting kit, 3000K, 600 Lumen
	10W	LED/RT4/600/827/FL80	Recessed lighting kit, 2700K, 600 Lumen
	10W	LED10A19/DIM/O/SE/830	A19, 3000K, 800 Lumen
	10W	LED10A19/DIM/O/SE/830/RP (78215)	A19, 3000K, 800 Lumen
	10.5W	LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE
	11W	73195-0	Downlight
	11W	73497-0	Downlight
	11W	79654 (LED11BR30DIMSE830G3RP[LW])	BR30, 3000K, 800 Lumen, E26
	11W	79657 (LED11BR30/DIM/SE/830/G3)	BR30, 3000K, 800 Lumen, E26
	11W	79660 (LED11BR30DIMSE830G3RP)	BR30, 3000K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3 (78413)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (78415)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (79121)	BR30, 2700K, 800 Lumen, E26
	12W	72578 (LEDRT56700927FL80CEC)	5/6" Downlight, 2700K, 900 Lumen, GU24
	12W	72579-0	5/6" Downlight, 3000K, 900 Lumen, GU24
	12W	72593-0	5/6" Downlight, 4000K, 900 Lumen, GU24
	12W	LED12BR30/DIM/HO/827	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/HO/827/HVP	BR30, 2700K, Medium base

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Sylvania	12W	LED12BR30/DIM/SE/830/RP	BR30, Soft White, 2700K to 2000K, 850 Lumen
	14W	74031 (LED14PAR38DIM850FL40GL1WRP)	PAR38, 5000K, 1050 Lumen, E26
	14W	74032 (LED14PAR38DIM830NFL25GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74034 (LED14PAR38DIM830FL40GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74035 (LED14PAR38DIM830NFL25GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74036 (LED14PAR38DIM830WSP15GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74037(LED14PAR38DIM827FL40GL1W)	PAR38, 2700K, 1050 Lumen, E26
	14W	74065 (LED14PAR38DIM850FL40GL1WRP)	PAR38, 5000K, 1050 Lumen, E26
	14W	74066 (LED14PAR38DIM830FL40GL1WRP)	PAR38, 3000K, 1050 Lumen, E26
	14W	74067 (LED14PAR38DIM830FL40GL1WRP)	PAR38, 3000K, 1050 Lumen, E26
	15W	79655 (LED15BR40DIMSE830G3RP [LW])	BR40, 3000K, 1100 Lumen, E26
	15W	79661 (LED15BR40DIMSE830G3RP)	BR40, 3000K, 1100 Lumen, E26
	15W	LED15BR40/DIM/HO/827/G3/RP	BR40, Soft White, 2700K, 1100 Lumen, E26, Flood
	15W	LED15BR40/DIM/SE/830/G3	BR40, 3000K, 1100 Lumen, E26,
	16W	LED16BR40DIMHO827	BR40, 2700K, 1100Lumen
	17W	LED17PAR30LN/DIM/830/WSP15/P	PAR30, 3000K, 1200 Lumen, E26, spot
	17W	LED17PAR30LN/DIM/830/WSP20	PAR30, 3000K, 1200 Lumen, E26, wide spot
	18W	LED18PAR38/DIM/827/NFL25	PAR38, 2700K, 860 Lumen
	20W	LED20PAR38/DIM/930/FL40/P2	PAR38, 3000K, 1000 Lumen,
	20W	LED20PAR38DIM830FL40	PAR38, 3000K, 1300 Lumen
21W	LED21/PAR38/DIM/P/930/FL30/HVP	PAR38, Warm White, 3000K, 1100 Lumen, E26, 21W	
TCP	12W	LED12P30D27KNFL	PAR30,2700K,800 Lumen,E26
	17W	LED17BR40D27K (LED17BR40D)	BR40, 2700K, 1200 Lumen, E26
	17W	LED17HOP38D27KNFL (LED17P38D1)	PAR38, 2700K, 1550 Lumen, E26, Narrow Flood
	17W	LED17P38D24KNFL	PAR38, 2400K, 1105 Lumen, E26
Toshiba	13W	LDRB1327WE6USD2 (13BR40/27K-T)	BR40, 2700K, 950 Lumen
	13W	LDRB1340WE6USD2 (13BR40/40L-T)	BR40, 4000K, 1050 Lumen
Utilitech	3W	LG161/2DM/IF/LED	G16.5, Warm White, 3000K, 200 Lumen, E12 base, frosted
	4.5W	LR14DMLED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	4.8W	LA15DM/CL/300/LED	A15, Warm White, 3000K, 300 Lumen, E26, clear
	4.8W	LA15DM/IF/300/LED	A15, Warm White, 3000K, 300 Lumen, E26, frosted
	4.8W	LA15DMC/CL/300/LED	A15, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LCFFDM/300/LED	Candle, Warm White, 3000K, 300 Lumen, E12 base, frosted flame tip
4.8W	LEFCDM/300/LED	Candle, Warm White, 3000K, 300 Lumen, E26 base, clear flame tip	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
	4.8W	LG161/2DM/CL/300/LED	G16.5, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LG161/2DM/IF/300/LED	G16.5, Warm White, 3000K, 300 Lumen, E12 base, frosted
	4.8W	LGMDM/CL/300/LED	G16.5, Warm White, 3000K, 300 Lumen, E26, clear
	5.5W	LMR16GU10DMLEDG2	MR16, 2700K, 350 Lumen, GU10, Flood
	6.5W	LMR16/GU10/DM/LED	MR16, GU10 base
	6.5W	LMR16DMGU10	MR16, GU10 base
	6.5W	LR16DMLED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	LA19DM/GU24/LED	A19, 3000K, GU24
	7.5W	LA19DM/LED	A19, 3000K, 450 Lumen, E26
	7.5W	LA19DM/LEDG2	A19, 3000K, 450 Lumen
	7.5W	R20/DM/5K/LED	R20, 450 Lumen, E26
	8W	BPCER20/927/LED	R20, 450 Lumen, E26
	8W	LA19DM/5K/LED	A19, 5000K
	8W	LCFCDM500LED	Candle, 3000K, 500 Lumen, E12 candle base
	8W	LG25DM/LEDG2	G25, Warm White, 3000K, 510 Lumen, E26
	8W	LR20DM/LED†	R20, 2700K, 450 Lumen (90mA ridged reflector version)
	8W	R20/927/LED	R20, 450 Lumen, E26
	8W	R20/DM/LEDG2	R20, 450 Lumen, E26
	8W	R20DM/LEDG2/CAN	R20, 450 Lumen, E26
	8.5W	LMR16DMGU10/500/LED	MR16, Warm White, 3000K, 520 Lumen, GU10, 120V
	8.5W	LPAR20LEDG72	PAR20, 500 Lumen, 2PK
	9W	LR20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9W	R20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9.5W	AGOM800/5K/LED/CAN	A19, 810 Lumen, E26
	9.5W	AGOM800/927/LED	A19, 810 Lumen, E26
	9.5W	AGOM800/927/LED/CAN	A19, 810 Lumen, E26
	9.5W	AGOM800/LED/3/CAN	A19, 800 Lumen, E26
	9.5W	AGOM800/LED/CAN	A19, 800 Lumen, E26
	9.5W	BPAGOM800/5K/LED	A19, 810 Lumen, E26
	9.5W	BPAGOM800/LED	A19, 800 Lumen, E26
	9.5W	BPAGOM800/LED/TAR	A19, 800 Lumen, E26
	9.5W	BPAGOM800/LED/TV	A19, 800 Lumen, E26
	9.5W	BPCEAG800/927/LED/3	A19, 810 Lumen, E26
	9.5W	LPAR20/5K/LEDG5	PAR20, 5000K, 500 Lumen
	9.5W	LPAR20/LEDG5	PAR20, 3000K, 450 Lumen
	9.5W	LPAR20DM/SP/LED	PAR20, 3000K, 465 Lumen, Spot
	9.8W	LA19DM/800/LED/G2	A19, 3000K, 800 Lumen
	10W	LA19DM/800/5K/LEDG2	A19, 5000K
	10W	LA19DM/800/LEDG2	A19, 3000K, 800 Lumen
	11W	DLS02-04A27D1E-WH-F1	4" Downlight, 2700K, 600 Lumen, E26 retrofit
	11W	DLS02-04A27D1E-WH-F2	4" Downlight, 2700K, 600 Lumen, E26 retrofit 2pk
	11W	DLS02-41127D1E-WF1	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	12W	LPAR30L/LEDG7/2	PAR30L, 3000K, 800 Lumen, E26, long neck, 2PK
	13W	BPCEBR30/927/LED	BR30, 750 Lumen, E26
	13W	BR30/927/LED	BR30, 750 Lumen, E26
	13W	BR30/927/LED/CAN	BR30, 750 Lumen, E26
	13W	BR30/DM/LEDG2	BR30, 750 Lumen, E26
	13W	BR30DM/LED/CAN	BR30, 750 Lumen, E26
	13W	DLS03-06E30D1E-WH-F1	Downlight 3000K 700 Lumens 65WE
	13W	LBR30DM/LEDG2	BR30
	13.5W	LA19/OM800/LED	A19, 3000K, 800 Lumen, Omni Directional
	15W	15PAR30L/LEDG5	PAR30, 3000K, 790 Lumen, E26
	15W	BPCEPAR30/930/LED	PAR30, 3000K, 770 Lumen, E26
	15W	LBR30HO/LED/G2	BR30, Soft White, 1150 Lumen
	15W	LPAR30L/5K/LEDG5	PAR30, 5000K, 800 Lumen, long neck flood
	15W	LPAR30L/LEDG5	PAR30, 3000K, 790 Lumen, long neck flood
	15W	LPAR30LDM/SP/LED	PAR30, 3000K, 790 Lumen, long neck, spot

Utilitech

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Utilitech	15W	LPAR30S/LEDG5	PAR30, 3000K, 750 Lumen, short neck flood
	15W	PAR30/S/5K/LEDG5	PAR30, 3000K, 750 Lumen, E26
	15W	PAR30/S/LEDG5	PAR30, 3000K, 750 Lumen, E26
	15W	PAR30L/5K/LEDG5	PAR30, 3000K, 800 Lumen, E26
	15W	PAR30L/930/LED	PAR30, 3000K, 770 Lumen, E26
	15W	PAR30L/LEDG5	PAR30, 3000K, 800 Lumen, E26
	15.5W	BPCEAG1600/827/LED	A19, 1600 Lumen, E26
	16W	AGOM1600/5K/LED/CAN	A19, 1600 Lumen, E26
	16W	AGOM1600/LED/CAN	A19, 1600 Lumen, E26
	16W	BPAGOM1600/5K/LED	A19, 1600 Lumen, E26
	16W	BPAGOM1600/LED	A19, 1600 Lumen, E26
	16W	BPAGOM1600/LED/TAR	A19, 1600 Lumen, E26
	16W	LA19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional
	16W	LBR40DM/LEDG2	BR40, 1065 Lumen, E26
	16W	LBR40DMLEDG2	BR40, 2700K, 1065 Lumen
	16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK
	16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK
	16.5W	PAR38/5K/LEDG5	PAR30, 3000K, 1000 Lumen, E26
	17W	BPCEBR40/DM/LED [†]	BR40
	17W	LBR40DM/LED [†]	BR40, 2700K, 1065 Lumen
	18W	BPCEPAR38/930/LED	PAR30, 3000K, 950 Lumen, E26
	18W	PAR38/930/LED	PAR30, 3000K, 950 Lumen, E26
	20W	20PAR38/LEDG5	PAR30, 3000K, 1035 Lumen, E26
	20W	DLS24-06C27D1E-WH-F1	5 or 6" Downlight 2700K 1200 Lumens 90WE
	20W	L20PAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood
	20W	LBR40HO/LED/G2	BR40, Soft White, 1400 Lumen
	20W	LPAR38/5K/LEDG5	PAR38, 5000K, 1000 Lumen, flood
	20W	LPAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood
	20W	LPAR38DM/SP/LED	PAR38, 3000K, 1000 Lumen, Spot
	20W	PAR38/LEDG5	PAR30, 3000K, 950 Lumen, E26
	20.5W	LPAR381400LEDG72	PAR38, 1450 Lumen, 2PK
	22W	LA/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen
	22W	LA/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen
23W	LPAR38/1400/5K/LEDG5	PAR38, 5000K, 1400 Lumen	
23W	LPAR38/1400/LEDG5	PAR38, 3000K, 1400 Lumen	
Westinghouse	6W	33098	A19, 3000K, 470 Lumen
	6.5W	03425	A19, 2700K, 450 Lumen, E26, 40WE
	7W	33012	Par20, 3000K, 415 Lumen
	8W	03011	G25, 3000K, 430 Lumen
	8.5W	43000	R30, 2700K, 650 Lumen, flood
	9W	03563	BR30, 2700K, 750 Lumen, E26
	10W	03439	A19, 3000K, 800 Lumen, E26, 60WE
	10W	03696	A19, 2700K, 790 Lumen, E26, 60WE
	17W	33014	PAR38, 3000K, 1200 Lumen, flood
	17W	33064	PAR38, 3000K, 1200 Lumen, flood

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for Maestro[®] C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
EcoSmart	5W	8TC05 [†]	Candle, (ES5CCDF052, ES9CCDF052)
	5W	8TC05F [†]	Candle, Torpedo Tip, 2700K, 200 Lumen
	5W	8TFC05F [†]	Candle, Flame Tip, 2700K, 200 Lumen
	11W	BPESL11R20/DM/ESM	R20, Soft White
	14W	40114	Spiral, Soft White (ES5M814DIM2, ES9M814DIM2)
	14W	2R2014DIM	R20, 2700K, 410 Lumen
	15W	2R3015DIM	R30 Flood, Soft White (ES5R315DIM2)
	15W	2R3015DIM35K	R30 Flood, Bright White (ES5R315DIM35K)
	15W	2R3015DIM50K	R30 Flood, Daylight (ES5R315DIM250K)
Feit	23W	40123	Spiral, Soft White (ES5M823DIM2)
	11W	BPESL11R20/DM	R20
	15W	BPESL15T/DM	Spiral
	23W	BPESL23R40/DIM	R40
GE	23W	BPESL23T/DM	Spiral
	26W	FLE26/2/DVR/40	R40
Philips	26W	FLE26HT3/2/DV/SW	Spiral
	20W	EL/A R40 Dim 20W	R40
Sylvania	5W	CF5EL/B10/827/L/DIM [†]	Candle
	5W	CF5EL/B10C/DIM/827/ADP [†]	Candle
	5W	CF5EL/DEC/DIM [†]	Candle
	14W	CF14EL/TWIST/DIM	Spiral
	24W	CF24EL/TWIST/DIM	Spiral
TCP	5W	8TC05F [†]	Candle
	5W	8TFC05F [†]	Candle, flame tip
	14W	40114	Spiral
	14W	2R2014DIM	R20, 2700K, 410 Lumen
	14W	4R2014TD	R20, TruDim, 2700K
	14W	4R2014TD30K	R20, TruDim, 3000K
	14W	4R2014TD35K	R20, TruDim, 3500K
	14W	4R2014TD41K	R20, TruDim, 4100K
	14W	4R2014TD50K	R20, TruDim, 5000K
	14W	4R2014TD65K	R20, TruDim, 6500K
	15W	2R3015DIM	R30, Soft White, 2700K
	16W	4R3016TD	R30, TruDim, 2700K
	16W	4R3016TD30K	R30, TruDim, 3000K
	16W	4R3016TD35K	R30, TruDim, 3500K
	16W	4R3016TD41K	R30, TruDim, 4100K
	16W	4R3016TD50K	R30, TruDim, 5000K
	16W	4R3016TD65K	R30, TruDim, 6500K
	23W	40123	Spiral
	Utilitech	11W	LBP11R20DM
15W		LBP15TDM	Spiral
23W		LBP23R40DM	R40
23W		LBP23TDM	Spiral

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva® C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour® C•L: CTCL-153P
Skylark® C•L: LGCL-153PH
Lumea® C•L: LGCL-153PH
Toggler®/Ariadni® C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Cree	6W	BA19-04527OMB-12DE26-3_1	A19 4Flow, 83CRI, 2700K, 460 Lumen, E26
	6W	BA19-04527OMF-12DE26-1U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04527OMF-12DE26-2U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04527OMF-12DE26-3U100	A19 4Flow, 2700K, 460 Lumen, E26
	6W	BA19-04550OMB-12DE26-3_1	A19 4Flow, 83CRI, 5000K, 460 Lumen, E26
	6W	BA19-04550OMF-12DE26-2U500	A19, 5000K, 450 Lumen, 40WE, 4pk
	6W	BA19-04550OMF-12DE26-3U100	A19 4Flow, 5000K, 460 Lumen, E26
	9.5W	BA19-08027OMF-12DE26-2U100	A19, Soft White, 2700K, 800 Lumen, Medium base
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk
	9.5W	BBR30-06527FLF-12DE26-1U100	BR30, 650 Lumen, Soft White, 2700K
	9.5W	BBR30-06550FLF-12DE26-1U100	BR30, Daylight, 5000K 650 Lumen, 9.5W
	9.5W	BBR40-07627FLF-12DE26-1U_00	BR40, 2700K, 760 Lumen, Flood
	9.5W	BBR40-07650FLF-12DE26-1U10	BR40, 5000K, 760 Lumen, Flood
	10W	BA19-08027OMB-12DE26-3_1	A19, 4Flow, 2700K, 815 Lumen, E26, 83 CRI
	10W	BA19-08050OMB-12DE26-3_1	A19, 4Flow, 5000K, 815 Lumen, E26, 83 CRI
	10.5W	BPAR30L-0853025C-12DE26-1C100	PAR30L, 3000K, 850 Lumen, 25° Spot
	10.5W	BPAR30L-0853040C-12DE26-1C100	PAR30L, 3000K, 850 Lumen, 40° Flood
	10.5W	BPAR30S-0853040C-12DE26-1C100	PAR30S, 3000K, 850 Lumen, 40° Flood
	11.5W	DRDL4-05727009-12DE26-1C100	4" Downlight, 2700K TW, 575 Lumen, E26 retrofit
	12.5W	DRDL6-06227009-12DE26-1C100	6" Downlight, 2700K TW, 625 Lumen, E26 retrofit
	12.5W	DRDL6-06250009-12DE26-1C100	6" Downlight, 5000K TW, 625 Lumen, E26 retrofit
	15W	DRDL6-11027009-12DE26-1C100	6" Downlight, 2700K, 1100 Lumen
	16.5W	BPAR38-1503027T-12DE26-2U_00	PAR38, 3000K, 1510Lm, E26, Spot
	16.5W	BPAR38-1503047T-12DE26-2U_00	PAR38, 3000K, 1510Lm, E26, Flood
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W
	18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W
18W	BPAR38-1503027T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 27 deg spot	
18W	BPAR38-1503047T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 47 deg flood	
EcoSmart	4W	ECS B11 CA W27 25WE CL E26 120 DG	B11, 2700K, 200 Lumen, E26
	5W	5020001XXYY	Candle, 2700K, 350 Lumens
	5.5W	5bHPR500STW1D18	PAR20, 3000K 450Lm, E26
	5.5W	5bHPR500STW1D19	PAR20, 5000K 470Lm, E26
	6W	ECS 25 40WE W27 120 DG†	G25, 2700K, 400 Lumen, E12
	6W	ECS GP19 WW 40WE 120	A19, 3000K
	6.5W	50217013006	PAR20, 3000K, 450 Lumens
	7W	ECS 25 60WE W27 120 DG†	G25, 2700K, E12
	7.5W	BPA15/CL/500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E26
	7.5W	BPA15C/CL500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E12
	7.5W	BPCFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E12
	7.5W	BPEFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E26
	7.5W	BPGM/CL/500/LED/ESM	G16.5, Soft White, 2700K, 500 Lumen, E26
	8W	ECS 20 CW FL 50WE 120†	PAR20, 5000K, 490 Lumen
	8W	ECS 20 WW FL 50WE 120†	PAR20, 3000K, 450 Lumen
	8W	ECS A19 CW 40WE 120†	A19, 5000K, 480 Lumen
	8W	ECS A19 WW 40WE 120†	A19, 3000K, 450 Lumen
	8W	ECS BR20 50WE CW 120 DG†	BR20, Daylight, 5000K, 600 Lumen, E26
	8W	ECS BR20 50WE W27 120†	BR20, Soft White, 2700K
	8W	ECS BR20 50WE WW 120 DG†	BR20, Warm White, 3000K, 550 Lumen, E26

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
EcoSmart	9W	5bSA800STQ1D02	A19, 3000K, 800Lm, E26, 4pk
	9W	A810SS-Q1D-01 (5bSA800STQ1D01)	A19, 2700K, 800Lm, E26
	9W	A810SS-Q1D-04 (5bSA800STQ1D03)	A19, 5000K, 840Lm, E26, 4pk
	9.5W	5bHPR650STW1D29	PAR30, 3000K, 650Lm, E26
	9.5W	5bHPR650STW1D30	PAR30, 3000K, 680Lm, E26
	9.5W	ECS DN4 CW E26 120	4" Downlight, Daylight, 5000K, 650 Lumen, E26, retrofit
	9.5W	ECS DN4 CW GU24 120	4" Downlight, Daylight, 5000K, 650 Lumen, GU24 base, retrofit
	9.5W	ECS DN4 W27 E26 120	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	9.5W	ECS DN4 W27 GU24 120	4" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit
	9.5W	ECS DN6 CW GU24 120	6" Downlight, Daylight, 5000K, 650 Lumen, GU24 base, retrofit
	9.5W	ECS DN6 W27 E26 120	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	9.5W	ECS DN6 W27 E26 120 2BX	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit, 2pk
	9.5W	ECS DN6 W27 E26 120 BX V3	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	9.5W	ECS DN6 W27 GU24 120	6" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit
	10W	DL-N14A10FR1-27	5/6" Downlight, 2700K, 650Lm, E26
	10W	DL-N14A10FR1-50	5/6" Downlight, 5000K, 650Lm, E26
	10W	DL-N14A10FR2-27	5/6" Downlight, 2700K, 650Lm, GU24
	10W	DL-N14A10FR2-50	5/6" Downlight, 5000K, 650Lm, GU24
	10W	ECS BR30 65WE CW 120 DG [†]	BR30, Daylight, 5000K, 700 Lumen, E26
	10W	ECS BR30 65WE CW 120 DG 3PK [†]	BR30, Daylight, 5000K, 700 Lumen, E26, 3pk
	10W	ECS BR30 65WE W27 120 DG [†]	BR30, Soft White, 2700K, 650 Lumen, E26
	10W	ECS BR30 65WE W27 120 DG 3BX [†]	BR30, Soft White, 2700K, 650 Lumen, E26, 3pk
	10W	ECS BR30 65WE WW 120 DG [†]	BR30, Warm White, 3000K, 650 Lumen, E26
	10.5W	ECS 30 75WE WW GB FL 120	PAR30 Gimbal, 3000K, 750 Lumen, E26, 75WE
	10.5W	ECS 30 75WE xxx GB xx 120	PAR30 Gimbal, Various color temperatures, 75WE
	11W	5020901XXYY [†]	BR30, 2700K, 770 Lumens
	11W	ECS RFK6 65WE W27 120 REC [†]	Downlight, Soft White, 2700K, 600 Lumen, E26
	13W	5bHPR1000SW1D19	PAR38, 3000K, 900Lm, E26
	13W	5bHPR1000SW1D20	PAR38, 5000K, 1000Lm, E26
	15W	ECS 38 CW FL 90WE 120	PAR38, 5000K, 970 Lumen
15W	ECS 38 WW FL 90WE 120	PAR38, 3000K, 900 Lumen	
16W	ECS 38 90WE WW FL 120 TP	PAR38, Bright White, 3000K, 1000 Lumen, E26	
19W	ECS 38 120WE WW FL 120 TP	PAR38, Bright White, 3000K, 1300 Lumen, E26	
Energetic	17.5W	ELY17D-2BRW-VB	BR40, 2700K, 1100 Lumen
	4.5W	R14DM/LED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	4.8W	CFCDM/300/LED [†]	Candle, 3000K, 310 Lumen, Candelabra Base
	4.8W	EFCDM/300/LED [†]	Candle, 3000K, 310 Lumen, Medium Base
	4.9W	BPCEFC/927/LED/3	Candle, 2700K, 330 Lumen, E12
Feit	6.5W	BPMP16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	MR16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	R16DM/LED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	8W	A19/DM/GU24/LED	A19, 3000K, GU24 Base
	8W	A19/DM/LED	A19, 3000K
	8W	A19/DM/LED/CAN	A19
	8W	A19/DM/LED/RP/CAN	A19
	8W	A19DM/5K/LED	A19, 5000K
	8W	BPCEA19/DM/LED	A19

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggle[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
	8W	BPCEG25/927/LED/3	G25, 2700K, 495 Lumen, E26
	8W	BPCER20/DM/LED	R20 (90mA ridged reflector version)
	8W	BPCER20/DM/LED	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	8W	R20/927/LED	R20, 2700K
	8W	R20/930/LED	R20, 3000K
	8W	R20/950/LED	R20, 5000K,
	8W	R20/DM/LED	R20, 2700K, 450 Lumen (90mA ridged reflector version)
	8W	R20DM/LED/CAN	R20 (90mA ridged reflector version)
	8W	R20DM/LEDG2/CAN	R20, 2700K
	8.5W	BR30M65/LED/6	R30, 650 Lumen, E26
	9.5W	BPCER20/DM/LED	PAR20
	9.5W	PAR20/5K/LEDG5	PAR20, 5000K
	9.5W	PAR20/5K/LEDG5/CAN	PAR20, 5000K
	9.5W	PAR20/LEDG5	PAR20, 3000K, 450 Lumen
	9.5W	PAR20/LEDG5/CAN	PAR20
	9.7W	CELEDRT4/927	4" Downlight, 2700K, 520 Lumen, E26
	9.7W	EDRT4/927	4" Downlight, 2700K, 520 Lumen, E26
	9.7W	LEDR4/827	4" Downlight, 2700K, 520 Lumen, E26
	9.7W	LEDR4/830	4" Downlight, 3000K, 520 Lumen, E26
	9.7W	LEDR4/850	4" Downlight, 5000K, 520 Lumen, E26
	9.7W	LEDRT4/927	4" Downlight, 2700K, 520 Lumen, E26
	9.7W	LEDRT4/940	4" Downlight, 4000K, 520 Lumen, E26
	10W	BPAG800/5K/LED	A19, 5000K
	10W	BPAG800/LED	A19, 3000K, 800 Lumen
	13W	BPCEBR30LED	BR30
	13.5W	A19/OM800/5K/LED	A19, 5000K, Omni Directional
	13.5W	A19/OM800/LED	A19, 3000K, Omni Directional
	13.5W	BPCEA19/OM800/LED	A19, Omni Directional
	13.5W	BPCEA19/OM800/LED/CAN	A19, Omni Directional
	14W	LEDR56/830	Downlight, 3000K, 925 Lumen, retrofit kit
	15W	BPCEPAR30/LEDG5	PAR30
	15W	PAR30L/5K/LEDG5	PAR30, 5000K
	15W	PAR30L/5K/LEDG5/CAN	PAR30, 5000K
	15W	PAR30L/LEDG5	PAR30
	15W	PAR30L/LEDG5/CAN	PAR30
	16W	A19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional
	16.8W	LEDR56/3K	5" or 6" Downlight, 3000K, 840 Lumen
	17W	BPCEBR40/LED	BR40, 2700K, 1065 Lumen
	18W	18PAR38/DM/LED	PAR38, 3000K
	20W	20PAR38/LEDG5	PAR38
	20W	BPCEPAR38/LEDG5	PAR38
	20W	PAR38/5K/LEDG5	PAR38, 5000K
	20W	PAR38/5K/LEDG5/CAN	PAR38, 5000K
	20W	PAR38/LEDG5	PAR38
	20W	PAR38/LEDG5/CAN	PAR38
	21.5W	CELEDRT56/927/2	5/6" Downlight, 2700K, 1250 Lumen, E26
	21.5W	LEDR56/827	5/6" Downlight, 2700K, 1250 Lumen, E26
	21.5W	LEDR56/927/MP/4	5/6" Downlight, 2700K, 1250 Lumen, E26, 4 pack
	21.5W	LEDR56HO/830	5/6" Downlight, 3000K, 1250 Lumen, E26
	21.5W	LEDR56HO/850	5/6" Downlight, 5000K, 1250 Lumen, E26
	22W	A/OM1600R/27K/LED	A21, 2700K, 1600 Lumen
	22W	A/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen
	22W	A/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen
GE	8W	LED8DA19/827	A19, 2700K, 450 Lumen, E26

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
GE	10.5W	FAM45LED11DAV3H	A19, 2700K, 800 Lumens, E26, 2pk
	11W	LED11DA19RVL/TP†	A19, 2700K, 570 Lumen
	11W	LED11DA19V2†	A19, 2700K, 800 Lumen
	12W	LED12DR30RVL/BK	BR30, Reveal
	12W	LED12DR30RVL/CDN	BR30, Reveal
	12W	LED12DR30RVL/TP	BR30, Reveal 2850K, 630 Lumen
	12W	LED12RS4RVLE26PB (95390)	Downlight, 2700K, 630 Lumen, E26
	12W	LED12RS4RVLGUPB (95391)	Downlight, 2700K, 630 Lumen, GU24
	12W	LED12RS6RVL326PB (95392)	Downlight, 2700K, 630 Lumen, E26
	12W	LED12RS6RVLGUPB (95393)	Downlight, 2700K, 630 Lumen, GU24
	18W	LED18D38W827/15	PAR38, 2700K, E26, 15° Beam
	18W	LED18D38W827/25	PAR38, 2700K, E26, 25° Beam
	18W	LED18D38W827/40	PAR38, 2700K, E26, 40° Beam
	18W	LED18D38W830/15	PAR38, 3000K, 1400 Lumen, E26, 15° Beam
	18W	LED18D38W830/25	PAR38, 3000K, 1400 Lumen, E26, 25° Beam
	18W	LED18D38W830/40	PAR38, 3000K, 1400 Lumen, E26, 40° Beam
	18W	LED18D38W927/15	PAR38, 2700K, 1100 Lumen, E26, 15° Beam
	18W	LED18D38W927/25	PAR38, 2700K, 1100 Lumen, E26, 25° Beam
	18W	LED18D38W927/40	PAR38, 2700K, 1100 Lumen, E26, 40° Beam
	Halco	18W	LED18D38W930/15
18W		LED18D38W930/25	PAR38, 3000K, 1200 Lumen, E26, 25° Beam
18W		LED18D38W930/40	PAR38, 3000K, 1200 Lumen, E26, 40° Beam
20W		PAR38FL20/827/LED	PAR38, 2700K, 1150 Lumen Flood
20W		PAR38FL20/830/LED	PAR38, 3000K, 1200 Lumen Flood
20W		PAR38FL20/840/LED	PAR38, 4000K, 1250 Lumen Flood
20W		PAR38FL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
20W		PAR38NFL20/827/LED	PAR38, 2700K, 1150 Lumen Flood
20W		PAR38NFL20/830/LED	PAR38, 3000K, 1200 Lumen Flood
20W		PAR38NFL20/840/LED	PAR38, 4000K Flood
20W		PAR38NFL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
Halo		20W	PAR38SP20/827/LED
	20W	PAR38SP20/830/LED	PAR38, 3000K, 1200 Lumen Spot
	20W	PAR38SP20/840/LED	PAR38, 4000K Spot
	20W	PAR38SP20/850/LED	PAR38, 5000K, 1300 Lumen Spot
	12.2W	SLD405830WHR	4" Downlight, 3000K, 650 Lumen, E26 kit
	12.2W	SLD405xxxx	4" Downlight, 710-800 Lumen, 12W to 12.2W
	12.2W	SLD606830WHR	5"/6" Downlight, 3000K, 675 Lumen, E26 kit
	12.2W	SLD606xxxx	5"/6" Downlight, 780-800 Lumen, 12.2W to 13.2W
	14.8W	SLD612827WHUNVJB†	6" Downlight, 2700K, 1100 Lumen, E26
	14.8W	SLD612830WHUNVJB†	6" Downlight, 3000K, 1150 Lumen, E26
	14.8W	SLD612835WHUNVJB†	6" Downlight, 3500K, 1200 Lumen, E26
	14.8W	SLD612840WHUNVJB†	6" Downlight, 4000K, 1215 Lumen, E26
	14.8W	SLD612927WHUNVJB†	6" Downlight, 2700K, 880 Lumen, E26
	14.8W	SLD612930WHUNVJB†	6" Downlight, 3000K, 925 Lumen, E26
	14.8W	SLD612935WHUNVJB†	6" Downlight, 3500K, 965 Lumen, E26
	14.8W	SLD612940WHUNVJB†	6" Downlight, 4000K, 1000 Lumen, E26
	15.2W	SLD612827WH	Downlight, 2700K, 1200Lm, E26
	15.2W	SLD612830WH	Downlight, 3000K, 1200Lm, E26
	15.2W	SLD612835WH	Downlight, 3500K, 1200Lm, E26
	15.2W	SLD612840WH	Downlight, 4000K, 1200Lm, E26
15.2W	SLD612927WH	Downlight, 2700K, 1200Lm, E26	
15.2W	SLD612930WH	Downlight, 3000K, 1200Lm, E26	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Halo	15.2W	SLD612935WH	Downlight, 3500K, 1200Lm, E26
	15.2W	SLD612940WH	Downlight, 4000K, 1200Lm, E26
Lighting Science	10.5W	LS 30 75WE xxx GB xx 120	PAR30, various color temperatures
	13W	LS GLP6 W27 120 WH S1 BX	6" Downlight, 2700K, E26 retrofit
Litetronics	14W	LP14550FL2D	BR30, 2700K, 925 Lumen
	14W	LP14550FL4D	BR30, 3000K, 925 Lumen
	14W	LP14550FL6D	BR30, 4000K, 925 Lumen
Megaman	3.2W	LC1503.2DCS-E12-27K	B10, 2700K, 250Lm, E12
	10.5W	LR5210.5DDG-WFL-E26-27K	PAR30S, 2700K, 800Lm, E26
Osram	10W	73157-1	5/6" Downlight, 4100K, 700 Lumen, E26
	10W	73159-1	5/6" Downlight, 5000K, 700 Lumen, E26
	10W	73394 (LEDRT56700827FL80)	5/6" Downlight, 2700K, 700 Lumen, E26
	10W	73395-1	5/6" Downlight, 3000K, 700 Lumen, E26
	13W	73396 (LEDRT56900827FL80)	5/6" Downlight, 2700K, 900 Lumen, E26
Philips	3.5W	457226 (9290011668)	Candle, 2700K, 180 Lumen, E12, Warm Glow
	3.5W	457234 (9290011668)	Candle, 2700K, 180 Lumen, E12, Warm Glow
	3.5W	457242 (9290011668)	Candle, 2700K, 180 Lumen, E12, Warm Glow
	4.5W	454371	PAR16, 3000K, 315 Lumens
	4.5W	9290002439	Candle, Warm White, 2700K, 320 Lumen, E26 base, Post Light
	4.5W	457119 (9290011673)	Candle, 330Lm, E26
	4.5W	457168 (9290011672)	G16.5, 330 Lm, E26
	4.5W	457184 (9290011670)	Candle, 330Lm, E12
	6W	9290002242	MR16, 3000K, 300 Lumen, GU10 base
	6.5W	9290011347 (455741)	A19, Warm Glow, 450 Lumen
	7W	9290002706	A19 SlimStyle, Daylight, 5000K, 450 Lumen, E26
	8W	9290002267	A19, 2700K, 470 Lumen
	8W	9290002295	A19, 5000K, 470 Lumen
	8W	9290002329	PAR20, 3000K, 470 Lumen, E26
	8W	9290002330	PAR20
	8W	9290002331	PAR20
	8W	9290002332	PAR20
	8W	9290002333	PAR20
	8W	9290002334	PAR20
	8W	9290002335	PAR20
	8.5W	9290002543	BR30, 5000K, 730 Lumen, 8.5W
	8.5W	9290011116	BR30, 5000K, 730 Lumen, E26
	9W	9290011346 (455873)	A19, Daylight, 5000K, 800 Lumen, E26
	9.5W	9290011117	BR30, 2700K, 730 Lumen, WarmGlow to 2200K (Nov 2014 or later)
	9.5W	455840 (9290011345)	A19, Soft White, 2200-2700K, 800 Lumen, E26
	9.5W	9290011118 (452359)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452383)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452417)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452441)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452466)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
9.5W	9290011119 (452482)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE	
10W	458828 (9290011816)	A19, 2700K, 800 Lumen, 60WE, E26	
10W	459339 (9290011898)	G25, 2700K, 800 Lumen, E26	
10.5W	9290002544	BR30, 2700K, 730 Lumen	
10.5W	9290002707	A19 SlimStyle, Soft White, 2700K, 800 Lumen, 3pk	
11W	9290002268	A19, 2700K, 830 Lumen	
11W	9290002296	A19, 5000K, 830 Lumen	
11W	9290011113	PAR30L, 3000K, ? Lumen, E26	
12W	9290002580 (431392)	BR40, 2700K, 800 Lumen	
13W	9290011120	A21 SlimStyle, 2700K, 1100 Lumen	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description	
Philips	13W	9290002523 13PAR38/F25 3000 DIM AF RO	PAR38, 3000K, 950 Lumen	
	14W	459065	A19, 2700K, 1100Lm, 75WE, E26	
	14W	9290011839	A21, 2700K, 1100 Lumen, E26	
	15W	9290002426	A21, 2700K, 1180 Lumen	
	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26	
	15W	9290011111	PAR38, 3000K, 1050 Lumen, E26, Flood	
	15W	9290011112	PAR38, 5000K, 1050 Lumen, E26, Flood	
	18W	9290011741	A21, 2700K, 1600Lumen, E26	
	18W	459107 (9290011741)	A21, 2700K, 1600 Lumen, E26	
	18W	459115 (9290011741)	A21, 2700K, 1600Lumen, E26	
	18W	459123 (9290011741)	A21, 2700K, 1600Lumen, E26	
	18W	459131 (9290011741)	A21, 2700K, 1600Lumen, E26	
	19W	453340	A19, 2700K, 1620Lm, 100WE, E26	
	19W	9290002473	PAR38, 3000K, 1250 Lumen	
	19W	9290002577 (431395)	PAR38, 1300 Lumen, 25deg flood	
	19W	9290002578 (431403)	PAR38, 1300 Lumen, 35deg flood	
	19.5W	9290002251	PAR38, 3000K, 1210 Lumen	
	19.5W	9290002252	PAR38, 2700K, 1183 Lumen	
	19.5W	9290002253	PAR38, 3000K, 1212 Lumen	
	19.5W	9290002291	PAR38, 4000K, 1207 Lumen	
	19.5W	9290002312	PAR38, 2700K, 1100 Lumen	
	19.5W	9290002313	PAR38, 2700K, 1196 Lumen	
	19.5W	9290002314	PAR38, 3000K, 1200 Lumen	
	19.5W	9290002315	PAR38, 3000K, 1225 Lumen	
	19.5W	9290002316	PAR38, 4000K, 1200 Lumen	
	19.5W	9290002317	PAR38, 4000K, 1245 Lumen	
	19.5W	9290002321	PAR38, 2700K, 1172 Lumen	
	19.5W	9290002322	PAR38, 5000K, 1300 Lumen	
		22W	9290002290	A21, 2700K, 1780 Lumen, Medium base
	Satco	8W	S9140	R20, 2700K, 525 Lumen, E26
8W		S9141	R20, 2700K, 525 Lumen, E26	
8W		S9142	R20, 2700K, 525 Lumen, E26	
8W		S9143	R20, 2700K, 525 Lumen, E26	
10.5W		S9037	A19, 2700K, 810 Lumen, E26	
10.5W		S9038	A19, 3500K, 830 Lumen, E26	
10.5W		S9039	A19, 5000K, 870 Lumen, E26	
11W		S9084	PAR30, 3000K, 780 Lumen, E26, short neck, 25° Beam	
11W		S9085	PAR30, 4000K, 780 Lumen, E26, short neck, 25° Beam	
11W		S9086	PAR30, 3000K, 780 Lumen, E26, short neck, 40° Beam	
11W		S9087	PAR30, 4000K, 780 Lumen, E26, short neck, 40° Beam	
11W		S9088	PAR30, 3000K, 780 Lumen, E26, long neck, 25° Beam	
11W		S9089	PAR30, 4000K, 780 Lumen, E26, long neck, 25° Beam	
11W		S9090	PAR30, 3000K, 780 Lumen, E26, long neck, 40° Beam	
11W		S9091	PAR30, 4000K, 780 Lumen, E26, long neck, 40° Beam	
13W		S9410	PAR30S, 2700k, 950 Lumen, E26	
13W		S9415	PAR30S, 2700k, 950 Lumen, E26	
13W		S9439	PAR30S, 2700k, 950 Lumen, E26	
15W		S9440	PAR38, 2700k, 1100 Lumen, E26	
15W		S9445	PAR38, 2700k, 1100 Lumen, E26	
15W		S9454	PAR38, 2700k, 1100 Lumen, E26	
17W		S8977-S8979	PAR38	
17W		S8984-S8986	PAR38	
17W	S9092	PAR38, 3000K, 1200 Lumen, E26, 25° beam		

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Satco	17W	S9093	PAR38, 4000K, 1200 Lumen, E26, 25° beam
	17W	S9094	PAR38, 3000K, 1200 Lumen, E26, 40° beam
	17W	S9095	PAR38, 4000K, 1200 Lumen, E26, 40° beam
Solais	7W	LRP20/25/27K	PAR20, 2700K, 475 Lumen, E26, 25° Beam
	7W	LRP20/25/30K	PAR20, 3000K, 500 Lumen, E26, 25° Beam
	7W	LRP20/40/27K	PAR20, 2700K, 475 Lumen, E26, 40° Beam
	7W	LRP20/40/30K	PAR20, 3000K, 500 Lumen, E26, 40° Beam
	11W	LR20/25/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, narrow flood
	11W	LR20/25/30K/750	PAR20, 3000K, 750 Lumen, E26, narrow flood
	11W	LR20/40/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, wide flood
	11W	LR20/40/30K/750/xx	PAR20, 3000K, 750 Lumen, E26, wide flood
	16W	LR30/10/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 10° Beam
	16W	LR30/10/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 10° Beam
	16W	LR30/10/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 10° Beam
	16W	LR30/15/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 15° Beam
	16W	LR30/15/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 15° Beam
	16W	LR30/15/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 15° Beam
	16W	LR30/25/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 25° Beam
	16W	LR30/25/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 25° Beam
	16W	LR30/25/30K/1200/WH	PAR30, 3000K, 1200 Lumen, E26, short neck, 25° Beam
	16W	LR30/40/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 40° Beam
	16W	LR30/40/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 40° Beam
	16W	LR30/40/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 40° Beam
	16W	LRP38/25/27K	PAR38, 2700K, 1025 Lumen, E26, 25° Beam
	16W	LRP38/25/30K	PAR38, 3000K, 1100 Lumen, E26, 25° Beam
	16W	LRP38/40/27K	PAR38, 2700K, 1025 Lumen, E26, 40° Beam
16W	LRP38/40/30K	PAR38, 3000K, 1100 Lumen, E26, 40° Beam	
20W	LR38/25/30K/1450/SL	PAR38, 3000K, 1450 Lumen, E26, 15° Beam	
28W	LR38/15/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W	LR38/15/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
28W	LR38/25/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W	LR38/25/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
28W	LR38/40/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W	LR38/40/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
Switch	10W	A260FUS27B1	A19, 800 Lumen
Sylvania	6W	79643	A19, Soft White, 2700K, 450 Lumen, E26, clear
	6.5W	79162 (LED6.5A19/DIM/O/850/G5)	A19, 5000K, 450 Lumen, E26
	6.5W	79163 (LED6.5A19/DIM/O/850/G5)	A19, 2700K, 450 Lumen, E26
	7W	75169	G25, 475 Lumen, E26
	7W	75170	G25, 475 Lumen, E26
	7W	75180	G25, 475 Lumen, E26
	7W	79120	PAR20, 2700K, 500 Lumen, E26
	7W	LED7A19/DIM/O/SE/830 (78214)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
	7W	LED7A19/DIM/O/SE/830/RP (78213)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
	7W	LED7PAR20/DIM/830/FL30 (78785)	PAR20, 3000K, 450 Lumen, E26, 30° Beam
	7W	LED7PAR20/DIM/830/FL30/RP (79094)	PAR20, 3000K, 450 Lumen, E26, 30° Beam
	8W	70419-6	4" Downlight, 600 Lumen, retrofit kit
	8W	70459-3	4" Downlight, 600 Lumen, retrofit kit
	8W	70643-3	4" Downlight, 600 Lumen, retrofit kit
	8W	73193-1	4" Downlight, 600 Lumen, retrofit kit
	8W	LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26
	8W	LED8PAR16/DIM/930/FL36/P/LW	PAR16, Soft White, 390 Lumen

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Sylvania	8W	LED8PAR16/GU10/DIM/930/FL36/RP	PAR16, GU10, Soft White, 390 Lumen
	8W	LED8R20/DIM/SE/830/RP	R20, Soft White, 2700K to 2000K, 520 Lumen
	10W	71707-3	5/6" Downlight, 3000K, 700 Lumen, E26
	10W	73157-0	5/6" Downlight, 4100K, 700 Lumen, E26
	10W	73157-1	5/6" Downlight, 4100K, 700 Lumen, E26
	10W	73159-0	5/6" Downlight, 5000K, 700 Lumen, E26
	10W	73159-1	5/6" Downlight, 5000K, 700 Lumen, E26
	10W	73194-0	5/6" Downlight, 2700K, 700 Lumen, E26
	10W	73394 (LEDRT56700827FL80)	5/6" Downlight, 2700K, 700 Lumen, E26
	10W	73394-1	5/6" Downlight, 2700K, 700 Lumen, E26
	10W	73395-1	5/6" Downlight, 3000K, 700 Lumen, E26
	10W	73398-1	5/6" Downlight, 2700K, 700 Lumen, E26
	10W	LED/600/RT4/830/FL80/RP	Recessed lighting kit, 3000K, 600 Lumen
	10W	LED/RT4/600/827/FL80	Recessed lighting kit, 2700K, 600 Lumen
	10W	LED/RT6/700/830/SE/1PK (73195-0)	6" Downlight, 3000K, 700 Lumen, E26, Retro-fit
	10W	LED10A19/DIM/0/SE/830	A19, 3000K, 800 Lumen
	10W	LED10A19/DIM/0/SE/830/RP (78215)	A19, 3000K, 800 Lumen
	10.5W	LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE
	11W	73195-0	Downlight
	11W	73497-0	Downlight
	11W	79654 (LED11BR30DIMSE830G3RP[LW])	BR30, 3000K, 800 Lumen, E26
	11W	79657 (LED11BR30/DIM/SE/830/G3)	BR30, 3000K, 800 Lumen, E26
	11W	79660 (LED11BR30DIMSE830G3RP)	BR30, 3000K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3 (78413)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (78415)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (79121)	BR30, 2700K, 800 Lumen, E26
	12W	72578 (LEDRT56700927FL80CEC)	5/6" Downlight, 2700K, 900 Lumen, GU24
	12W	72579-0	5/6" Downlight, 3000K, 900 Lumen, GU24
	12W	72593-0	5/6" Downlight, 4000K, 900 Lumen, GU24
	12W	LED12BR30/DIM/HO/827	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/HO/827/HVP	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/SE/830/RP	BR30, Soft White, 2700K to 2000K, 850 Lumen
	13W	73397-1	5/6" Downlight, 3000K, 900 Lumen, E26

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description	
Sylvania	13W	73422-1	5/6" Downlight, 3000K, 900 Lumen, E26	
	13W	73675-0	4/5/6" Downlight, 3000K, 900 Lumens, E26	
	13W	73676-0	4/5/6" Downlight, 3000K, 900 Lumens, E26	
	13W	LELD900830FL120	4/5/6" Downlight, 3000K, 900 Lumens, E26	
	14W	74031 (LED14PAR38DIM850FL40GL1WRP)	PAR38, 5000K, 1050 Lumen, E26	
	14W	74032 (LED14PAR38DIM830NFL25GL1W)	PAR38, 3000K, 1050 Lumen, E26	
	14W	74034 (LED14PAR38DIM830FL40GL1W)	PAR38, 3000K, 1050 Lumen, E26	
	14W	74035 (LED14PAR38DIM830NFL25GL1W)	PAR38, 3000K, 1050 Lumen, E26	
	14W	74036 (LED14PAR38DIM830WSP15GL1W)	PAR38, 3000K, 1050 Lumen, E26	
	14W	74037(LED14PAR38DIM827FL40GL1W)	PAR38, 2700K, 1050 Lumen, E26	
	14W	74065 (LED14PAR38DIM850FL40GL1WRP)	PAR38, 5000K, 1050 Lumen, E26	
	14W	74066 (LED14PAR38DIM830FL40GL1WRP)	PAR38, 3000K, 1050 Lumen, E26	
	14W	74067 (LED14PAR38DIM830FL40GL1WRP)	PAR38, 3000K, 1050 Lumen, E26	
	14W	LED14PAR38/DIM/830/FL40/W	PAR38, 3000K, 1050 Lumen, E26, Flood, 90WE	
	14W	LED14PAR38/DIM/850/FL40WRP	PAR38, 5000K, 1050 Lumen, E26, Flood, 90WE	
	15W	79655 (LED15BR40DIMSE830G3RP [LW])	BR40, 3000K, 1100 Lumen, E26	
	15W	79661 (LED15BR40DIMSE830G3RP)	BR40, 3000K, 1100 Lumen, E26	
	15W	LED15BR40/DIM/HO/827/G3/RP	BR40, Soft White, 2700K, 1100 Lumen, E26, Flood	
	15W	LED15BR40/DIM/SE/830/G3	BR40, 3000K, 1100 Lumen, E26,	
	16W	LED16BR40DIMHO827	BR40, 2700K, 1100Lumen	
	17W	LED17PAR30LN/DIM/830/WSP15/P	PAR30, 3000K, 1200 Lumen, E26, spot	
	17W	LED17PAR30LN/DIM/830/WSP20	PAR30, 3000K, 1200 Lumen, E26, wide spot	
	20W	LED20PAR38/DIM/930/FL40/P2	PAR38, 3000K, 1000 Lumen,	
	20W	LED20PAR38DIM830FL40	PAR38, 3000K, 1300 Lumen	
	21W	LED21/PAR38/DIM/P/930/FL30/HVP	PAR38, Warm White, 3000K, 1100 Lumen, E26, 21W	
	TCP	12W	LED12P30D27KNFL	PAR30,2700K,800 Lumen,E26
		17W	LED17BR40D27K (LED17BR40D)	BR40, 2700K, 1200 Lumen, E26
		17W	LED17HOP38D27KNFL (LED17P38D1) [†]	PAR38, 2700K, 1550 Lumen, E26, Narrow Flood
17W		LED17P38D24KNFL	PAR38, 2400K, 1105 Lumen, E26	
Toshiba	13W	LDRB1327WE6USD2 (13BR40/27K-T)	BR40, 2700K, 950 Lumen	

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Toshiba	13W	LDRB1340WE6USD2 (13BR40/40L-T)	BR40, 4000K, 1050 Lumen
	3W	LG161/2DM/IF/LED [†]	G16.5, Warm White, 3000K, 200 Lumen, E12 base, frosted
	4.5W	LR14DMLED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	4.8W	LA15DM/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, clear
	4.8W	LA15DM/IF/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, frosted
	4.8W	LA15DMC/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LCFFDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E12 base, frosted flame tip
	4.8W	LEFCDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E26 base, clear flame tip
	4.8W	LG161/2DM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LG161/2DM/IF/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, frosted
	4.8W	LGMDM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E26, clear
	5.5W	LMR16GU10DMLEDG2	MR16, 2700K, 350 Lumen, GU10, Flood
	6.5W	LMR16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	LMR16DMGU10 [†]	MR16, GU10 base
	6.5W	LR16DMLED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	LA19DM/GU24/LED	A19, 3000K, GU24
	7.5W	LA19DM/LED	A19, 3000K, 450 Lumen, E26
	7.5W	R20/DM/5K/LED	R20, 450 Lumen, E26
	8W	BPCER20/927/LED	R20, 450 Lumen, E26
	8W	LA19DM/5K/LED	A19, 5000K
	8W	LCFCDM500LED [†]	Candle, 3000K, 500 Lumen, E12 candle base
	8W	LG25DM/LEDG2 [†]	G25, Warm White, 3000K, 510 Lumen, E26
	8W	LR20DM/LED	R20, 2700K, 450 Lumen (90mA ridged reflector version)
	8W	LR20DMLEDG2	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	8W	R20/927/LED	R20, 450 Lumen, E26
	8W	R20/DM/LEDG2	R20, 450 Lumen, E26
	8W	R20DM/LEDG2/CAN	R20, 450 Lumen, E26
	8.5W	LMR16DMGU10/500/LED	MR16, Warm White, 3000K, 520 Lumen, GU10, 120V
	8.5W	LPAR20LEDG72	PAR20, 500 Lumen, 2PK
	9W	LR20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9W	R20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9.5W	AGOM800/5K/LED/CAN	A19, 810 Lumen, E26
	9.5W	AGOM800/927/LED	A19, 810 Lumen, E26
9.5W	AGOM800/927/LED/CAN	A19, 810 Lumen, E26	
9.5W	AGOM800/LED/3/CAN	A19, 800 Lumen, E26	
9.5W	AGOM800/LED/CAN	A19, 800 Lumen, E26	
9.5W	BPAGOM800/5K/LED	A19, 810 Lumen, E26	
9.5W	BPAGOM800/LED	A19, 800 Lumen, E26	
9.5W	BPAGOM800/LED/TAR	A19, 800 Lumen, E26	
9.5W	BPAGOM800/LED/TV	A19, 800 Lumen, E26	
9.5W	BPCEAG800/927/LED/3	A19, 810 Lumen, E26	
9.5W	LPAR20/5K/LEDG5	PAR20, 5000K, 500 Lumen	
9.5W	LPAR20/LEDG5	PAR20, 3000K, 450 Lumen	
9.5W	LPAR20DM/SP/LED	PAR20, 3000K, 465 Lumen, Spot	
9.8W	LA19DM/800/LED/G2	A19, 3000K, 800 Lumen	
10W	LA19DM/800/5K/LEDG2	A19, 5000K	
10W	LA19DM/800/LEDG2	A19, 3000K, 800 Lumen	
11W	DLS02-41127D1E-WF1	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
12W	LPAR30L/LEDG7/2	PAR30L, 3000K, 800 Lumen, E26, long neck, 2PK	
13W	BPCEBR30/927/LED	BR30, 750 Lumen, E26	
Utilitech			

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggle[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Utilitech	13W	BR30/927/LED	BR30, 750 Lumen, E26
	13W	BR30/927/LED/CAN	BR30, 750 Lumen, E26
	13W	BR30/DM/LEDG2	BR30, 750 Lumen, E26
	13W	BR30DM/LED/CAN	BR30, 750 Lumen, E26
	13W	DLS02-61327D1E-WF1	5" or 6" Downlight, Soft White, 2700K, 800 Lumen, E26 retrofit
	13W	DLS02-61350D1E-WF1	5" or 6" Downlight, Daylight, 5000K, 800 Lumen, E26 retrofit
	13W	DLS03-06E30D1E-WH-F1	Downlight 3000K 700 Lumens 65WE
	13W	LBR30DM/LEDG2	BR30
	13.5W	LA19/OM800/LED	A19, 3000K, 800 Lumen, Omni Directional
	15W	15PAR30L/LEDG5	PAR30, 3000K, 790 Lumen, E26
	15W	BPCEPAR30/930/LED	PAR30, 3000K, 770 Lumen, E26
	15W	LBR30HO/LED/G2	BR30, Soft White, 1150 Lumen
	15W	LPAR30L/5K/LEDG5	PAR30, 5000K, 800 Lumen, long neck flood
	15W	LPAR30L/LEDG5	PAR30, 3000K, 790 Lumen, long neck flood
	15W	LPAR30LDM/SP/LED	PAR30, 3000K, 790 Lumen, long neck, spot
	15W	LPAR30S/LEDG5	PAR30, 3000K, 750 Lumen, short neck flood
	15W	PAR30/S/5K/LEDG5	PAR30, 3000K, 750 Lumen, E26
	15W	PAR30/S/LEDG5	PAR30, 3000K, 750 Lumen, E26
	15W	PAR30L/5K/LEDG5	PAR30, 3000K, 800 Lumen, E26
	15W	PAR30L/930/LED	PAR30, 3000K, 770 Lumen, E26
	15W	PAR30L/LEDG5	PAR30, 3000K, 800 Lumen, E26
	15.5W	BPCEAG1600/827/LED	A19, 1600 Lumen, E26
	16W	AGOM1600/5K/LED/CAN	A19, 1600 Lumen, E26
	16W	AGOM1600/LED/CAN	A19, 1600 Lumen, E26
	16W	BPAGOM1600/5K/LED	A19, 1600 Lumen, E26
	16W	BPAGOM1600/LED	A19, 1600 Lumen, E26
	16W	BPAGOM1600/LED/TAR	A19, 1600 Lumen, E26
	16W	LA19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional
	16W	LBR40DM/LEDG2	BR40, 1065 Lumen, E26
	16W	LBR40DMLEDG2	BR40, 2700K, 1065 Lumen
	16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK
	16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK
	16.5W	PAR38/5K/LEDG5	PAR30, 3000K, 1000 Lumen, E26
	17.5W	YGA08A35-17.5W-827	BR40, 2700K, 1100 Lumen
	18W	BPCEPAR38/930/LED	PAR30, 3000K, 950 Lumen, E26
	18W	PAR38/930/LED	PAR30, 3000K, 950 Lumen, E26
	20W	20PAR38/LEDG5	PAR30, 3000K, 1035 Lumen, E26
	20W	DLS24-06C27D1E-WH-F1	5 or 6" Downlight 2700K 1200 Lumens 90WE
	20W	L20PAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood
	20W	LBR40HO/LED/G2	BR40, Soft White, 1400 Lumen
	20W	LPAR38/5K/LEDG5	PAR38, 5000K, 1000 Lumen, flood
	20W	LPAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood
	20W	LPAR38DM/SP/LED	PAR38, 3000K, 1000 Lumen, Spot
	20W	PAR38/LEDG5	PAR30, 3000K, 950 Lumen, E26
	20.5W	LPAR381400LEDG72	PAR38, 1450 Lumen, 2PK
22W	LA/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen	
22W	LA/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen	
23W	LPAR38/1400/5K/LEDG5	PAR38, 5000K, 1400 Lumen	
23W	LPAR38/1400/LEDG5	PAR38, 3000K, 1400 Lumen	
Westinghouse	7W	03098	A19, 3000K, 450 Lumen
	7W	33050	R20, 2700K, 550 Lumen, flood
	17W	33014	PAR38, 3000K, 1200 Lumen, flood
	17W	33064	PAR38, 3000K, 1200 Lumen, flood

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Earthmate	5W	E05129LW	Candle
	5W	8TC05	Candle, (ES5CCDF052, ES9CCDF052)
	5W	8TC05F	Candle, Torpedo Tip, 2700K, 200 Lumen
	5W	8TFC05F	Candle, Flame Tip, 2700K, 200 Lumen
EcoSmart	11W	BPESL11R20/DM/ESM	R20, Soft White
	14W	40114	Spiral, Soft White (ES5M814DIM2, ES9M814DIM2)
	14W	2R2014DIM	R20, 2700K, 410 Lumen
	15W	2R3015DIM	R30 Flood, Soft White (ES5R315DIM2)
	15W	2R3015DIM35K	R30 Flood, Bright White (ES5R315DIM35K)
	15W	2R3015DIM50K	R30 Flood, Daylight (ES5R315DIM250K)
	23W	40123	Spiral, Soft White (ES5M823DIM2)
	Feit	11W	BPESL11R20/DM
13W		LBP13T2C/DM	Spiral, Candelabra base
15W		BPESL15T/DM	Spiral
23W		BPESL23R40/DIM [†]	R40
23W		BPESL23T/DM	Spiral
GE	14W	FLE14HT3/2/DM/SW [†]	Spiral
	26W	FLE26/2/DVR/40	R40
	26W	FLE26HT3/2/DV/SW	Spiral
Philips	16W	EL/A R30 Dim 16W [†]	CFL, R30
	20W	EL/A R40 Dim 20W	R40
Sylvania	5W	CF5EL/B10/827/L/DIM	Candle
	5W	CF5EL/B10C/DIM/827/ADP	Candle
	5W	CF5EL/DEC/DIM	Candle
	14W	CF14EL/R20/DIM [†]	R20
	14W	CF14EL/TWIST/DIM [†]	Spiral
TCP	24W	CF24EL/TWIST/DIM [†]	Spiral
	3W	8T03CL	Candle Clear
	5W	8TC05F	Candle
	5W	8TFC05F	Candle, flame tip
	8W	8A08WH	A-bulb
	14W	40114	Spiral
	14W	2R2014DIM	R20, 2700K, 410 Lumen
	14W	4R2014TD	R20, TruDim, 2700K
	14W	4R2014TD30K	R20, TruDim, 3000K
	14W	4R2014TD35K	R20, TruDim, 3500K
	14W	4R2014TD41K	R20, TruDim, 4100K
	14W	4R2014TD50K	R20, TruDim, 5000K
	14W	4R2014TD65K	R20, TruDim, 6500K
	15W	2R3015DIM	R30, Soft White, 2700K
	16W	4R3016TD	R30, TruDim, 2700K
	16W	4R3016TD30K	R30, TruDim, 3000K
	16W	4R3016TD35K	R30, TruDim, 3500K
	16W	4R3016TD41K	R30, TruDim, 4100K
	16W	4R3016TD50K	R30, TruDim, 5000K
	16W	4R3016TD65K	R30, TruDim, 6500K
Utilitech	23W	10123	Spiral
	23W	40123	Spiral
	11W	LBP11R20DM	R20, Soft White, 2700K
	15W	LBP15TDM	Spiral
	23W	LBP23R40DM	R40
	23W	LBP23TDM	Spiral

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for C•L lamp dimmers

Credeza[®] C•L: TTCL-100H

Maximum wattage controlled: 100W



Brand	Wattage	Model	Description
Cree	6W	BA19-04527OMF-12DE26-1U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04527OMF-12DE26-2U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04550OMF-12DE26-2U500	A19, 5000K, 450 Lumen, 40WE, 4pk
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W
	18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W
Feit	6.5W	R16DM/LED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	10W	BPAG800/5K/LED	A19, 5000K
	10W	BPAG800/LED	A19, 3000K, 800 Lumen
	22W	A/OM1600R/27K/LED	A21, 2700K, 1600 Lumen
	22W	A/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen
GE	22W	A/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen
	10.5W	FAM45LED11DAV3H	A19, 2700K, 800 Lumens, E26, 2pk
Philips	14W	LED14DA21V2/827W	A21, 2700K, 1100 Lumen, E26
	15W	9290002426	A21, 2700K, 1180 Lumen
Switch	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26
	10W	A260FUS27B1	A19, 800 Lumen
Sylvania	13W	75FU202	A19, 3000K, 1100 Lumen, E26
	8W	LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26
	10.5W	LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE
Utilitech	10.5W	LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE
	6.5W	LR16DMLED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	R20/DM/5K/LED	R20, 450 Lumen, E26
	8W	BPCER20/927/LED	R20, 450 Lumen, E26
	8W	R20/927/LED	R20, 450 Lumen, E26
	8W	R20/DM/LEDG2	R20, 450 Lumen, E26
	8W	R20DM/LEDG2/CAN	R20, 450 Lumen, E26
	9.8W	LA19DM/800/LED/G2	A19, 3000K, 800 Lumen
	10W	LA19DM/800/5K/LEDG2	A19, 5000K
	10W	LA19DM/800/LEDG2	A19, 3000K, 800 Lumen
	15.5W	BPCEAG1600/827/LED	A19, 1600 Lumen, E26
	16W	AGOM1600/5K/LED/CAN	A19, 1600 Lumen, E26
	16W	AGOM1600/LED/CAN	A19, 1600 Lumen, E26
	16W	BPAGOM1600/5K/LED	A19, 1600 Lumen, E26
	16W	BPAGOM1600/LED	A19, 1600 Lumen, E26
16W	BPAGOM1600/LED/TAR	A19, 1600 Lumen, E26	
22W	LA/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen	
22W	LA/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen	

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for C•L lamp dimmers

Credenza[®] C•L: TTCL-100H

Maximum wattage controlled: 100W



Brand	Wattage	Model	Description
EcoSmart	14W	40114	Spiral, Soft White (ES5M814DIM2, ES9M814DIM2)
	23W	10123	Spiral
	23W	40123	Spiral, Soft White (ES5M823DIM2)
Feit	15W	BPESL15T/DM	Spiral
	23W	BPESL23T/DM	Spiral
Litetronics	5W	MB-500D	A19
	5W	MB-500DL	A19
	8W	MB-800D	A19
	8W	MB-800DL	A19
	11W	MB-15527D	Post Light
Philips	27W	L-27527D	Spiral
	15W	EL/mdt DIM 15W	Spiral
	20W	EL/mdt DIM 20W	Spiral
Sylvania	32W	EL/dt Dim 32W	Spiral
	14W	CF14EL/TWIST/DIM	Spiral
TCP	24W	CF24EL/TWIST/DIM	Spiral
	14W	40114	Spiral
	23W	10123	Spiral
Utilitech	23W	40123	Spiral
	15W	LBP15TDM	Spiral
	23W	LBP23TDM	Spiral

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro Wireless[®] C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
Commercial Electric	12W	CER6730Axx	Downlight, 670 Lumen, E26 retro fit kit	
	6W	BA19-04527OMB-12DE26-3_1	A19 4Flow, 83CRI, 2700K, 460 Lumen, E26	
	6W	BA19-04527OMF-12DE26-3U100	A19 4Flow, 2700K, 460 Lumen, E26	
	6W	BA19-04550OMB-12DE26-3_1	A19 4Flow, 83CRI, 5000K, 460 Lumen, E26	
	6W	BA19-04550OMF-12DE26-3U100	A19 4Flow, 5000K, 460 Lumen, E26	
	9.5W	BA19-08027OMF-12DE26-2U100	A19, Soft White, 2700K, 800 Lumen, Medium base	
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk	
	9.5W	BBR30-06527FLF-12DE26-1U100	BR30, 650 Lumen, Soft White, 2700K	
	9.5W	BBR30-06550FLF-12DE26-1U100	BR30, Daylight, 5000K 650 Lumen, 9.5W	
	9.5W	BBR40-07627FLF-12DE26-1U_00	BR40, 2700K, 760 Lumen, Flood	
	9.5W	BBR40-07650FLF-12DE26-1U10	BR40, 5000K, 760 Lumen, Flood	
	10W	BA19-08027OMB-12DE26-3_1	A19, 4Flow, 2700K, 815 Lumen, E26, 83 CRI	
	10W	BA19-08050OMB-12DE26-3_1	A19, 4Flow, 5000K, 815 Lumen, E26, 83 CRI	
	Cree	10.5W	BPAR30L-0853025C-12DE26-1C100	PAR30L, 3000K, 850 Lumen, 25° Spot
		10.5W	BPAR30L-0853040C-12DE26-1C100	PAR30L, 3000K, 850 Lumen, 40° Flood
		10.5W	BPAR30S-0853040C-12DE26-1C100	PAR30S, 3000K, 850 Lumen, 40° Flood
		11.5W	DRDL4-05727009-12DE26-1C100	4" Downlight, 2700K TW, 575 Lumen, E26 retrofit
		12.5W	DRDL6-06227009-12DE26-1C100	6" Downlight, 2700K TW, 625 Lumen, E26 retrofit
12.5W		DRDL6-06250009-12DE26-1C100	6" Downlight, 5000K TW, 625 Lumen, E26 retrofit	
15W		DRDL6-11027009-12DE26-1C100	6" Downlight, 2700K, 1100 Lumen	
16.5W		BPAR38-1503027T-12DE26-2U_00	PAR38, 3000K, 1510Lm, E26, Spot	
16.5W		BPAR38-1503047T-12DE26-2U_00	PAR38, 3000K, 1510Lm, E26, Flood	
18W		BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W	
18W		BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W	
18W		BPAR38-1503027T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 27 deg spot	
18W		BPAR38-1503047T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 47 deg flood	
EcoSmart		5W	5020001XXYY	Candle, 2700K, 350 Lumens
		5.5W	5bHPR500STW1D18	PAR20, 3000K 450Lm, E26
		5.5W	5bHPR500STW1D19	PAR20, 5000K 470Lm, E26
		6.5W	50217013006	PAR20, 3000K, 450 Lumens
		7W	ECS BR20 50WE CW 120 G1 BL	BR20, Daylight, 5000K, 525 Lumen, E26
	7.5W	BPA15/CL/500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E26	
	7.5W	BPA15C/CL500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E12	
	7.5W	BPCFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E12	
	7.5W	BPEFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E26	
	7.5W	BPGM/CL/500/LED/ESM	G16.5, Soft White, 2700K, 500 Lumen, E26	
	9W	5bSA800STQ1D02	A19, 3000K, 800Lm, E26, 4pk	
	9W	A810SS-Q1D-01 (5bSA800STQ1D01)	A19, 2700K, 800Lm, E26	
	9W	A810SS-Q1D-04 (5bSA800STQ1D03)	A19, 5000K, 840Lm, E26, 4pk	
	9.5W	5bHPR650STW1D29	PAR30, 3000K, 650Lm, E26	
	9.5W	5bHPR650STW1D30	PAR30, 3000K, 680Lm, E26	
	9.5W	ECS DN4 CW E26 120	4" Downlight, Daylight, 5000K, 650 Lumen, E26, retrofit	
	9.5W	ECS DN4 CW GU24 120	4" Downlight, Daylight, 5000K, 650 Lumen, GU24 base, retrofit	
	9.5W	ECS DN4 W27 E26 120	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
	9.5W	ECS DN4 W27 GU24 120	4" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit	
	9.5W	ECS DN6 CW GU24 120	6" Downlight, Daylight, 5000K, 650 Lumen, GU24 base, retrofit	
	9.5W	ECS DN6 W27 E26 120	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
	9.5W	ECS DN6 W27 E26 120 2BX	6" Downlight, Soft White, 2700K, E26 retrofit, 2pk	
9.5W	ECS DN6 W27 E26 120 BX V3	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit		
9.5W	ECS DN6 W27 GU24 120	6" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit		
10W	DL-N14A10FR1-27	5/6" Downlight, 2700K, 650Lm, E26		
10W	DL-N14A10FR1-50	5/6" Downlight, 5000K, 650Lm, E26		
10W	DL-N14A10FR2-27	5/6" Downlight, 2700K, 650Lm, GU24		

† Requires a minimum of 2 lamps

† † Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro Wireless[®] C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
EcoSmart	10W	DL-N14A10FR2-50	5/6" Downlight, 5000K, 650Lm, GU24
	11W	5020901XXYY	BR30, 2700K, 770 Lumens
	13W	5bHPR1000SW1D19	PAR38, 3000K, 900Lm, E26
	13W	5bHPR1000SW1D20	PAR38, 5000K, 1000Lm, E26
	4.5W	R14DM/LED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	4.9W	BPCEFC/927/LED/3	Candle, 2700K, 330 Lumen, E12
	6.5W	BPMPR16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	MR16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	R16DM/LED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	8W	BPCEG25/927/LED/3	G25, 2700K, 495 Lumen, E26
	8.5W	BR30M65/LED/6	R30, 650 Lumen, E26
	9.7W	CELEDRT4/927	4" Downlight, 2700K, 520 Lumen, E26
	9.7W	EDRT4/927	4" Downlight, 2700K, 520 Lumen, E26
	9.7W	LEDR4/827	4" Downlight, 2700K, 520 Lumen, E26
	Feit	9.7W	LEDR4/830
9.7W		LEDR4/850	4" Downlight, 5000K, 520 Lumen, E26
9.7W		LEDRT4/927	4" Downlight, 2700K, 520 Lumen, E26
9.7W		LEDRT4/940	4" Downlight, 4000K, 520 Lumen, E26
13W		BPCEBR30LED	BR30
13.5W		A19/OM800/5K/LED [†]	A19, 5000K, Omni Directional
13.5W		A19/OM800/LED [†]	A19, 3000K, Omni Directional
13.5W		BPCEA19/OM800/LED [†]	A19, Omni Directional
13.5W		BPCEA19/OM800/LED/CAN [†]	A19, Omni Directional
14W		LEDR56/830	Downlight, 3000K, 925 Lumen, retrofit kit
16.8W		LEDR56/3K [†]	5" or 6" Downlight, 3000K, 840 Lumen
17W		BPCEBR40/LED	BR40, 2700K, 1065 Lumen
17W		BR40/DM/LED [†]	BR40, 2700K, 1065 Lumen
20W		20PAR38/LEDG5	PAR38
20W		BPCEPAR38/LEDG5	PAR38
20W		PAR38/5K/LEDG5	PAR38, 5000K
20W		PAR38/5K/LEDG5/CAN	PAR38, 5000K
20W		PAR38/LEDG5	PAR38
20W		PAR38/LEDG5/CAN	PAR38
21.5W		CELEDRT56/927/2	5/6" Downlight, 2700K, 1250 Lumen, E26
21.5W		LEDR56/827	5/6" Downlight, 2700K, 1250 Lumen, E26
21.5W		LEDR56/927/MP/4	5/6" Downlight, 2700K, 1250 Lumen, E26, 4 pack
21.5W		LEDR56HO/830	5/6" Downlight, 3000K, 1250 Lumen, E26
21.5W		LEDR56HO/850	5/6" Downlight, 5000K, 1250 Lumen, E26
GE		10.5W	FAM45LED11DAV3H
	11W	LED11DA19RVL/TP	A19, 2700K, 570 Lumen
	11W	LED11DA19V2	A19, 2700K, 800 Lumen
	20W	PAR38FL20/827/LED	PAR38, 2700K, 1150 Lumen Flood
	20W	PAR38FL20/830/LED	PAR38, 3000K, 1200 Lumen Flood
Halco	20W	PAR38FL20/840/LED	PAR38, 4000K, 1250 Lumen Flood
	20W	PAR38FL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
	20W	PAR38NFL20/827/LED	PAR38, 2700K, 1150 Lumen Flood
	20W	PAR38NFL20/830/LED	PAR38, 3000K, 1200 Lumen Flood
	20W	PAR38NFL20/840/LED	PAR38, 4000K Flood
	20W	PAR38NFL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
	20W	PAR38SP20/827/LED	PAR38, 2700K, 1150 Lumen Spot
	20W	PAR38SP20/830/LED	PAR38, 3000K, 1200 Lumen Spot
	20W	PAR38SP20/840/LED	PAR38, 4000K Spot
	20W	PAR38SP20/850/LED	PAR38, 5000K, 1300 Lumen Spot
Halo	12.2W	SLD405830WHR [†]	4" Downlight, 3000K, 650 Lumen, E26 kit
	12.2W	SLD405xxxx [†]	4" Downlight, 710-800 Lumen, 12W to 12.2W

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro Wireless® C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Halo	12.2W	SLD606830WHR†	5"/6" Downlight, 3000K, 675 Lumen, E26 kit
	12.2W	SLD606xxxx†	5"/6" Downlight, 780-800 Lumen, 12.2W to 13.2W
	13.2W	SLD606927WH	6" Downlight, 2700K, 780 Lumen
	13.2W	SLD606927WHJB	6" Downlight, 2700K, 780 Lumen
	13.2W	SLD606927WHR	6" Downlight, 2700K, 780 Lumen
	13.2W	SLD606930WH	6" Downlight, 3000K, 780 Lumen
	13.2W	SLD606930WHJB	6" Downlight, 3000K, 780 Lumen
	13.2W	SLD606930WHR	6" Downlight, 3000K, 780 Lumen
	13.2W	SLD606935WH	6" Downlight, 3500K, 780 Lumen
	13.2W	SLD606935WHJB	6" Downlight, 3500K, 780 Lumen
	13.2W	SLD606940WH	6" Downlight, 4000K, 780 Lumen
	13.2W	SLD606940WHJB	6" Downlight, 4000K, 780 Lumen
	14.8W	SLD612827WHUNVJB	6" Downlight, 2700K, 1100 Lumen, E26
	14.8W	SLD612830WHUNVJB	6" Downlight, 3000K, 1150 Lumen, E26
	14.8W	SLD612835WHUNVJB	6" Downlight, 3500K, 1200 Lumen, E26
	14.8W	SLD612840WHUNVJB	6" Downlight, 4000K, 1215 Lumen, E26
	14.8W	SLD612927WHUNVJB	6" Downlight, 2700K, 880 Lumen, E26
	14.8W	SLD612930WHUNVJB	6" Downlight, 3000K, 925 Lumen, E26
	14.8W	SLD612935WHUNVJB	6" Downlight, 3500K, 965 Lumen, E26
	14.8W	SLD612940WHUNVJB	6" Downlight, 4000K, 1000 Lumen, E26
Liteline	7W	G4-P16LED7W-30KFL-ES	PAR16, 3000K, 450 Lumen, E26
	7W	G4-P16LED7W-30KSP	PAR16, 3000K, 450 Lumen, E26
	7W	G4-P16LED7W-40KFL	PAR16, 4000K, 450 Lumen, E26
	7W	G4-P16LED7W-40KSP	PAR16, 4000K, 450 Lumen, E26
	10W	G4-P30LLED10W-27KFES	PAR30L, 2700K, 800 Lumen, E26
	10W	G4-P30LLED10W-27KSES	PAR30L, 2700K, 800 Lumen, E26
	10W	G4-P30LLED10W-30KFES	PAR30L, 3000K, 800 Lumen, E26
	10W	G4-P30LLED10W-30KSES	PAR30L, 3000K, 800 Lumen, E26
	10W	G4-P30LLED10W-40KFES	PAR30L, 4000K, 800 Lumen, E26
	10W	G4-P30LLED10W-40KSES	PAR30L, 4000K, 800 Lumen, E26
Litetronics	14W	LP14550FL2D†	BR30, 2700K, 925 Lumen
	14W	LP14550FL4D†	BR30, 3000K, 925 Lumen
	14W	LP14550FL6D†	BR30, 4000K, 925 Lumen
Megaman	3.2W	LC1503.2DCS-E12-27K	B10, 2700K, 250Lm, E12
Osram	13W	73396 (LEDRT56900827FL80)	5/6" Downlight, 2700K, 900 Lumen, E26
Philips	3.5W	9290002417†	Candle, 2700K, 150 Lumen, E12 Candelabra base
	3.5W	9290002419†	Candle, 2700K, 150 Lumen, E26 medium base, blunt tip clear
	3.5W	457226 (9290011668)††	Candle, 2700K, 180 Lumen, E12, Warm Glow
	3.5W	457234 (9290011668)††	Candle, 2700K, 180 Lumen, E12, Warm Glow
	3.5W	457242 (9290011668)††	Candle, 2700K, 180 Lumen, E12, Warm Glow
	4.5W	457119 (9290011673)	Candle, 330Lm, E26
	4.5W	457168 (9290011672)	G16.5, 330 Lm, E26
	4.5W	457184 (9290011670)	Candle, 330Lm, E12
	6W	9290011348	A19, Daylight, 5000K, 450 Lumen, E26
	6W	456995 (9290011557)	R20, 2700K, 450 Lumen, Warm Glow
	6.5W	9290011347 (455741)	A19, Warm Glow, 450 Lumen
	8W	9290002329	PAR20, 3000K, 470 Lumen, E26
	8.5W	9290002543	BR30, 5000K, 730 Lumen, 8.5W
	9.5W	9290011117	BR30, 2700K, 730 Lumen, WarmGlow to 2200K (Nov 2014 or later)
	9.5W	455840 (9290011345)	A19, Soft White, 2200-2700K, 800 Lumen, E26
9.5W	9290011118 (452359)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE	
9.5W	9290011118 (452383)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE	
9.5W	9290011118 (452417)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE	
9.5W	9290011119 (452441)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro Wireless® C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Philips	9.5W	9290011119 (452466)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452482)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	10W	458828 (9290011816)	A19, 2700K, 800 Lumen, 60WE, E26
	10W	459339 (9290011898)	G25, 2700K, 800 Lumen, E26
	10.5W	9290002544	BR30, 2700K, 730 Lumen
	10.5W	9290002707	A19 SlimStyle, Soft White, 2700K, 800 Lumen, 3pk
	11W	9290002268	A19, 2700K, 830 Lumen
	11W	9290002296	A19, 5000K, 830 Lumen
	12W	9290002580 (431392)	BR40, 2700K, 800 Lumen
	13W	9290002523 13PAR38/F25 3000 DIM AF RO	PAR38, 3000K, 950 Lumen
	13W	9290011320 (454736)	PAR38, 2700K, 900 Lumen, E26
	13W	9290011321 (454744)	PAR38, 2700K, 900 Lumen, E26
	13W	9290011322 (454751)	PAR38, 2700K, 900 Lumen, E26
	14W	459065	A19, 2700K, 1100Lm, 75WE, E26
	14W	9290011839	A21, 2700K, 1100 Lumen, E26
	15W	9290002426	A21, 2700K, 1180 Lumen
	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26
	15W	9290011111	PAR38, 3000K, 1050 Lumen, E26, Flood
	15W	9290011112	PAR38, 5000K, 1050 Lumen, E26, Flood
	18W	9290011741	A21, 2700K, 1600Lumen, E26
	18W	459107 (9290011741)	A21, 2700K, 1600 Lumen, E26
	18W	459115 (9290011741)	A21, 2700K, 1600Lumen, E26
	18W	459123 (9290011741)	A21, 2700K, 1600Lumen, E26
	18W	459131 (9290011741)	A21, 2700K, 1600Lumen, E26
	19W	453340	A19, 2700K, 1620Lm, 100WE, E26
	19W	9290002473	PAR38, 3000K, 1250 Lumen
	19W	9290002577 (431395)	PAR38, 1300 Lumen, 25deg flood
	19W	9290002578 (431403)	PAR38, 1300 Lumen, 35deg flood
	19.5W	9290002251	PAR38, 3000K, 1210 Lumen
	19.5W	9290002252	PAR38, 2700K, 1183 Lumen
	19.5W	9290002253	PAR38, 3000K, 1212 Lumen
	19.5W	9290002291	PAR38, 4000K, 1207 Lumen
	19.5W	9290002312	PAR38, 2700K, 1100 Lumen
	19.5W	9290002313	PAR38, 2700K, 1196 Lumen
	19.5W	9290002314	PAR38, 3000K, 1200 Lumen
	19.5W	9290002315	PAR38, 3000K, 1225 Lumen
	19.5W	9290002316	PAR38, 4000K, 1200 Lumen
	19.5W	9290002317	PAR38, 4000K, 1245 Lumen
	19.5W	9290002321	PAR38, 2700K, 1172 Lumen
	19.5W	9290002322	PAR38, 5000K, 1300 Lumen
	22W	9290002290	A21, 2700K, 1780 Lumen, Medium base
	Project Source	10W	DLS22-06B30D1E-WH-1
Satco	8W	S8794	A19, 2700K, 450 Lumen, GU10
	8W	S8995	A19, 3000K, 450 Lumen
	9W	S8991	4" Downlight
	11W	S9084	PAR30, 3000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9085	PAR30, 4000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9086	PAR30, 3000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9087	PAR30, 4000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9088	PAR30, 3000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9089	PAR30, 4000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9090	PAR30, 3000K, 780 Lumen, E26, long neck, 40° Beam
	11W	S9091	PAR30, 4000K, 780 Lumen, E26, long neck, 40° Beam
	13W	S9003	R40, 3000K, 880 Lumen
	13W	S9046	R40, 2700K, 850 Lumen
	13W	S9047	R40, 4000K, 920 Lumen
	13W	S9048	R40, 5000K, 950 Lumen

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro Wireless® C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
Satco	13W	S9410	PAR30S, 2700k, 950 Lumen, E26	
	13W	S9415	PAR30S, 2700k, 950 Lumen, E26	
	13W	S9439	PAR30S, 2700k, 950 Lumen, E26	
	15W	S9440	PAR38, 2700k, 1100 Lumen, E26	
	15W	S9445	PAR38, 2700k, 1100 Lumen, E26	
	15W	S9454	PAR38, 2700k, 1100 Lumen, E26	
	17W	S8977-S8979	PAR38	
	17W	S8984-S8986	PAR38	
	17W	S9092	PAR38, 3000K, 1200 Lumen, E26, 25° beam	
	17W	S9093	PAR38, 4000K, 1200 Lumen, E26, 25° beam	
	17W	S9094	PAR38, 3000K, 1200 Lumen, E26, 40° beam	
	17W	S9095	PAR38, 4000K, 1200 Lumen, E26, 40° beam	
	18W	S9455	PAR38, 3000K, 1400 Lumen, E26, Flood	
	18W	S9456	PAR38, 4000K, 1400 Lumen, E26, Flood	
	Solais	7W	LRP20/25/27K	PAR20, 2700K, 475 Lumen, E26, 25° Beam
		7W	LRP20/25/30K	PAR20, 3000K, 500 Lumen, E26, 25° Beam
7W		LRP20/40/27K	PAR20, 2700K, 475 Lumen, E26, 40° Beam	
7W		LRP20/40/30K	PAR20, 3000K, 500 Lumen, E26, 40° Beam	
11W		LR20/25/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, narrow flood	
11W		LR20/25/30K/750	PAR20, 3000K, 750 Lumen, E26, narrow flood	
11W		LR20/40/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, wide flood	
11W		LR20/40/30K/750/xx	PAR20, 3000K, 750 Lumen, E26, wide flood	
16W		LR30/10/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 10° Beam	
16W		LR30/10/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 10° Beam	
16W		LR30/10/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 10° Beam	
16W		LR30/15/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 15° Beam	
16W		LR30/15/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 15° Beam	
16W		LR30/15/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 15° Beam	
16W		LR30/25/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 25° Beam	
16W		LR30/25/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 25° Beam	
16W		LR30/25/30K/1200/WH	PAR30, 3000K, 1200 Lumen, E26, short neck, 25° Beam	
16W		LR30/40/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 40° Beam	
16W		LR30/40/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 40° Beam	
16W		LR30/40/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 40° Beam	
16W		LRP38/25/27K	PAR38, 2700K, 1025 Lumen, E26, 25° Beam	
16W		LRP38/25/30K	PAR38, 3000K, 1100 Lumen, E26, 25° Beam	
16W		LRP38/40/27K	PAR38, 2700K, 1025 Lumen, E26, 40° Beam	
16W		LRP38/40/30K	PAR38, 3000K, 1100 Lumen, E26, 40° Beam	
20W		LR38/25/30K/1450/SL	PAR38, 3000K, 1450 Lumen, E26, 15° Beam	
28W		LR38/15/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W		LR38/15/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
28W		LR38/25/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W	LR38/25/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26		
28W	LR38/40/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26		
28W	LR38/40/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26		
Switch	13W	75FU202†	A19, 3000K, 1100 Lumen, E26	
Sylvania	6W	79643	A19, Soft White, 2700K, 450 Lumen, E26, clear	
	7W	75169	G25, 475 Lumen, E26	
	7W	75170	G25, 475 Lumen, E26	
	7W	75180	G25, 475 Lumen, E26	
	7W	LED7A19/DIM/0/SE/830 (78214)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect	
	7W	LED7A19/DIM/0/SE/830/RP (78213)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect	
	8W	73193-1	4" Downlight, 600 Lumen, retrofit kit	
	8W	LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26	
	8W	LED8PAR16/DIM/930/FL36/P/LW†	PAR16, Soft White, 390 Lumen	

† Requires a minimum of 2 lamps

† † Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro Wireless[®] C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Sylvania	8W	LED8PAR16/GU10/DIM/930/FL36/RP†	PAR16, GU10, Soft White, 390 Lumen
	8W	LED8R20/DIM/SE/830/RP	R20, Soft White, 2700K to 2000K, 520 Lumen
	9W	79246 (LED9A19DIMO827G5)	A19, 2700K, 800 Lumen, E26
	9W	79247 (LED9A9DIMO827G5)	A19, 2700K, 800 Lumen, E26
	9W	79249 (LED9A19DIMO850RP)	A19, 5000K, 800 Lumen, E26
	9W	79273 (LED9A19DIMO850G5RP)	A19, 5000K, 800 Lumen, E26
	9W	79497 (LED9A19DIMO827G5CC)	A19, 2700K, 800 Lumen, E26
	10W	LED10A19/DIM/O/SE/830	A19, 3000K, 800 Lumen
	10W	LED10A19/DIM/O/SE/830/RP (78215)	A19, 3000K, 800 Lumen
	10.5W	LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE
	11W	73195-0	Downlight
	11W	73497-0	Downlight
	11W	79654 (LED11BR30DIMSE830G3RP[LW])	BR30, 3000K, 800 Lumen, E26
	11W	79657 (LED11BR30/DIM/SE/830/G3)	BR30, 3000K, 800 Lumen, E26
	11W	79660 (LED11BR30DIMSE830G3RP)	BR30, 3000K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3 (78413)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (78415)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (79121)	BR30, 2700K, 800 Lumen, E26
	11W	LED11PAR20/DIM/930/FL30/P2	PAR20, Soft White, 550 Lumen
	12W	72578 (LEDRT56700927FL80CEC)	5/6" Downlight, 2700K, 900 Lumen, GU24
	12W	72579-0	5/6" Downlight, 3000K, 900 Lumen, GU24
	12W	72593-0	5/6" Downlight, 4000K, 900 Lumen, GU24
	12W	74059 (LED13PAR30LN/DIM/850/FL40/GL1/W/RP)	PAR30L, 5000K, 800 Lumen, E26,
	12W	74061 (LED13PAR30LN/DIM/830/FL40/GL1/W/RP)	PAR30L, 3000K, 800 Lumen, E26,
	12W	74062 (LED13PAR30LN/DIM/830/FL40/GL1/W/RP)	PAR30L, 3000K, 800 Lumen, E26,
	12W	78225 (LED13PAR30LN/DIM/850/NFL25/GL1/W)	PAR30L, 5000K, 800 Lumen, E26,
	12W	78226 (LED13PAR30LN/DIM/830/NFL25/GL1/W/RP)	PAR30L, 3000K, 800 Lumen, E26,

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro Wireless[®] C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Sylvania	12W	78227 (LED13PAR30LN/DIM/830/NFL25/GL1/W)	PAR30L, 3000K, 800 Lumen, E26,
	12W	78228 (LED13PAR30LN/DIM/830/FL40/GL1/W)	PAR30L, 3000K, 800 Lumen, E26,
	12W	78229 (LED13PAR30LN/DIM/827/NFL25/GL1/W)	PAR30L, 2700K, 800 Lumen, E26,
	12W	78230 (LED13PAR30LN/DIM/827/FL40/GL1/W)	PAR30L, 2700K, 800 Lumen, E26,
	12W	LED12BR30/DIM/HO/827	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/HO/827/HVP	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/SE/830/RP	BR30, Soft White, 2700K to 2000K, 850 Lumen
	13W	73396 (LEDRT56900827FL80)	5/6" Downlight, 2700K, 900 Lumen, E26
	13W	73396-1	5/6" Downlight, 2700K, 900 Lumen, E26
	13W	73397-0	5/6" Downlight, 3000K, 900 Lumen, E26
	13W	73397-1	5/6" Downlight, 3000K, 900 Lumen, E26
	13W	73397-1	5/6" Downlight, 3000K, 900 Lumen, E26
	13W	73422-1	5/6" Downlight, 3000K, 900 Lumen, E26
	13W	73422-1	5/6" Downlight, 3000K, 900 Lumen, E26
	14W	74031 (LED14PAR38DIM850FL40GL1WRP)	PAR38, 5000K, 1050 Lumen, E26
	14W	74032 (LED14PAR38DIM830NFL25GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74034 (LED14PAR38DIM830FL40GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74035 (LED14PAR38DIM830NFL25GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74036 (LED14PAR38DIM830WSP15GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74037(LED14PAR38DIM827FL40GL1W)	PAR38, 2700K, 1050 Lumen, E26
	14W	74065 (LED14PAR38DIM850FL40GL1WRP)	PAR38, 5000K, 1050 Lumen, E26
	14W	74066 (LED14PAR38DIM830FL40GL1WRP)	PAR38, 3000K, 1050 Lumen, E26
	14W	74067 (LED14PAR38DIM830FL40GL1WRP)	PAR38, 3000K, 1050 Lumen, E26
	14W	LED14PAR38/DIM/830/FL40/W	PAR38, 3000K, 1050 Lumen, E26, Flood, 90WE
	14W	LED14PAR38/DIM/850/FL40WRP	PAR38, 5000K, 1050 Lumen, E26, Flood, 90WE
	15W	79175	BR40, 1100 Lumen
	15W	79176	BR40, 1100 Lumen
	15W	79177	BR40, 1100 Lumen
	15W	79655 (LED15BR40DIMSE830G3RP [LW])	BR40, 3000K, 1100 Lumen, E26
	15W	79661 (LED15BR40DIMSE830G3RP)	BR40, 3000K, 1100 Lumen, E26
	15W	LED15BR40/DIM/SE/830/G3	BR40, 3000K, 1100 Lumen, E26,

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro Wireless[®] C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Sylvania	16W	LED16BR40DIMHO827	BR40, 2700K, 1100Lumen
	17W	LED17PAR30LN/DIM/830/WSP15/P	PAR30, 3000K, 1200 Lumen, E26, spot
	17W	LED17PAR30LN/DIM/830/WSP20	PAR30, 3000K, 1200 Lumen, E26, wide spot
	18W	LED18PAR38/DIM/827/NFL25 [†]	PAR38, 2700K, 860 Lumen
	20W	LED20PAR38/DIM/930/FL40/P2	PAR38, 3000K, 1000 Lumen,
	20W	LED20PAR38DIM830FL40	PAR38, 3000K, 1300 Lumen
TCP	12W	LED12P30D27KNFL	PAR30,2700K,800 Lumen,E26
	17W	LED17BR40D27K (LED17BR40D)	BR40, 2700K, 1200 Lumen, E26
	17W	LED17HOP38D27KNFL (LED17P38D1)	PAR38, 2700K, 1550 Lumen, E26, Narrow Flood
Toshiba	17W	LED17P38D24KNFL	PAR38, 2400K, 1105 Lumen, E26
	13W	LDRB1327WE6USD2 (13BR40/27K-T)	BR40, 2700K, 950 Lumen
Toshiba	13W	LDRB1340WE6USD2 (13BR40/40L-T)	BR40, 4000K, 1050 Lumen
	3W	LG161/2DM/IF/LED	G16.5, Warm White, 3000K, 200 Lumen, E12 base, frosted
Utilitech	4.5W	LR14DMLED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	4.8W	LA15DM/CL/300/LED	A15, Warm White, 3000K, 300 Lumen, E26, clear
	4.8W	LA15DM/IF/300/LED	A15, Warm White, 3000K, 300 Lumen, E26, frosted
	4.8W	LA15DMC/CL/300/LED	A15, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LCFFDM/300/LED	Candle, Warm White, 3000K, 300 Lumen, E12 base, frosted flame tip
	4.8W	LEFCDM/300/LED	Candle, Warm White, 3000K, 300 Lumen, E26 base, clear flame tip
	4.8W	LG161/2DM/CL/300/LED	G16.5, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LG161/2DM/IF/300/LED	G16.5, Warm White, 3000K, 300 Lumen, E12 base, frosted
	4.8W	LGMDM/CL/300/LED	G16.5, Warm White, 3000K, 300 Lumen, E26, clear
	5.5W	LMR16GU10DMLEDG2	MR16, 2700K, 350 Lumen, GU10, Flood
	6.5W	LMR16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	LMR16DMGU10 [†]	MR16, GU10 base
	6.5W	LR16DMLED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	R20/DM/5K/LED	R20, 450 Lumen, E26
	8W	BPCER20/927/LED	R20, 450 Lumen, E26
	8W	LCFCDM500LED [†]	Candle, 3000K, 500 Lumen, E12 candle base
	8W	LG25DM/LEDG2 [†]	G25, Warm White, 3000K, 510 Lumen, E26
	8W	R20/927/LED	R20, 450 Lumen, E26
	8W	R20/DM/LEDG2	R20, 450 Lumen, E26
	8W	R20DM/LEDG2/CAN	R20, 450 Lumen, E26
	8.5W	LMR16DMGU10/500/LED	MR16, Warm White, 3000K, 520 Lumen, GU10, 120V
	8.5W	LPAR20LEDG72	PAR20, 500 Lumen, 2PK
	9W	LR20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9W	R20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9.5W	AGOM800/5K/LED/CAN	A19, 810 Lumen, E26
	9.5W	AGOM800/927/LED	A19, 810 Lumen, E26
	9.5W	AGOM800/927/LED/CAN	A19, 810 Lumen, E26
	9.5W	AGOM800/LED/3/CAN	A19, 800 Lumen, E26
	9.5W	AGOM800/LED/CAN	A19, 800 Lumen, E26
	9.5W	BPAGOM800/5K/LED	A19, 810 Lumen, E26
	9.5W	BPAGOM800/LED	A19, 800 Lumen, E26
	9.5W	BPAGOM800/LED/TAR	A19, 800 Lumen, E26
	9.5W	BPAGOM800/LED/TV	A19, 800 Lumen, E26
	9.5W	BPCEAG800/927/LED/3	A19, 810 Lumen, E26
	12W	LPAR30L/LEDG7/2	PAR30L, 3000K, 800 Lumen, E26, long neck, 2PK
	13W	BPCEBR30/927/LED	BR30, 750 Lumen, E26
	13W	BR30/927/LED	BR30, 750 Lumen, E26
	13W	BR30/927/LED/CAN	BR30, 750 Lumen, E26
	13W	BR30/DM/LEDG2	BR30, 750 Lumen, E26
	13W	BR30DM/LED/CAN	BR30, 750 Lumen, E26

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro Wireless® C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
Utilitech	13W	DLS03-06E30D1E-WH-F1	Downlight 3000K 700 Lumens 65WE	
	13W	LBR30DM/LEDG2	BR30	
	13.5W	LA19/OM800/LED†	A19, 3000K, 800 Lumen, Omni Directional	
	15W	15PAR30L/LEDG5	PAR30, 3000K, 790 Lumen, E26	
	15W	BPCEPAR30/930/LED	PAR30, 3000K, 770 Lumen, E26	
	15W	LBR30HO/LED/G2	BR30, Soft White, 1150 Lumen	
	15W	PAR30/S/5K/LEDG5	PAR30, 3000K, 750 Lumen, E26	
	15W	PAR30/S/LEDG5	PAR30, 3000K, 750 Lumen, E26	
	15W	PAR30L/5K/LEDG5	PAR30, 3000K, 800 Lumen, E26	
	15W	PAR30L/930/LED	PAR30, 3000K, 770 Lumen, E26	
	15W	PAR30L/LEDG5	PAR30, 3000K, 800 Lumen, E26	
	15.5W	BPCEAG1600/827/LED	A19, 1600 Lumen, E26	
	16W	AGOM1600/5K/LED/CAN	A19, 1600 Lumen, E26	
	16W	AGOM1600/LED/CAN	A19, 1600 Lumen, E26	
	16W	BPAGOM1600/5K/LED	A19, 1600 Lumen, E26	
	16W	BPAGOM1600/LED	A19, 1600 Lumen, E26	
	16W	BPAGOM1600/LED/TAR	A19, 1600 Lumen, E26	
	16W	LBR40DM/LEDG2	BR40, 1065 Lumen, E26	
	16W	LBR40DMLEDG2	BR40, 2700K, 1065 Lumen	
	16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK	
	16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK	
	16.5W	PAR38/5K/LEDG5	PAR30, 3000K, 1000 Lumen, E26	
	17W	BPCEBR40/DM/LED†	BR40	
	17W	LBR40DM/LED†	BR40, 2700K, 1065 Lumen	
	18W	BPCEPAR38/930/LED	PAR30, 3000K, 950 Lumen, E26	
	18W	PAR38/930/LED	PAR30, 3000K, 950 Lumen, E26	
	20W	20PAR38/LEDG5	PAR30, 3000K, 1035 Lumen, E26	
	20W	DLS24-06C27D1E-WH-F1	5 or 6" Downlight 2700K 1200 Lumens 90WE	
	20W	L20PAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood	
	20W	LBR40HO/LED/G2	BR40, Soft White, 1400 Lumen	
	20W	LPAR38/5K/LEDG5	PAR38, 5000K, 1000 Lumen, flood	
	20W	LPAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood	
	20W	LPAR38DM/SP/LED	PAR38, 3000K, 1000 Lumen, Spot	
	20W	PAR38/LEDG5	PAR30, 3000K, 950 Lumen, E26	
	20.5W	LPAR381400LEDG72	PAR38, 1450 Lumen, 2PK	
	Westinghouse	6.5W	03425	A19, 2700K, 450 Lumen, E26, 40WE
		7W	03098	A19, 3000K, 450 Lumen
		7W	33050	R20, 2700K, 550 Lumen, flood
		9W	03563	BR30, 2700K, 750 Lumen, E26
		10W	03439	A19, 3000K, 800 Lumen, E26, 60WE
10W		03696	A19, 2700K, 790 Lumen, E26, 60WE	
17W		33014	PAR38, 3000K, 1200 Lumen, flood	
17W		33064	PAR38, 3000K, 1200 Lumen, flood	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
 For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for Maestro Wireless[®] C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
GE	26W	FLE26HT3/2/DV/SW	Spiral
	14W	4R2014TD	R20, TruDim, 2700K
TCP	14W	4R2014TD30K	R20, TruDim, 3000K
	14W	4R2014TD35K	R20, TruDim, 3500K
	14W	4R2014TD41K	R20, TruDim, 4100K
	14W	4R2014TD50K	R20, TruDim, 5000K
	14W	4R2014TD65K	R20, TruDim, 6500K

† Requires a minimum of 2 lamps
 †† Requires a minimum of 3 lamps
 © Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Cree	6W	BA19-04527OMB-12DE26-3_1	A19 4Flow, 83CRI, 2700K, 460 Lumen, E26
	6W	BA19-04527OMF-12DE26-3U100	A19 4Flow, 2700K, 460 Lumen, E26
	6W	BA19-04550OMB-12DE26-3_1	A19 4Flow, 83CRI, 5000K, 460 Lumen, E26
	6W	BA19-04550OMF-12DE26-3U100	A19 4Flow, 5000K, 460 Lumen, E26
	9.5W	BA19-08027OMF-12DE26-2U100	A19, Soft White, 2700K, 800 Lumen, Medium base
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk
	9.5W	BBR40-07627FLF-12DE26-1U_00	BR40, 2700K, 760 Lumen, Flood
	9.5W	BBR40-07650FLF-12DE26-1U10	BR40, 5000K, 760 Lumen, Flood
	10W	BA19-08027OMB-12DE26-3_1	A19, 4Flow, 2700K, 815 Lumen, E26, 83 CRI
	10W	BA19-08050OMB-12DE26-3_1	A19, 4Flow, 5000K, 815 Lumen, E26, 83 CRI
	10.5W	BPAR30L-0853025C-12DE26-1C100	PAR30L, 3000K, 850 Lumen, 25° Spot
	10.5W	BPAR30L-0853040C-12DE26-1C100	PAR30L, 3000K, 850 Lumen, 40° Flood
	10.5W	BPAR30S-0853040C-12DE26-1C100	PAR30S, 3000K, 850 Lumen, 40° Flood
	11.5W	DRDL4-05727009-12DE26-1C100	4" Downlight, 2700K TW, 575 Lumen, E26 retrofit
	12.5W	DRDL6-06227009-12DE26-1C100	6" Downlight, 2700K TW, 625 Lumen, E26 retrofit
	12.5W	DRDL6-06250009-12DE26-1C100	6" Downlight, 5000K TW, 625 Lumen, E26 retrofit
	15W	DRDL6-11027009-12DE26-1C100	6" Downlight, 2700K, 1100 Lumen
	16.5W	BPAR38-1503027T-12DE26-2U_00	PAR38, 3000K, 1510Lm, E26, Spot
	16.5W	BPAR38-1503047T-12DE26-2U_00	PAR38, 3000K, 1510Lm, E26, Flood
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W
	18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W
	18W	BPAR38-1503027T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 27 deg spot
	18W	BPAR38-1503047T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 47 deg flood
	5W	5020001XXYY	Candle, 2700K, 350 Lumens
	5.5W	5bHPR500STW1D18	PAR20, 3000K 450Lm, E26
	5.5W	5bHPR500STW1D19	PAR20, 5000K 470Lm, E26
	6.5W	50217013006	PAR20, 3000K, 450 Lumens
	7W	ECS BR20 50WE CW 120 G1 BL	BR20, Daylight, 5000K, 525 Lumen, E26
	8W	ECS 20 CW FL 50WE 120	PAR20, 5000K, 490 Lumen
	8W	ECS 20 WW FL 50WE 120	PAR20, 3000K, 450 Lumen
	9W	5bSA800STQ1D02	A19, 3000K, 800Lm, E26, 4pk
	9W	A810SS-Q1D-01 (5bSA800STQ1D01)	A19, 2700K, 800Lm, E26
	9W	A810SS-Q1D-04 (5bSA800STQ1D03)	A19, 5000K, 840Lm, E26, 4pk
9.5W	5bHPR650STW1D29	PAR30, 3000K, 650Lm, E26	
9.5W	5bHPR650STW1D30	PAR30, 3000K, 680Lm, E26	
9.5W	ECS DN4 CW E26 120	4" Downlight, Daylight, 5000K, 650 Lumen, E26, retrofit	
9.5W	ECS DN4 CW GU24 120	4" Downlight, Daylight, 5000K, 650 Lumen, GU24 base, retrofit	
9.5W	ECS DN4 W27 E26 120	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
9.5W	ECS DN4 W27 GU24 120	4" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit	
9.5W	ECS DN6 CW GU24 120	6" Downlight, Daylight, 5000K, 650 Lumen, GU24 base, retrofit	
9.5W	ECS DN6 W27 GU24 120	6" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit	
10W	DL-N14A10FR1-27	5/6" Downlight, 2700K, 650Lm, E26	
10W	DL-N14A10FR1-50	5/6" Downlight, 5000K, 650Lm, E26	
10W	DL-N14A10FR2-27	5/6" Downlight, 2700K, 650Lm, GU24	
10W	DL-N14A10FR2-50	5/6" Downlight, 5000K, 650Lm, GU24	
10W	ECS BR30 65WE CW 120 DG	BR30, Daylight, 5000K, 700 Lumen, E26	
10W	ECS BR30 65WE CW 120 DG 3PK	BR30, Daylight, 5000K, 700 Lumen, E26, 3pk	
10W	ECS BR30 65WE W27 120 DG	BR30, Soft White, 2700K, 650 Lumen, E26	
10W	ECS BR30 65WE W27 120 DG 3BX	BR30, Soft White, 2700K, 650 Lumen, E26, 3pk	
10W	ECS BR30 65WE WW 120 DG	BR30, Warm White, 3000K, 650 Lumen, E26	
10.5W	ECS 30 75WE WW GB FL 120	PAR30 Gimbal, 3000K, 750 Lumen, E26, 75WE	
10.5W	ECS 30 75WE xxx GB xx 120	PAR30 Gimbal, Various color temperatures, 75WE	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta® Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
EcoSmart	11W	5020901XYY†	BR30, 2700K, 770 Lumens	
	11.5W	ECS BR30 65WE CW 120	BR30, 5000K, Medium Base	
	11.5W	ECS BR30 65WE W27 120	BR30, 2700K, 650 Lumen, Medium Base	
	13W	5bHPR1000SW1D19	PAR38, 3000K, 900Lm, E26	
	13W	5bHPR1000SW1D20	PAR38, 5000K, 1000Lm, E26	
	14W	ECS BR40 90WE CW 120 DG	BR40, Daylight, 5000K, 1050 Lumen, E26	
Energetic	14W	ECS BR40 90WE W27 120 DG	BR40, 2700K, 1000 Lumen, E26	
	17.5W	ELY17D-2BRW-VB†	BR40, 2700K, 1100 Lumen	
	4.5W	R14DM/LED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE	
	4.9W	BPCEFC/927/LED/3	Candle, 2700K, 330 Lumen, E12	
	6.5W	BPMPR16/GU10/DM/LED†	MR16, GU10 base	
	6.5W	MR16/GU10/DM/LED†	MR16, GU10 base	
	6.5W	R16DM/LED†	R16, Soft White, 2700K, 400 Lumen, E26, 40WE	
	8W	BPCEG25/927/LED/3	G25, 2700K, 495 Lumen, E26	
	8W	BPCER20/DM/LED	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)	
	8W	R20/927/LED	R20, 2700K	
	8W	R20/930/LED	R20, 3000K	
	8W	R20/950/LED	R20, 5000K,	
	8W	R20DM/LEDG2/CAN	R20, 2700K	
	8.5W	BR30M65/LED/6	R30, 650 Lumen, E26	
	9.7W	CELEDRT4/927	4" Downlight, 2700K, 520 Lumen, E26	
	Feit	9.7W	EDRT4/927	4" Downlight, 2700K, 520 Lumen, E26
		9.7W	LEDR4/827	4" Downlight, 2700K, 520 Lumen, E26
9.7W		LEDR4/830	4" Downlight, 3000K, 520 Lumen, E26	
9.7W		LEDR4/850	4" Downlight, 5000K, 520 Lumen, E26	
9.7W		LEDRT4/927	4" Downlight, 2700K, 520 Lumen, E26	
9.7W		LEDRT4/940	4" Downlight, 4000K, 520 Lumen, E26	
13W		BPCEBR30LED	BR30	
13.5W		A19/OM800/5K/LED	A19, 5000K, Omni Directional	
13.5W		A19/OM800/LED	A19, 3000K, Omni Directional	
13.5W		BPCEA19/OM800/LED	A19, Omni Directional	
13.5W		BPCEA19/OM800/LED/CAN	A19, Omni Directional	
14W		LEDR56/830	Downlight, 3000K, 925 Lumen, retrofit kit	
17W		BR40/DM/LED†	BR40, 2700K, 1065 Lumen	
21.5W		CELEDRT56/927/2	5/6" Downlight, 2700K, 1250 Lumen, E26	
21.5W		LEDR56/827	5/6" Downlight, 2700K, 1250 Lumen, E26	
21.5W		LEDR56/927/MP/4	5/6" Downlight, 2700K, 1250 Lumen, E26, 4 pack	
21.5W		LEDR56HO/830	5/6" Downlight, 3000K, 1250 Lumen, E26	
21.5W		LEDR56HO/850	5/6" Downlight, 5000K, 1250 Lumen, E26	
GE		8W	LED8DA19/827	A19, 2700K, 450 Lumen, E26
		10.5W	FAM45LED11DAV3H	A19, 2700K, 800 Lumens, E26, 2pk
	14W	LED14DA21V2/827W	A21, 2700K, 1100 Lumen, E26	
Halo	12.2W	SLD405830WHR	4" Downlight, 3000K, 650 Lumen, E26 kit	
	12.2W	SLD405xxxxx	4" Downlight, 710-800 Lumen, 12W to 12.2W	
	12.2W	SLD606830WHR	5"/6" Downlight, 3000K, 675 Lumen, E26 kit	
	12.2W	SLD606xxxxx	5"/6" Downlight, 780-800 Lumen, 12.2W to 13.2W	
	13.2W	SLD606927WH	6" Downlight, 2700K, 780 Lumen	
	13.2W	SLD606927WHJB	6" Downlight, 2700K, 780 Lumen	
	13.2W	SLD606927WHR	6" Downlight, 2700K, 780 Lumen	
	13.2W	SLD606930WH	6" Downlight, 3000K, 780 Lumen	
	13.2W	SLD606930WHJB	6" Downlight, 3000K, 780 Lumen	
	13.2W	SLD606930WHR	6" Downlight, 3000K, 780 Lumen	
	13.2W	SLD606935WH	6" Downlight, 3500K, 780 Lumen	
	13.2W	SLD606935WHJB	6" Downlight, 3500K, 780 Lumen	
	13.2W	SLD606940WH	6" Downlight, 4000K, 780 Lumen	
	13.2W	SLD606940WHJB	6" Downlight, 4000K, 780 Lumen	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta® Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Halo	14.8W	SLD612827WHUNVJB	6" Downlight, 2700K, 1100 Lumen, E26
	14.8W	SLD612830WHUNVJB	6" Downlight, 3000K, 1150 Lumen, E26
	14.8W	SLD612835WHUNVJB	6" Downlight, 3500K, 1200 Lumen, E26
	14.8W	SLD612840WHUNVJB	6" Downlight, 4000K, 1215 Lumen, E26
	14.8W	SLD612927WHUNVJB	6" Downlight, 2700K, 880 Lumen, E26
	14.8W	SLD612930WHUNVJB	6" Downlight, 3000K, 925 Lumen, E26
	14.8W	SLD612935WHUNVJB	6" Downlight, 3500K, 965 Lumen, E26
	14.8W	SLD612940WHUNVJB	6" Downlight, 4000K, 1000 Lumen, E26
Lighting Science	10.5W	LS 30 75WE xxx GB xx 120	PAR30, various color temperatures
	11.5W	DFN BR30 65WE CW 120	BR30, Cool White, 5000K, Medium base
	11.5W	DFN BR30 65WE NW 120	BR30, Neutral White, 4000K, Medium base
	11.5W	DFN BR30 65WE W27 120	BR30, Warm White, 2700K, Medium base
	11.5W	DFN BR30 65WE WW 120	BR30, Warm White, 3000K, Medium base
Megaman	3.2W	LC1503.2DCS-E12-27K†	B10, 2700K, 250Lm, E12
Osram	13W	73396 (LEDRT56900827FL80)	5/6" Downlight, 2700K, 900 Lumen, E26
	3.5W	457226 (9290011668)†	Candle, 2700K, 180 Lumen, E12, Warm Glow
Philips	3.5W	457234 (9290011668)†	Candle, 2700K, 180 Lumen, E12, Warm Glow
	3.5W	457242 (9290011668)†	Candle, 2700K, 180 Lumen, E12, Warm Glow
	4.5W	454371	PAR16, 3000K, 315 Lumens
	4.5W	9290002439	Candle, Warm White, 2700K, 320 Lumen, E26 base, Post Light
	4.5W	9290002797††	Candle, 2700K, 330 Lumen, E26, blunt tip
	4.5W	9290002889††	Candle, 2700K, 330 Lumen, E12, blunt tip
	4.5W	9290002890††	A15, 2700K, 330 Lumen, E12
	4.5W	9290002891††	A15, 2700K, 330 Lumen, E26
	4.5W	457119 (9290011673)	Candle, 330Lm, E26
	4.5W	457168 (9290011672)	G16.5, 330 Lm, E26
	4.5W	457184 (9290011670)	Candle, 330Lm, E12
	6W	9290002242	MR16, 3000K, 300 Lumen, GU10 base
	6W	456995 (9290011557)	R20, 2700K, 450 Lumen, Warm Glow
	6.5W	9290011347 (455741)	A19, Warm Glow, 450 Lumen
	7W	9290002706	A19 SlimStyle, Daylight, 5000K, 450 Lumen, E26
	8W	9290002267	A19, 2700K, 470 Lumen
	8W	9290002295	A19, 5000K, 470 Lumen
	8W	9290002329	PAR20, 3000K, 470 Lumen, E26
	8.5W	9290002543	BR30, 5000K, 730 Lumen, 8.5W
	9.5W	9290011117	BR30, 2700K, 730 Lumen, WarmGlow to 2200K (Nov 2014 or later)
	9.5W	9290011118 (452359)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452383)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452417)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452441)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452466)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452482)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	10W	458828 (9290011816)	A19, 2700K, 800 Lumen, 60WE, E26
	10W	459339 (9290011898)	G25, 2700K, 800 Lumen, E26
	10.5W	9290002544	BR30, 2700K, 730 Lumen
	10.5W	9290002707	A19 SlimStyle, Soft White, 2700K, 800 Lumen, 3pk
	11W	9290002268	A19, 2700K, 830 Lumen
	11W	9290002296	A19, 5000K, 830 Lumen
	11W	9290011113	PAR30L, 3000K, ? Lumen, E26
	12W	9290002580 (431392)	BR40, 2700K, 800 Lumen
	13W	9290011120	A21 SlimStyle, 2700K, 1100 Lumen
13W	9290002523 13PAR38/F25 3000 DIM AF RO	PAR38, 3000K, 950 Lumen	
13W	9290011320 (454736)	PAR38, 2700K, 900 Lumen, E26	
13W	9290011321 (454744)	PAR38, 2700K, 900 Lumen, E26	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
Philips	13W	9290011322 (454751)	PAR38, 2700K, 900 Lumen, E26	
	14W	459065	A19, 2700K, 1100Lm, 75WE, E26	
	14W	9290011839	A21, 2700K, 1100 Lumen, E26	
	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26	
	15W	9290011111	PAR38, 3000K, 1050 Lumen, E26, Flood	
	15W	9290011112	PAR38, 5000K, 1050 Lumen, E26, Flood	
	18W	9290011741	A21, 2700K, 1600Lumen, E26	
	18W	459107 (9290011741)	A21, 2700K, 1600 Lumen, E26	
	18W	459115 (9290011741)	A21, 2700K, 1600Lumen, E26	
	18W	459123 (9290011741)	A21, 2700K, 1600Lumen, E26	
	18W	459131 (9290011741)	A21, 2700K, 1600Lumen, E26	
	19W	453340	A19, 2700K, 1620Lm, 100WE, E26	
	19W	9290002577 (431395)	PAR38, 1300 Lumen, 25deg flood	
	19W	9290002578 (431403)	PAR38, 1300 Lumen, 35deg flood	
	Project Source	10W	DLS22-06B30D1E-WH-1	Downlight, 3000K, 650 Lumens, E26
Satco	8W	S9140	R20, 2700K, 525 Lumen, E26	
	8W	S9141	R20, 2700K, 525 Lumen, E26	
	8W	S9142	R20, 2700K, 525 Lumen, E26	
	8W	S9143	R20, 2700K, 525 Lumen, E26	
	11W	S9084	PAR30, 3000K, 780 Lumen, E26, short neck, 25° Beam	
	11W	S9085	PAR30, 4000K, 780 Lumen, E26, short neck, 25° Beam	
	11W	S9086	PAR30, 3000K, 780 Lumen, E26, short neck, 40° Beam	
	11W	S9087	PAR30, 4000K, 780 Lumen, E26, short neck, 40° Beam	
	11W	S9088	PAR30, 3000K, 780 Lumen, E26, long neck, 25° Beam	
	11W	S9089	PAR30, 4000K, 780 Lumen, E26, long neck, 25° Beam	
	11W	S9090	PAR30, 3000K, 780 Lumen, E26, long neck, 40° Beam	
	11W	S9091	PAR30, 4000K, 780 Lumen, E26, long neck, 40° Beam	
	13W	S9410	PAR30S, 2700k, 950 Lumen, E26	
	13W	S9415	PAR30S, 2700k, 950 Lumen, E26	
	13W	S9439	PAR30S, 2700k, 950 Lumen, E26	
	17W	S9092	PAR38, 3000K, 1200 Lumen, E26, 25° beam	
	17W	S9093	PAR38, 4000K, 1200 Lumen, E26, 25° beam	
	17W	S9094	PAR38, 3000K, 1200 Lumen, E26, 40° beam	
	17W	S9095	PAR38, 4000K, 1200 Lumen, E26, 40° beam	
	18W	S9455	PAR38, 3000K, 1400 Lumen, E26, Flood	
	18W	S9456	PAR38, 4000K, 1400 Lumen, E26, Flood	
	Solais	7W	LRP20/25/27K	PAR20, 2700K, 475 Lumen, E26, 25° Beam
		7W	LRP20/25/30K	PAR20, 3000K, 500 Lumen, E26, 25° Beam
		7W	LRP20/40/27K	PAR20, 2700K, 475 Lumen, E26, 40° Beam
		7W	LRP20/40/30K	PAR20, 3000K, 500 Lumen, E26, 40° Beam
		11W	LR20/25/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, narrow flood
		11W	LR20/25/30K/750	PAR20, 3000K, 750 Lumen, E26, narrow flood
		11W	LR20/40/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, wide flood
11W		LR20/40/30K/750/xx	PAR20, 3000K, 750 Lumen, E26, wide flood	
16W		LR30/10/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 10° Beam	
16W		LR30/10/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 10° Beam	
16W		LR30/10/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 10° Beam	
16W		LR30/15/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 15° Beam	
16W		LR30/15/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 15° Beam	
16W		LR30/15/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 15° Beam	
16W		LR30/25/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 25° Beam	
16W		LR30/25/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 25° Beam	
16W		LR30/25/30K/1200/WH	PAR30, 3000K, 1200 Lumen, E26, short neck, 25° Beam	
16W		LR30/40/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 40° Beam	
16W		LR30/40/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 40° Beam	
16W		LR30/40/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 40° Beam	
16W		LRP38/25/27K	PAR38, 2700K, 1025 Lumen, E26, 25° Beam	
16W		LRP38/25/30K	PAR38, 3000K, 1100 Lumen, E26, 25° Beam	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Solais	16W	LRP38/40/27K	PAR38, 2700K, 1025 Lumen, E26, 40° Beam
	16W	LRP38/40/30K	PAR38, 3000K, 1100 Lumen, E26, 40° Beam
	20W	LR38/25/30K/1450/SL	PAR38, 3000K, 1450 Lumen, E26, 15° Beam
	28W	LR38/15/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/15/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	28W	LR38/25/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/25/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	28W	LR38/40/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/40/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	Sylvania	6W	79643
6.5W		79162 (LED6.5A19/DIM/O/850/G5)	A19, 5000K, 450 Lumen, E26
6.5W		79163 (LED6.5A19/DIM/O/850/G5)	A19, 2700K, 450 Lumen, E26
7W		75169	G25, 475 Lumen, E26
7W		75170	G25, 475 Lumen, E26
7W		75180	G25, 475 Lumen, E26
7W		79653 (LED7R20DIMSE830G3RP [LW])	R20, 3000K, 525 Lumen, E26,
7W		79659 (LED7R20/DIM/SE/830/G3)	R20, 3000K, 525 Lumen, E26,
7W		LED7A19/DIM/O/SE/830 (78214)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
7W		LED7A19/DIM/O/SE/830/RP (78213)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
8W		LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26
8W		LED8PAR16/DIM/930/FL36/P/LW	PAR16, Soft White, 390 Lumen
8W		LED8PAR16/GU10/DIM/930/FL36/RP	PAR16, GU10, Soft White, 390 Lumen
9W		79246 (LED9A19DIMO827G5)	A19, 2700K, 800 Lumen, E26
9W		79247 (LED9A9DIMO827G5)	A19, 2700K, 800 Lumen, E26
9W		79249 (LED9A19DIMO850RP)	A19, 5000K, 800 Lumen, E26
9W		79273 (LED9A19DIMO850G5RP)	A19, 5000K, 800 Lumen, E26
9W		79497 (LED9A19DIMO827G5CC)	A19, 2700K, 800 Lumen, E26
9W		LED9BR30/DIM/HO/850/G4	BR30, 800 Lumen, E26
9W		LED9BR30/DIM/HO/850/G4/RP	BR30, 800 Lumen, E26
9W		LED9BR30/DIM/HO/850/G4/RP2	BR30, 800 Lumen, E26
9W		LED9BR30/DIM/HO/G4/RP	BR30, 800 Lumen, E26
10W		LED10A19/DIM/O/SE/830	A19, 3000K, 800 Lumen
10W		LED10A19/DIM/O/SE/830/RP (78215)	A19, 3000K, 800 Lumen
10.5W		LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE
10.5W		LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE
10.5W		LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE
10.5W		LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE
10.5W		LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE
10.5W		LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE
10.5W		LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE
11W		79654 (LED11BR30DIMSE830G3RP[LW])	BR30, 3000K, 800 Lumen, E26
11W	79657 (LED11BR30/DIM/SE/830/G3)	BR30, 3000K, 800 Lumen, E26	
11W	79660 (LED11BR30DIMSE830G3RP)	BR30, 3000K, 800 Lumen, E26	
11W	LED11BR30/DIM/HO/827/G3 (78413)	BR30, 2700K, 800 Lumen, E26	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Sylvania	11W	LED11BR30/DIM/HO/827/G3/RP (78415)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (79121)	BR30, 2700K, 800 Lumen, E26
	11W	LED11PAR20/DIM/930/FL30/P2	PAR20, Soft White, 550 Lumen
	12W	LED12BR30/DIM/HO/827	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/HO/827/HVP	BR30, 2700K, Medium base
	13W	73397-1	5/6" Downlight, 3000K, 900 Lumen, E26
	13W	73422-1	5/6" Downlight, 3000K, 900 Lumen, E26
	13W	73675-0	4/5/6" Downlight, 3000K, 900 Lumens, E26
	13W	73676-0	4/5/6" Downlight, 3000K, 900 Lumens, E26
	13W	LELD900830FL120	4/5/6" Downlight, 3000K, 900 Lumens, E26
	14W	74031 (LED14PAR38DIM850FL40GL1WRP)	PAR38, 5000K, 1050 Lumen, E26
	14W	74032 (LED14PAR38DIM830NFL25GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74034 (LED14PAR38DIM830FL40GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74035 (LED14PAR38DIM830NFL25GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74036 (LED14PAR38DIM830WSP15GL1W)	PAR38, 3000K, 1050 Lumen, E26
	14W	74037 (LED14PAR38DIM827FL40GL1W)	PAR38, 2700K, 1050 Lumen, E26
	14W	74065 (LED14PAR38DIM850FL40GL1WRP)	PAR38, 5000K, 1050 Lumen, E26
	14W	74066 (LED14PAR38DIM830FL40GL1WRP)	PAR38, 3000K, 1050 Lumen, E26
	14W	74067 (LED14PAR38DIM830FL40GL1WRP)	PAR38, 3000K, 1050 Lumen, E26
	15W	79655 (LED15BR40DIMSE830G3RP [LW]) [†]	BR40, 3000K, 1100 Lumen, E26
	15W	79661 (LED15BR40DIMSE830G3RP) [†]	BR40, 3000K, 1100 Lumen, E26
	15W	LED15BR40/DIM/SE/830/G3 [†]	BR40, 3000K, 1100 Lumen, E26,
	17W	LED17PAR30LN/DIM/830/WSP15/P	PAR30, 3000K, 1200 Lumen, E26, spot
	17W	LED17PAR30LN/DIM/830/WSP20	PAR30, 3000K, 1200 Lumen, E26, wide spot
	20W	LED20PAR38/DIM/930/FL40/P2	PAR38, 3000K, 1000 Lumen,
	21W	LED21/PAR38/DIM/P/930/FL30/HVP	PAR38, Warm White, 3000K, 1100 Lumen, E26, 21W
	TCP	12W	LED12P30D27KNFL
17W		LED17BR40D27K (LED17BR40D)	BR40, 2700K, 1200 Lumen, E26
17W		LED17HOP38D27KNFL (LED17P38D1)	PAR38, 2700K, 1550 Lumen, E26, Narrow Flood
17W		LED17P38D24KNFL	PAR38, 2400K, 1105 Lumen, E26
Utilitech	3W	LG161/2DM/IF/LED [†]	G16.5, Warm White, 3000K, 200 Lumen, E12 base, frosted
	4.5W	LR14DMLED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
	4.8W	LA15DM/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, clear
	4.8W	LA15DM/IF/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, frosted
	4.8W	LA15DMC/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LCFFDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E12 base, frosted flame tip
	4.8W	LEFCDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E26 base, clear flame tip
	4.8W	LG161/2DM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LG161/2DM/IF/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, frosted
	4.8W	LGMDM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E26, clear
	5.5W	LMR16GU10DMLEDG2	MR16, 2700K, 350 Lumen, GU10, Flood
	6.5W	LMR16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	LMR16DMGU10 [†]	MR16, GU10 base
	6.5W	LR16DMLED [†]	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	R20/DM/5K/LED	R20, 450 Lumen, E26
	8W	BPCER20/927/LED	R20, 450 Lumen, E26
	8W	LCFCDM500LED [†]	Candle, 3000K, 500 Lumen, E12 candle base
	8W	LG25DM/LEDG2 [†]	G25, Warm White, 3000K, 510 Lumen, E26
	8W	LR20DMLEDG2	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	8W	R20/927/LED	R20, 450 Lumen, E26
	8W	R20/DM/LEDG2	R20, 450 Lumen, E26
	8W	R20DM/LEDG2/CAN	R20, 450 Lumen, E26
	8.5W	LMR16DMGU10/500/LED [†]	MR16, Warm White, 3000K, 520 Lumen, GU10, 120V
	8.5W	LPAR20LEDG72	PAR20, 500 Lumen, 2PK
	9W	LR20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9W	R20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9.5W	AGOM800/5K/LED/CAN	A19, 810 Lumen, E26
	9.5W	AGOM800/927/LED	A19, 810 Lumen, E26
	9.5W	AGOM800/927/LED/CAN	A19, 810 Lumen, E26
	9.5W	AGOM800/LED/3/CAN	A19, 800 Lumen, E26
	9.5W	AGOM800/LED/CAN	A19, 800 Lumen, E26
	9.5W	BPAGOM800/5K/LED	A19, 810 Lumen, E26
	9.5W	BPAGOM800/LED	A19, 800 Lumen, E26
	9.5W	BPAGOM800/LED/TAR	A19, 800 Lumen, E26
	9.5W	BPAGOM800/LED/TV	A19, 800 Lumen, E26
	9.5W	BPCEAG800/927/LED/3	A19, 810 Lumen, E26
	11W	DLS02-04A27D1E-WH-F1	4" Downlight, 2700K, 600 Lumen, E26 retrofit
	11W	DLS02-04A27D1E-WH-F2	4" Downlight, 2700K, 600 Lumen, E26 retrofit 2pk
	11W	DLS02-41127D1E-WF1	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	11.5W	MQTL1017-LED11.5K850 [†]	Downlight, 5000K, 800 Lumen, E26 retrofit kit
	12W	LPAR30L/LEDG7/2	PAR30L, 3000K, 800 Lumen, E26, long neck, 2PK
	13W	BPCEBR30/927/LED	BR30, 750 Lumen, E26
	13W	BR30/927/LED	BR30, 750 Lumen, E26
	13W	BR30/927/LED/CAN	BR30, 750 Lumen, E26
	13W	BR30/DM/LEDG2	BR30, 750 Lumen, E26
	13W	BR30DM/LED/CAN	BR30, 750 Lumen, E26
	13W	DLS02-61327D1E-WF1	5" or 6" Downlight, Soft White, 2700K, 800 Lumen, E26 retrofit
	13W	DLS02-61350D1E-WF1	5" or 6" Downlight, Daylight, 5000K, 800 Lumen, E26 retrofit
	13W	DLS03-06E30D1E-WH-F1	Downlight 3000K 700 Lumens 65WE
	13W	LBR30DM/LEDG2	BR30
	13.5W	LA19/OM800/LED	A19, 3000K, 800 Lumen, Omni Directional
	15W	15PAR30L/LEDG5	PAR30, 3000K, 790 Lumen, E26
	15W	BPCEPAR30/930/LED	PAR30, 3000K, 770 Lumen, E26
	15W	LBR30HO/LED/G2	BR30, Soft White, 1150 Lumen
	15W	PAR30/S/5K/LEDG5	PAR30, 3000K, 750 Lumen, E26
	15W	PAR30/S/LEDG5	PAR30, 3000K, 750 Lumen, E26
	15W	PAR30L/5K/LEDG5	PAR30, 3000K, 800 Lumen, E26

Utilitech

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Utilitech	15W	PAR30L/930/LED	PAR30, 3000K, 770 Lumen, E26
	15W	PAR30L/LEDG5	PAR30, 3000K, 800 Lumen, E26
	15.5W	BPCEAG1600/827/LED	A19, 1600 Lumen, E26
	16W	AGOM1600/5K/LED/CAN	A19, 1600 Lumen, E26
	16W	AGOM1600/LED/CAN	A19, 1600 Lumen, E26
	16W	BPAGOM1600/5K/LED	A19, 1600 Lumen, E26
	16W	BPAGOM1600/LED	A19, 1600 Lumen, E26
	16W	BPAGOM1600/LED/TAR	A19, 1600 Lumen, E26
	16W	LBR40DM/LEDG2	BR40, 1065 Lumen, E26
	16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK
	16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK
	16.5W	PAR38/5K/LEDG5	PAR30, 3000K, 1000 Lumen, E26
	17W	BPCEBR40/DM/LED [†]	BR40
	17W	LBR40DM/LED [†]	BR40, 2700K, 1065 Lumen
	17.5W	YGA08A35-17.5W-827 [†]	BR40, 2700K, 1100 Lumen
	18W	BPCEPAR38/930/LED	PAR30, 3000K, 950 Lumen, E26
	18W	PAR38/930/LED	PAR30, 3000K, 950 Lumen, E26
	20W	20PAR38/LEDG5	PAR30, 3000K, 1035 Lumen, E26
	20W	DLS24-06C27D1E-WH-F1	5 or 6" Downlight 2700K 1200 Lumens 90WE
	20W	LBR40HO/LED/G2	BR40, Soft White, 1400 Lumen
20W	PAR38/LEDG5	PAR30, 3000K, 950 Lumen, E26	
20.5W	LPAR381400LEDG72	PAR38, 1450 Lumen, 2PK	
Westinghouse	17W	33014	PAR38, 3000K, 1200 Lumen, flood
	17W	33064	PAR38, 3000K, 1200 Lumen, flood

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
 For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for Caséta[®] Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
GE	26W	FLE26HT3/2/DV/SW	Spiral
	14W	4R2014TD	R20, TruDim, 2700K
TCP	14W	4R2014TD30K	R20, TruDim, 3000K
	14W	4R2014TD35K	R20, TruDim, 3500K
	14W	4R2014TD41K	R20, TruDim, 4100K
	14W	4R2014TD50K	R20, TruDim, 5000K
	14W	4R2014TD65K	R20, TruDim, 6500K

† Requires a minimum of 2 lamps
 †† Requires a minimum of 3 lamps
 © Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless plug-in lamp dimmer

Caséta Wireless plug-in lamp dimmer: PD-3PCL

Maximum wattage controlled: 100W



Brand	Wattage	Model	Description	
Cree	6W	BA19-04527OMF-12DE26-1U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base	
	6W	BA19-04527OMF-12DE26-2U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base	
	6W	BA19-04550OMF-12DE26-2U500	A19, 5000K, 450 Lumen, 40WE, 4pk	
	9.5W	BA19-08027OMF-12DE26-2U100	A19, Soft White, 2700K, 800 Lumen, Medium base	
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk	
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W	
Feit	18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W	
	9.5W	BPCER20/DM/LED	PAR20	
	9.5W	PAR20/5K/LEDG5	PAR20, 5000K	
	9.5W	PAR20/5K/LEDG5/CAN	PAR20, 5000K	
	9.5W	PAR20/LEDG5	PAR20, 3000K, 450 Lumen	
	9.5W	PAR20/LEDG5/CAN	PAR20	
	13.5W	A19/OM800/5K/LED	A19, 5000K, Omni Directional	
	13.5W	A19/OM800/LED	A19, 3000K, Omni Directional	
	13.5W	BPCEA19/OM800/LED	A19, Omni Directional	
	13.5W	BPCEA19/OM800/LED/CAN	A19, Omni Directional	
GE	18W	LED18D38W827/15	PAR38, 2700K, E26, 15° Beam	
	18W	LED18D38W827/25	PAR38, 2700K, E26, 25° Beam	
	18W	LED18D38W827/40	PAR38, 2700K, E26, 40° Beam	
	18W	LED18D38W830/15	PAR38, 3000K, 1400 Lumen, E26, 15° Beam	
	18W	LED18D38W830/25	PAR38, 3000K, 1400 Lumen, E26, 25° Beam	
	18W	LED18D38W830/40	PAR38, 3000K, 1400 Lumen, E26, 40° Beam	
	18W	LED18D38W927/15	PAR38, 2700K, 1100 Lumen, E26, 15° Beam	
	18W	LED18D38W927/25	PAR38, 2700K, 1100 Lumen, E26, 25° Beam	
	18W	LED18D38W927/40	PAR38, 2700K, 1100 Lumen, E26, 40° Beam	
	18W	LED18D38W930/15	PAR38, 3000K, 1200 Lumen, E26, 15° Beam	
	18W	LED18D38W930/25	PAR38, 3000K, 1200 Lumen, E26, 25° Beam	
	18W	LED18D38W930/40	PAR38, 3000K, 1200 Lumen, E26, 40° Beam	
	Philips	8W	9290002267	A19, 2700K, 470 Lumen
		8W	9290002295	A19, 5000K, 470 Lumen
9.5W		455840 (9290011345)	A19, Soft White, 2200-2700K, 800 Lumen, E26	
11W		9290002268	A19, 2700K, 830 Lumen	
11W		9290002296	A19, 5000K, 830 Lumen	
13W		9290011120	A21 SlimStyle, 2700K, 1100 Lumen	
Satco	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26	
	10.5W	S9037	A19, 2700K, 810 Lumen, E26	
	10.5W	S9038	A19, 3500K, 830 Lumen, E26	
Sylvania	10.5W	S9039	A19, 5000K, 870 Lumen, E26	
	8W	LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26	
	10.5W	LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE	
	10.5W	LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE	
	10.5W	LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE	
	10.5W	LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE	
	10.5W	LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE	
	10.5W	LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE	
	10.5W	LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE	
	11W	73195-0	Downlight	
11W	73497-0	Downlight		
Utilitech	7.5W	LA19DM/LEDG2	A19, 3000K, 450 Lumen	
	8W	LG25DM/LEDG2	G25, Warm White, 3000K, 510 Lumen, E26	
	9.5W	LPAR20/5K/LEDG5	PAR20, 5000K, 500 Lumen	
	9.5W	LPAR20/LEDG5	PAR20, 3000K, 450 Lumen	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
 For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless plug-in lamp dimmer

Caséta Wireless plug-in lamp dimmer: PD-3PCL

Maximum wattage controlled: 100W



Brand	Wattage	Model	Description
Utilitech	9.5W	LPAR20DM/SP/LED	PAR20, 3000K, 465 Lumen, Spot
	13.5W	LA19/OM800/LED	A19, 3000K, 800 Lumen, Omni Directional
	16W	LBR40DM/LEDG2	BR40, 1065 Lumen, E26

† Requires a minimum of 2 lamps
 †† Requires a minimum of 3 lamps
 © Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for Caséta[®] Wireless plug-in lamp dimmer

Caséta Wireless plug-in Lamp dimmer: PD-3PCL

Maximum wattage controlled: 100W



Brand	Wattage	Model	Description
GE	26W	FLE26HT3/2/DV/SW	Spiral

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless In-wall Dimmer PRO

Caséta Wireless In-wall Dimmer PRO: PD-10NXD

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Cree	9.5W	BA19-08027OMF-12DE26-2U100	A19, Soft White, 2700K, 800 Lumen, Medium base
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk
	9.5W	BBR40-07627FLF-12DE26-1U_00	BR40, 2700K, 760 Lumen, Flood
	9.5W	BBR40-07650FLF-12DE26-1U10	BR40, 5000K, 760 Lumen, Flood
	10W	BA19-08027OMB-12DE26-3_1	A19, 4Flow, 2700K, 815 Lumen, E26, 83 CRI
	10W	BA19-08050OMB-12DE26-3_1	A19, 4Flow, 5000K, 815 Lumen, E26, 83 CRI
	10.5W	BPAR30L-0853025C-12DE26-1C100	PAR30L, 3000K, 850 Lumen, 25° Spot
	10.5W	BPAR30L-0853040C-12DE26-1C100	PAR30L, 3000K, 850 Lumen, 40° Flood
	10.5W	BPAR30S-0853040C-12DE26-1C100	PAR30S, 3000K, 850 Lumen, 40° Flood
	11.5W	DRDL4-05727009-12DE26-1C100	4" Downlight, 2700K TW, 575 Lumen, E26 retrofit
	15W	DRDL6-11027009-12DE26-1C100	6" Downlight, 2700K, 1100 Lumen
	16.5W	BPAR38-1503027T-12DE26-2U_00	PAR38, 3000K, 1510Lm, E26, Spot
	16.5W	BPAR38-1503047T-12DE26-2U_00	PAR38, 3000K, 1510Lm, E26, Flood
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W
	18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W
EcoSmart	5W	5020001XXYY	Candle, 2700K, 350 Lumens
	5.5W	5bHPR500STW1D18	PAR20, 3000K 450Lm, E26
	5.5W	5bHPR500STW1D19	PAR20, 5000K 470Lm, E26
	6.5W	50217013006	PAR20, 3000K, 450 Lumens
	8W	ECS 20 CW FL 50WE 120	PAR20, 5000K, 490 Lumen
	8W	ECS 20 WW FL 50WE 120	PAR20, 3000K, 450 Lumen
	9W	5bSA800STQ1D02	A19, 3000K, 800Lm, E26, 4pk
	9W	A810SS-Q1D-01 (5bSA800STQ1D01)	A19, 2700K, 800Lm, E26
	9W	A810SS-Q1D-04 (5bSA800STQ1D03)	A19, 5000K, 840Lm, E26, 4pk
	9.5W	5bHPR650STW1D29	PAR30, 3000K, 650Lm, E26
	9.5W	5bHPR650STW1D30	PAR30, 3000K, 680Lm, E26
	10W	DL-N14A10FR1-27	5/6" Downlight, 2700K, 650Lm, E26
	10W	DL-N14A10FR1-50	5/6" Downlight, 5000K, 650Lm, E26
	10W	DL-N14A10FR2-27	5/6" Downlight, 2700K, 650Lm, GU24
	10W	DL-N14A10FR2-50	5/6" Downlight, 5000K, 650Lm, GU24
	10W	ECS BR30 65WE CW 120 DG	BR30, Daylight, 5000K, 700 Lumen, E26
	10W	ECS BR30 65WE CW 120 DG 3PK	BR30, Daylight, 5000K, 700 Lumen, E26, 3pk
	10W	ECS BR30 65WE W27 120 DG	BR30, Soft White, 2700K, 650 Lumen, E26
	10W	ECS BR30 65WE W27 120 DG 3BX	BR30, Soft White, 2700K, 650 Lumen, E26, 3pk
	10W	ECS BR30 65WE WW 120 DG	BR30, Warm White, 3000K, 650 Lumen, E26
	10.5W	ECS 30 75WE WW GB FL 120	PAR30 Gimbal, 3000K, 750 Lumen, E26, 75WE
	10.5W	ECS 30 75WE xxx GB xx 120	PAR30 Gimbal, Various color temperatures, 75WE
	11W	5020901XXYY†	BR30, 2700K, 770 Lumens
	11.5W	ECS BR30 65WE CW 120	BR30, 5000K, Medium Base
	11.5W	ECS BR30 65WE W27 120	BR30, 2700K, 650 Lumen, Medium Base
13W	5bHPR1000SW1D19	PAR38, 3000K, 900Lm, E26	
13W	5bHPR1000SW1D20	PAR38, 5000K, 1000Lm, E26	
14W	ECS BR40 90WE CW 120 DG	BR40, Daylight, 5000K, 1050 Lumen, E26	
14W	ECS BR40 90WE W27 120 DG	BR40, 2700K, 1000 Lumen, E26	
Feit	4.5W	R14DM/LED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	6.5W	BPMR16/GU10/DM/LED†	MR16, GU10 base
	6.5W	MR16/GU10/DM/LED†	MR16, GU10 base
	6.5W	R16DM/LED†	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	8W	BPCER20/DM/LED	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	8W	R20/927/LED	R20, 2700K
	8W	R20/930/LED	R20, 3000K

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta® Wireless In-wall Dimmer PRO

Caséta Wireless In-wall Dimmer PRO: PD-10NXD

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description	
Feit	8W	R20/950/LED	R20, 5000K,	
	8W	R20DM/LEDG2/CAN	R20, 2700K	
	13W	BPCEBR30LED	BR30	
	13.5W	A19/OM800/5K/LED	A19, 5000K, Omni Directional	
	13.5W	A19/OM800/LED	A19, 3000K, Omni Directional	
	13.5W	BPCEA19/OM800/LED	A19, Omni Directional	
	13.5W	BPCEA19/OM800/LED/CAN	A19, Omni Directional	
	17W	BR40/DM/LED†	BR40, 2700K, 1065 Lumen	
21.5W	LEDR56/827	5/6" Downlight, 2700K, 1250 Lumen, E26		
GE	8W	LED8DA19/827	A19, 2700K, 450 Lumen, E26	
	14W	LED14DA21V2/827W	A21, 2700K, 1100 Lumen, E26	
Halo	12.2W	SLD405830WHR	4" Downlight, 3000K, 650 Lumen, E26 kit	
	12.2W	SLD405xxxx	4" Downlight, 710-800 Lumen, 12W to 12.2W	
	12.2W	SLD606830WHR	5"/6" Downlight, 3000K, 675 Lumen, E26 kit	
	12.2W	SLD606xxxx	5"/6" Downlight, 780-800 Lumen, 12.2W to 13.2W	
	14.8W	SLD612827WHUNVJB	6" Downlight, 2700K, 1100 Lumen, E26	
	14.8W	SLD612830WHUNVJB	6" Downlight, 3000K, 1150 Lumen, E26	
	14.8W	SLD612835WHUNVJB	6" Downlight, 3500K, 1200 Lumen, E26	
	14.8W	SLD612840WHUNVJB	6" Downlight, 4000K, 1215 Lumen, E26	
	14.8W	SLD612927WHUNVJB	6" Downlight, 2700K, 880 Lumen, E26	
	14.8W	SLD612930WHUNVJB	6" Downlight, 3000K, 925 Lumen, E26	
Lighting Science	14.8W	SLD612935WHUNVJB	6" Downlight, 3500K, 965 Lumen, E26	
	14.8W	SLD612940WHUNVJB	6" Downlight, 4000K, 1000 Lumen, E26	
	10.5W	LS 30 75WE xxx GB xx 120	PAR30, various color temperatures	
	11.5W	DFN BR30 65WE CW 120	BR30, Cool White, 5000K, Medium base	
	11.5W	DFN BR30 65WE NW 120	BR30, Neutral White, 4000K, Medium base	
	11.5W	DFN BR30 65WE W27 120	BR30, Warm White, 2700K, Medium base	
Megaman	11.5W	DFN BR30 65WE WW 120	BR30, Warm White, 3000K, Medium base	
	13W	LS GLP6 W27 120 WH S1 BX	6" Downlight, 2700K, E26 retrofit	
	3.2W	LC1503.2DCS-E12-27K	B10, 2700K, 250Lm, E12	
	3.5W	457226 (9290011668)†	Candle, 2700K, 180 Lumen, E12, Warm Glow	
	3.5W	457234 (9290011668)†	Candle, 2700K, 180 Lumen, E12, Warm Glow	
	3.5W	457242 (9290011668)†	Candle, 2700K, 180 Lumen, E12, Warm Glow	
	4.5W	454371	PAR16, 3000K, 315 Lumens	
	4.5W	9290002439	Candle, Warm White, 2700K, 320 Lumen, E26 base, Post Light	
	4.5W	9290002797††	Candle, 2700K, 330 Lumen, E26, blunt tip	
	4.5W	9290002889††	Candle, 2700K, 330 Lumen, E12, blunt tip	
	4.5W	9290002890††	A15, 2700K, 330 Lumen, E12	
	4.5W	9290002891††	A15, 2700K, 330 Lumen, E26	
	4.5W	457119 (9290011673)	Candle, 330Lm, E26	
	4.5W	457168 (9290011672)	G16.5, 330 Lm, E26	
	4.5W	457184 (9290011670)	Candle, 330Lm, E12	
	Philips	6W	9290002242	MR16, 3000K, 300 Lumen, GU10 base
		6W	456995 (9290011557)	R20, 2700K, 450 Lumen, Warm Glow
7W		9290002706	A19 SlimStyle, Daylight, 5000K, 450 Lumen, E26	
8W		9290002267	A19, 2700K, 470 Lumen	
8W		9290002295	A19, 5000K, 470 Lumen	
8W		9290002329	PAR20, 3000K, 470 Lumen, E26	
8.5W		9290002543	BR30, 5000K, 730 Lumen, 8.5W	
9.5W		9290011117	BR30, 2700K, 730 Lumen, WarmGlow to 2200K (Nov 2014 or later)	
9.5W		9290011118 (452359)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE	
9.5W		9290011118 (452383)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE	
9.5W		9290011118 (452417)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE	
9.5W		9290011119 (452441)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE	
9.5W		9290011119 (452466)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE	
9.5W		9290011119 (452482)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta® Wireless In-wall Dimmer PRO

Caséta Wireless In-wall Dimmer PRO: PD-10NXD

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Philips	10W	458828 (9290011816)	A19, 2700K, 800 Lumen, 60WE, E26
	10W	459339 (9290011898)	G25, 2700k, 800 Lumen, E26
	10.5W	9290002544	BR30, 2700K, 730 Lumen
	11W	9290002268	A19, 2700K, 830 Lumen
	11W	9290002296	A19, 5000K, 830 Lumen
	11W	9290011113	PAR30L, 3000K, ? Lumen, E26
	13W	9290002523 13PAR38/F25 3000 DIM AF RO	PAR38, 3000K, 950 Lumen
	14W	459065	A19, 2700K, 1100Lm, 75WE, E26
	14W	9290011839	A21, 2700K, 1100 Lumen, E26
	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26
	15W	9290011111	PAR38, 3000K, 1050 Lumen, E26, Flood
	15W	9290011112	PAR38, 5000K, 1050 Lumen, E26, Flood
	18W	9290011741	A21, 2700K, 1600Lumen, E26
	18W	459107 (9290011741)	A21, 2700K, 1600 Lumen, E26
	18W	459115 (9290011741)	A21, 2700K, 1600Lumen, E26
	18W	459123 (9290011741)	A21, 2700K, 1600Lumen, E26
	18W	459131 (9290011741)	A21, 2700K, 1600Lumen, E26
	19W	453340	A19, 2700K, 1620Lm, 100WE, E26
	Project Source	10W	DLS22-06B30D1E-WH-1
Satco	8W	S9140	R20, 2700K, 525 Lumen, E26
	8W	S9141	R20, 2700K, 525 Lumen, E26
	8W	S9142	R20, 2700K, 525 Lumen, E26
	8W	S9143	R20, 2700K, 525 Lumen, E26
	11W	S9084	PAR30, 3000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9085	PAR30, 4000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9086	PAR30, 3000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9087	PAR30, 4000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9088	PAR30, 3000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9089	PAR30, 4000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9090	PAR30, 3000K, 780 Lumen, E26, long neck, 40° Beam
	11W	S9091	PAR30, 4000K, 780 Lumen, E26, long neck, 40° Beam
	13W	S9410	PAR30S, 2700k, 950 Lumen, E26
	13W	S9415	PAR30S, 2700k, 950 Lumen, E26
	13W	S9439	PAR30S, 2700k, 950 Lumen, E26
	17W	S9092	PAR38, 3000K, 1200 Lumen, E26, 25° beam
	17W	S9093	PAR38, 4000K, 1200 Lumen, E26, 25° beam
	17W	S9094	PAR38, 3000K, 1200 Lumen, E26, 40° beam
	17W	S9095	PAR38, 4000K, 1200 Lumen, E26, 40° beam
	18W	S9455	PAR38, 3000K, 1400 Lumen, E26, Flood
18W	S9456	PAR38, 4000K, 1400 Lumen, E26, Flood	
Solais	7W	LRP20/25/27K	PAR20, 2700K, 475 Lumen, E26, 25° Beam
	7W	LRP20/25/30K	PAR20, 3000K, 500 Lumen, E26, 25° Beam
	7W	LRP20/40/27K	PAR20, 2700K, 475 Lumen, E26, 40° Beam
	7W	LRP20/40/30K	PAR20, 3000K, 500 Lumen, E26, 40° Beam
	11W	LR20/25/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, narrow flood
	11W	LR20/25/30K/750	PAR20, 3000K, 750 Lumen, E26, narrow flood
	11W	LR20/40/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, wide flood
	11W	LR20/40/30K/750/xx	PAR20, 3000K, 750 Lumen, E26, wide flood
	16W	LR30/10/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 10° Beam
	16W	LR30/10/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 10° Beam
	16W	LR30/10/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 10° Beam
	16W	LR30/15/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 15° Beam
	16W	LR30/15/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 15° Beam
	16W	LR30/15/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 15° Beam
	16W	LR30/25/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 25° Beam
	16W	LR30/25/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 25° Beam
16W	LR30/25/30K/1200/WH	PAR30, 3000K, 1200 Lumen, E26, short neck, 25° Beam	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless In-wall Dimmer PRO

Caséta Wireless In-wall Dimmer PRO: PD-10NXD

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Solais	16W	LR30/40/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 40° Beam
	16W	LR30/40/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 40° Beam
	16W	LR30/40/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 40° Beam
	16W	LRP38/25/27K	PAR38, 2700K, 1025 Lumen, E26, 25° Beam
	16W	LRP38/25/30K	PAR38, 3000K, 1100 Lumen, E26, 25° Beam
	16W	LRP38/40/27K	PAR38, 2700K, 1025 Lumen, E26, 40° Beam
	16W	LRP38/40/30K	PAR38, 3000K, 1100 Lumen, E26, 40° Beam
	20W	LR38/25/30K/1450/SL	PAR38, 3000K, 1450 Lumen, E26, 15° Beam
	28W	LR38/15/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/15/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	28W	LR38/25/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/25/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	28W	LR38/40/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/40/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	Sylvania	7W	79653 (LED7R20DIMSE830G3RP [LW])
7W		79659 (LED7R20/DIM/SE/830/G3)	R20, 3000K, 525 Lumen, E26,
8W		LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26
8W		LED8PAR16/DIM/930/FL36/P/LW	PAR16, Soft White, 390 Lumen
8W		LED8PAR16/GU10/DIM/930/FL36/RP	PAR16, GU10, Soft White, 390 Lumen
11W		79654 (LED11BR30DIMSE830G3RP[LW])	BR30, 3000K, 800 Lumen, E26
11W		79657 (LED11BR30/DIM/SE/830/G3)	BR30, 3000K, 800 Lumen, E26
11W		79660 (LED11BR30DIMSE830G3RP)	BR30, 3000K, 800 Lumen, E26
11W		LED11PAR20/DIM/930/FL30/P2	PAR20, Soft White, 550 Lumen
12W		LED12BR30/DIM/HO/827	BR30, 2700K, Medium base
12W		LED12BR30/DIM/HO/827/HVP	BR30, 2700K, Medium base
14W		74031 (LED14PAR38DIM850FL40GL1WRP)	PAR38, 5000K, 1050 Lumen, E26
14W		74032 (LED14PAR38DIM830NFL25GL1W)	PAR38, 3000K, 1050 Lumen, E26
14W		74034 (LED14PAR38DIM830FL40GL1W)	PAR38, 3000K, 1050 Lumen, E26
14W		74035 (LED14PAR38DIM830NFL25GL1W)	PAR38, 3000K, 1050 Lumen, E26
14W		74036 (LED14PAR38DIM830WSP15GL1W)	PAR38, 3000K, 1050 Lumen, E26
14W		74037 (LED14PAR38DIM827FL40GL1W)	PAR38, 2700K, 1050 Lumen, E26
14W	74065 (LED14PAR38DIM850FL40GL1WRP)	PAR38, 5000K, 1050 Lumen, E26	
14W	74066 (LED14PAR38DIM830FL40GL1WRP)	PAR38, 3000K, 1050 Lumen, E26	
14W	74067 (LED14PAR38DIM830FL40GL1WRP)	PAR38, 3000K, 1050 Lumen, E26	

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless In-wall Dimmer PRO

Caséta Wireless In-wall Dimmer PRO: PD-10NXD

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Sylvania	15W	79655 (LED15BR40DIMSE830G3RP [LW]) [†]	BR40, 3000K, 1100 Lumen, E26
	15W	79661 (LED15BR40DIMSE830G3RP) [†]	BR40, 3000K, 1100 Lumen, E26
	15W	LED15BR40/DIM/SE/830/G3 [†]	BR40, 3000K, 1100 Lumen, E26,
	17W	LED17PAR30LN/DIM/830/WSP15/P	PAR30, 3000K, 1200 Lumen, E26, spot
	17W	LED17PAR30LN/DIM/830/WSP20	PAR30, 3000K, 1200 Lumen, E26, wide spot
	20W	LED20PAR38/DIM/930/FL40/P2	PAR38, 3000K, 1000 Lumen,
	21W	LED21/PAR38/DIM/P/930/FL30/HVP	PAR38, Warm White, 3000K, 1100 Lumen, E26, 21W
TCP	12W	LED12P30D27KNFL	PAR30, 2700K, 800 Lumen, E26
	17W	LED17BR40D27K (LED17BR40D)	BR40, 2700K, 1200 Lumen, E26
	17W	LED17HOP38D27KNFL (LED17P38D1)	PAR38, 2700K, 1550 Lumen, E26, Narrow Flood
Utilitech	3W	LG161/2DM/IF/LED [†]	G16.5, Warm White, 3000K, 200 Lumen, E12 base, frosted
	4.5W	LR14DMLED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	4.8W	LA15DM/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, clear
	4.8W	LA15DM/IF/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, frosted
	4.8W	LA15DMC/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LCFFDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E12 base, frosted flame tip
	4.8W	LEFCDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E26 base, clear flame tip
	4.8W	LG161/2DM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LG161/2DM/IF/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, frosted
	4.8W	LGMDM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E26, clear
	5.5W	LMR16GU10DMLEDG2	MR16, 2700K, 350 Lumen, GU10, Flood
	6.5W	LMR16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	LMR16DMGU10 [†]	MR16, GU10 base
	6.5W	LR16DMLED [†]	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	8W	LCFCDM500LED [†]	Candle, 3000K, 500 Lumen, E12 candle base
	8W	LG25DM/LEDG2 [†]	G25, Warm White, 3000K, 510 Lumen, E26
	8W	LR20DMLEDG2	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	8.5W	LMR16DMGU10/500/LED [†]	MR16, Warm White, 3000K, 520 Lumen, GU10, 120V
	11W	DLS02-41127D1E-WF1	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	13W	DLS02-61327D1E-WF1	5" or 6" Downlight, Soft White, 2700K, 800 Lumen, E26 retrofit
	13W	DLS02-61350D1E-WF1	5" or 6" Downlight, Daylight, 5000K, 800 Lumen, E26 retrofit
	13W	DLS03-06E30D1E-WH-F1	Downlight 3000K 700 Lumens 65WE
	13W	LBR30DM/LEDG2	BR30
13.5W	LA19/OM800/LED	A19, 3000K, 800 Lumen, Omni Directional	
17W	BPCEBR40/DM/LED [†]	BR40	
17W	LBR40DM/LED [†]	BR40, 2700K, 1065 Lumen	
20W	DLS24-06C27D1E-WH-F1	5 or 6" Downlight 2700K 1200 Lumens 90WE	

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated March 18, 2016
 For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for Caséta[®] Wireless In-wall Dimmer PRO

Caséta Wireless In-wall Dimmer PRO: PD-10NXD

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
GE	26W	FLE26HT3/2/DV/SW	Spiral
	14W	4R2014TD	R20, TruDim, 2700K
TCP	14W	4R2014TD30K	R20, TruDim, 3000K
	14W	4R2014TD35K	R20, TruDim, 3500K
	14W	4R2014TD41K	R20, TruDim, 4100K
	14W	4R2014TD50K	R20, TruDim, 5000K
	14W	4R2014TD65K	R20, TruDim, 6500K

† Requires a minimum of 2 lamps
 †† Requires a minimum of 3 lamps
 © Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Cree	6W	BA19-04527OMB-12DE26-3_1	A19 4Flow, 83CRI, 2700K, 460 Lumen, E26
	6W	BA19-04527OMF-12DE26-1U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04527OMF-12DE26-2U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04527OMF-12DE26-3U100	A19 4Flow, 2700K, 460 Lumen, E26
	6W	BA19-04550OMB-12DE26-3_1	A19 4Flow, 83CRI, 5000K, 460 Lumen, E26
	6W	BA19-04550OMF-12DE26-2U500	A19, 5000K, 450 Lumen, 40WE, 4pk
	6W	BA19-04550OMF-12DE26-3U100	A19 4Flow, 5000K, 460 Lumen, E26
	9.5W	BA19-08027OMF-12DE26-2U100	A19, Soft White, 2700K, 800 Lumen, Medium base
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk
	9.5W	BBR30-06527FLF-12DE26-1U100	BR30, 650 Lumen, Soft White, 2700K
	9.5W	BBR30-06550FLF-12DE26-1U100	BR30, Daylight, 5000K 650 Lumen, 9.5W
	10.5W	BPAR30L-0853025C-12DE26-1C100	PAR30L, 3000K, 850 Lumen, 25° Spot
	10.5W	BPAR30L-0853040C-12DE26-1C100	PAR30L, 3000K, 850 Lumen, 40° Flood
	10.5W	BPAR30S-0853040C-12DE26-1C100	PAR30S, 3000K, 850 Lumen, 40° Flood
	16.5W	BPAR38-1503027T-12DE26-2U_00	PAR38, 3000K, 1510Lm, E26, Spot
	16.5W	BPAR38-1503047T-12DE26-2U_00	PAR38, 3000K, 1510Lm, E26, Flood
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W
	18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W
	18W	BPAR38-1503027T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 27 deg spot
	18W	BPAR38-1503047T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 47 deg flood
EcoSmart	6W	ECS 25 40WE W27 120 DG†	G25, 2700K, 400 Lumen, E12
	6W	ECS GP19 WW 40WE 120	A19, 3000K
	7W	ECS 25 60WE W27 120 DG†	G25, 2700K, E12
	7.5W	BPA15/CL/500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E26
	7.5W	BPA15C/CL500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E12
	7.5W	BPCFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E12
	7.5W	BPEFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E26
	7.5W	BPGM/CL/500/LED/ESM	G16.5, Soft White, 2700K, 500 Lumen, E26
	8W	ECS 20 CW FL 50WE 120†	PAR20, 5000K, 490 Lumen
	8W	ECS 20 WW FL 50WE 120†	PAR20, 3000K, 450 Lumen
	8W	ECS A19 CW 40WE 120†	A19, 5000K, 480 Lumen
	8W	ECS A19 WW 40WE 120†	A19, 3000K, 450 Lumen
	8W	ECS BR20 50WE CW 120 DG†	BR20, Daylight, 5000K, 600 Lumen, E26
	8W	ECS BR20 50WE W27 120†	BR20, Soft White, 2700K
	8W	ECS BR20 50WE WW 120 DG†	BR20, Warm White, 3000K, 550 Lumen, E26
	9W	5bSA800STQ1D02	A19, 3000K, 800Lm, E26, 4pk
	9W	A810SS-Q1D-01 (5bSA800STQ1D01)	A19, 2700K, 800Lm, E26
	9W	A810SS-Q1D-04 (5bSA800STQ1D03)	A19, 5000K, 840Lm, E26, 4pk
	9.5W	5bHPR650STW1D29	PAR30, 3000K, 650Lm, E26
	9.5W	5bHPR650STW1D30	PAR30, 3000K, 680Lm, E26
	9.5W	ECS DN4 CW E26 120	4" Downlight, Daylight, 5000K, 650 Lumen, E26, retrofit
	9.5W	ECS DN4 CW GU24 120	4" Downlight, Daylight, 5000K, 650 Lumen, GU24 base, retrofit
	9.5W	ECS DN4 W27 E26 120	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	9.5W	ECS DN4 W27 GU24 120	4" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit
	9.5W	ECS DN6 CW GU24 120	6" Downlight, Daylight, 5000K, 650 Lumen, GU24 base, retrofit
	9.5W	ECS DN6 W27 E26 120	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	9.5W	ECS DN6 W27 E26 120 2BX	6" Downlight, Soft White, 2700K, E26 retrofit, 2pk
	9.5W	ECS DN6 W27 E26 120 BX V3	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	9.5W	ECS DN6 W27 GU24 120	6" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit
	10W	DL-N14A10FR1-27	5/6" Downlight, 2700K, 650Lm, E26
10W	DL-N14A10FR1-50	5/6" Downlight, 5000K, 650Lm, E26	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers


List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
EcoSmart	10W	DL-N14A10FR2-27	5/6" Downlight, 2700K, 650Lm, GU24
	10W	DL-N14A10FR2-50	5/6" Downlight, 5000K, 650Lm, GU24
	10W	ECS BR30 65WE CW 120 DG†	BR30, Daylight, 5000K, 700 Lumen, E26
	10W	ECS BR30 65WE CW 120 DG 3PK†	BR30, Daylight, 5000K, 700 Lumen, E26, 3pk
	10W	ECS BR30 65WE W27 120 DG†	BR30, Soft White, 2700K, 650 Lumen, E26
	10W	ECS BR30 65WE W27 120 DG 3BX†	BR30, Soft White, 2700K, 650 Lumen, E26, 3pk
	10W	ECS BR30 65WE WW 120 DG†	BR30, Warm White, 3000K, 650 Lumen, E26
	10.5W	ECS 30 75WE WW GB FL 120	PAR30 Gimbal, 3000K, 750 Lumen, E26, 75WE
	10.5W	ECS 30 75WE xxx GB xx 120	PAR30 Gimbal, Various color temperatures, 75WE
	11W	5020901XXYY†	BR30, 2700K, 770 Lumens
	11W	ECS RFK6 65WE W27 120 REC†	Downlight, Soft White, 2700K, 600 Lumen, E26
	13W	5bHPR1000SW1D19	PAR38, 3000K, 900Lm, E26
	13W	5bHPR1000SW1D20	PAR38, 5000K, 1000Lm, E26
	15W	ECS 38 CW FL 90WE 120	PAR38, 5000K, 970 Lumen
	15W	ECS 38 WW FL 90WE 120	PAR38, 3000K, 900 Lumen
16W	ECS 38 90WE WW FL 120 TP	PAR38, Bright White, 3000K, 1000 Lumen, E26	
Energetic	17.5W	ELY17D-2BRW-VB	BR40, 2700K, 1100 Lumen
	4.8W	CFCDM/300/LED†	Candle, 3000K, 310 Lumen, Candelabra Base
	4.8W	EFCDM/300/LED†	Candle, 3000K, 310 Lumen, Medium Base
	6.5W	R16DM/LED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	8W	A19/DM/GU24/LED	A19, 3000K, GU24 Base
	8W	A19/DM/LED	A19, 3000K
	8W	A19/DM/LED/CAN	A19
	8W	A19/DM/LED/RP/CAN	A19
	8W	A19DM/5K/LED	A19, 5000K
	8W	BPCEA19/DM/LED	A19
	8W	BPCEG25/927/LED/3	G25, 2700K, 495 Lumen, E26
	8W	BPCER20/DM/LED	R20 (90mA ridged reflector version)
	8W	BPCER20/DM/LED	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	8W	R20/927/LED	R20, 2700K
	8W	R20/930/LED	R20, 3000K
8W	R20/950/LED	R20, 5000K,	
8W	R20/DM/LED	R20, 2700K, 450 Lumen (90mA ridged reflector version)	
8W	R20DM/LED/CAN	R20 (90mA ridged reflector version)	
8W	R20DM/LEDG2/CAN	R20, 2700K	
Feit	9.5W	BPCER20/DM/LED	PAR20
	9.5W	PAR20/5K/LEDG5	PAR20, 5000K
	9.5W	PAR20/5K/LEDG5/CAN	PAR20, 5000K
	9.5W	PAR20/LEDG5	PAR20, 3000K, 450 Lumen
	9.5W	PAR20/LEDG5/CAN	PAR20
	9.7W	CELEDRT4/927	4" Downlight, 2700K, 520 Lumen, E26
	9.7W	EDRT4/927	4" Downlight, 2700K, 520 Lumen, E26
	9.7W	LEDR4/827	4" Downlight, 2700K, 520 Lumen, E26
	9.7W	LEDR4/830	4" Downlight, 3000K, 520 Lumen, E26
	9.7W	LEDR4/850	4" Downlight, 5000K, 520 Lumen, E26
	9.7W	LEDRT4/940	4" Downlight, 4000K, 520 Lumen, E26
	10W	BPAG800/5K/LED	A19, 5000K
	10W	BPAG800/LED	A19, 3000K, 800 Lumen
	13W	BPCEBR30LED	BR30
	13.5W	A19/OM800/5K/LED	A19, 5000K, Omni Directional
13.5W	A19/OM800/LED	A19, 3000K, Omni Directional	
13.5W	BPCEA19/OM800/LED	A19, Omni Directional	
13.5W	BPCEA19/OM800/LED/CAN	A19, Omni Directional	
14W	LEDR56/830	Downlight, 3000K, 925 Lumen, retrofit kit	

† Requires a minimum of 2 lamps

† † Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description	
Feit	15W	BPCEPAR30/LEDG5	PAR30	
	15W	PAR30L/5K/LEDG5	PAR30, 5000K	
	15W	PAR30L/5K/LEDG5/CAN	PAR30, 5000K	
	15W	PAR30L/LEDG5	PAR30	
	15W	PAR30L/LEDG5/CAN	PAR30	
	16W	A19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional	
	16.8W	LEDR56/3K	5" or 6" Downlight, 3000K, 840 Lumen	
	17W	BPCEBR40/LED	BR40, 2700K, 1065 Lumen	
	18W	18PAR38/DM/LED	PAR38, 3000K	
	20W	20PAR38/LEDG5	PAR38	
	20W	BPCEPAR38/LEDG5	PAR38	
	20W	PAR38/5K/LEDG5	PAR38, 5000K	
	20W	PAR38/5K/LEDG5/CAN	PAR38, 5000K	
	20W	PAR38/LEDG5	PAR38	
	20W	PAR38/LEDG5/CAN	PAR38	
	21.5W	CELEDRT56/927/2	5/6" Downlight, 2700K, 1250 Lumen, E26	
	21.5W	LEDR56/827	5/6" Downlight, 2700K, 1250 Lumen, E26	
	21.5W	LEDR56/927/MP/4	5/6" Downlight, 2700K, 1250 Lumen, E26, 4 pack	
	21.5W	LEDR56HO/830	5/6" Downlight, 3000K, 1250 Lumen, E26	
	21.5W	LEDR56HO/850	5/6" Downlight, 5000K, 1250 Lumen, E26	
	22W	A/OM1600R/27K/LED	A21, 2700K, 1600 Lumen	
	22W	A/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen	
	22W	A/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen	
	GE	8W	LED8DA19/827	A19, 2700K, 450 Lumen, E26
		11W	LED11DA19RVL/TP†	A19, 2700K, 570 Lumen
11W		LED11DA19V2†	A19, 2700K, 800 Lumen	
12W		LED12DR30RVL/BK	BR30, Reveal	
12W		LED12DR30RVL/CDN	BR30, Reveal	
12W		LED12DR30RVL/TP	BR30, Reveal 2850K, 630 Lumen	
18W		LED18D38W827/15	PAR38, 2700K, E26, 15° Beam	
18W		LED18D38W827/25	PAR38, 2700K, E26, 25° Beam	
18W		LED18D38W827/40	PAR38, 2700K, E26, 40° Beam	
18W		LED18D38W830/15	PAR38, 3000K, 1400 Lumen, E26, 15° Beam	
18W		LED18D38W830/25	PAR38, 3000K, 1400 Lumen, E26, 25° Beam	
18W		LED18D38W830/40	PAR38, 3000K, 1400 Lumen, E26, 40° Beam	
18W		LED18D38W927/15	PAR38, 2700K, 1100 Lumen, E26, 15° Beam	
18W		LED18D38W927/25	PAR38, 2700K, 1100 Lumen, E26, 25° Beam	
18W		LED18D38W927/40	PAR38, 2700K, 1100 Lumen, E26, 40° Beam	
18W		LED18D38W930/15	PAR38, 3000K, 1200 Lumen, E26, 15° Beam	
18W		LED18D38W930/25	PAR38, 3000K, 1200 Lumen, E26, 25° Beam	
18W		LED18D38W930/40	PAR38, 3000K, 1200 Lumen, E26, 40° Beam	
Halco	20W	PAR38FL20/827/LED	PAR38, 2700K, 1150 Lumen Flood	
	20W	PAR38FL20/830/LED	PAR38, 3000K, 1200 Lumen Flood	
	20W	PAR38FL20/840/LED	PAR38, 4000K, 1250 Lumen Flood	
	20W	PAR38FL20/850/LED	PAR38, 5000K, 1300 Lumen Flood	
	20W	PAR38NFL20/827/LED	PAR38, 2700K, 1150 Lumen Flood	
	20W	PAR38NFL20/830/LED	PAR38, 3000K, 1200 Lumen Flood	
	20W	PAR38NFL20/840/LED	PAR38, 4000K Flood	
	20W	PAR38NFL20/850/LED	PAR38, 5000K, 1300 Lumen Flood	
	20W	PAR38SP20/827/LED	PAR38, 2700K, 1150 Lumen Spot	
	20W	PAR38SP20/830/LED	PAR38, 3000K, 1200 Lumen Spot	
Halo	20W	PAR38SP20/840/LED	PAR38, 4000K Spot	
	20W	PAR38SP20/850/LED	PAR38, 5000K, 1300 Lumen Spot	
	12.2W	SLD405830WHR	4" Downlight, 3000K, 650 Lumen, E26 kit	
	12.2W	SLD405xxxx	4" Downlight, 710-800 Lumen, 12W to 12.2W	
	12.2W	SLD606830WHR	5"/6" Downlight, 3000K, 675 Lumen, E26 kit	
12.2W	SLD606xxxx	5"/6" Downlight, 780-800 Lumen, 12.2W to 13.2W		

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers


List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Halo	14.8W	SLD612827WHUNVJB†	6" Downlight, 2700K, 1100 Lumen, E26
	14.8W	SLD612830WHUNVJB†	6" Downlight, 3000K, 1150 Lumen, E26
	14.8W	SLD612835WHUNVJB†	6" Downlight, 3500K, 1200 Lumen, E26
	14.8W	SLD612840WHUNVJB†	6" Downlight, 4000K, 1215 Lumen, E26
	14.8W	SLD612927WHUNVJB†	6" Downlight, 2700K, 880 Lumen, E26
	14.8W	SLD612930WHUNVJB†	6" Downlight, 3000K, 925 Lumen, E26
	14.8W	SLD612935WHUNVJB†	6" Downlight, 3500K, 965 Lumen, E26
	14.8W	SLD612940WHUNVJB†	6" Downlight, 4000K, 1000 Lumen, E26
	15.2W	SLD612827WH	Downlight, 2700K, 1200Lm, E26
	15.2W	SLD612830WH	Downlight, 3000K, 1200Lm, E26
	15.2W	SLD612835WH	Downlight, 3500K, 1200Lm, E26
	15.2W	SLD612840WH	Downlight, 4000K, 1200Lm, E26
	15.2W	SLD612927WH	Downlight, 2700K, 1200Lm, E26
	15.2W	SLD612930WH	Downlight, 3000K, 1200Lm, E26
	15.2W	SLD612935WH	Downlight, 3500K, 1200Lm, E26
15.2W	SLD612940WH	Downlight, 4000K, 1200Lm, E26	
Lighting Science	10.5W	LS 30 75WE xxx GB xx 120	PAR30, various color temperatures
	13W	LS GLP6 W27 120 WH S1 BX	6" Downlight, 2700K, E26 retrofit
Litetrionics	14W	LP14550FL2D	BR30, 2700K, 925 Lumen
	14W	LP14550FL4D	BR30, 3000K, 925 Lumen
	14W	LP14550FL6D	BR30, 4000K, 925 Lumen
Megaman	10.5W	LR5210.5DDG-WFL-E26-27K	PAR30S, 2700K, 800Lm, E26
Osram	13W	73396 (LEDRT56900827FL80)	5/6" Downlight, 2700K, 900 Lumen, E26
	4.5W	457119 (9290011673)	Candle, 330Lm, E26
	4.5W	457168 (9290011672)	G16.5, 330 Lm, E26
	4.5W	457184 (9290011670)	Candle, 330Lm, E12
	6.5W	9290011347 (455741)	A19, Warm Glow, 450 Lumen
	7W	9290002706	A19 SlimStyle, Daylight, 5000K, 450 Lumen, E26
	8W	9290002267	A19, 2700K, 470 Lumen
	8W	9290002295	A19, 5000K, 470 Lumen
	8W	9290002329	PAR20, 3000K, 470 Lumen, E26
	8W	9290002330	PAR20
	8W	9290002331	PAR20
	8W	9290002332	PAR20
	8W	9290002333	PAR20
	8W	9290002334	PAR20
	8W	9290002335	PAR20
	8.5W	9290002543	BR30, 5000K, 730 Lumen, 8.5W
	8.5W	9290011116	BR30, 5000K, 730 Lumen, E26
	9W	9290011346 (455873)	A19, Daylight, 5000K, 800 Lumen, E26
	9.5W	9290011117	BR30, 2700K, 730 Lumen, WarmGlow to 2200K (Nov 2014 or later)
	9.5W	455840 (9290011345)	A19, Soft White, 2200-2700K, 800 Lumen, E26
	9.5W	9290011118 (452359)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452383)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452417)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452441)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452466)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452482)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	10.5W	9290002544	BR30, 2700K, 730 Lumen
	10.5W	9290002707	A19 SlimStyle, Soft White, 2700K, 800 Lumen, 3pk
	11W	9290002268	A19, 2700K, 830 Lumen
	11W	9290002296	A19, 5000K, 830 Lumen
	11W	9290011113	PAR30L, 3000K, ? Lumen, E26
	12W	9290002580 (431392)	BR40, 2700K, 800 Lumen
	13W	9290011120	A21 SlimStyle, 2700K, 1100 Lumen

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers


List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Philips	13W	9290002523 13PAR38/F25 3000 DIM AF RO	PAR38, 3000K, 950 Lumen
	15W	9290002426	A21, 2700K, 1180 Lumen
	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26
	15W	9290011111	PAR38, 3000K, 1050 Lumen, E26, Flood
	15W	9290011112	PAR38, 5000K, 1050 Lumen, E26, Flood
	18W	9290011741	A21, 2700K, 1600Lumen, E26
	18W	459107 (9290011741)	A21, 2700K, 1600 Lumen, E26
	18W	459115 (9290011741)	A21, 2700K, 1600Lumen, E26
	18W	459123 (9290011741)	A21, 2700K, 1600Lumen, E26
	18W	459131 (9290011741)	A21, 2700K, 1600Lumen, E26
	19W	9290002473	PAR38, 3000K, 1250 Lumen
	19.5W	9290002251	PAR38, 3000K, 1210 Lumen
	19.5W	9290002252	PAR38, 2700K, 1183 Lumen
	19.5W	9290002253	PAR38, 3000K, 1212 Lumen
	19.5W	9290002291	PAR38, 4000K, 1207 Lumen
	19.5W	9290002312	PAR38, 2700K, 1100 Lumen
	19.5W	9290002313	PAR38, 2700K, 1196 Lumen
	19.5W	9290002314	PAR38, 3000K, 1200 Lumen
	19.5W	9290002315	PAR38, 3000K, 1225 Lumen
	19.5W	9290002316	PAR38, 4000K, 1200 Lumen
	19.5W	9290002317	PAR38, 4000K, 1245 Lumen
	19.5W	9290002321	PAR38, 2700K, 1172 Lumen
19.5W	9290002322	PAR38, 5000K, 1300 Lumen	
22W	9290002290	A21, 2700K, 1780 Lumen, Medium base	
Satco	8W	S9140	R20, 2700K, 525 Lumen, E26
	8W	S9141	R20, 2700K, 525 Lumen, E26
	8W	S9142	R20, 2700K, 525 Lumen, E26
	8W	S9143	R20, 2700K, 525 Lumen, E26
	10.5W	S9037	A19, 2700K, 810 Lumen, E26
	10.5W	S9038	A19, 3500K, 830 Lumen, E26
	10.5W	S9039	A19, 5000K, 870 Lumen, E26
	11W	S9084	PAR30, 3000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9085	PAR30, 4000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9086	PAR30, 3000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9087	PAR30, 4000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9088	PAR30, 3000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9089	PAR30, 4000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9090	PAR30, 3000K, 780 Lumen, E26, long neck, 40° Beam
	11W	S9091	PAR30, 4000K, 780 Lumen, E26, long neck, 40° Beam
	15W	S9440	PAR38, 2700k, 1100 Lumen, E26
	15W	S9445	PAR38, 2700k, 1100 Lumen, E26
	15W	S9454	PAR38, 2700k, 1100 Lumen, E26
	17W	S8977-S8979	PAR38
	17W	S8984-S8986	PAR38
17W	S9092	PAR38, 3000K, 1200 Lumen, E26, 25° beam	
17W	S9093	PAR38, 4000K, 1200 Lumen, E26, 25° beam	
17W	S9094	PAR38, 3000K, 1200 Lumen, E26, 40° beam	
17W	S9095	PAR38, 4000K, 1200 Lumen, E26, 40° beam	
Solais	7W	LRP20/25/27K	PAR20, 2700K, 475 Lumen, E26, 25° Beam
	7W	LRP20/25/30K	PAR20, 3000K, 500 Lumen, E26, 25° Beam
	7W	LRP20/40/27K	PAR20, 2700K, 475 Lumen, E26, 40° Beam
	7W	LRP20/40/30K	PAR20, 3000K, 500 Lumen, E26, 40° Beam
	11W	LR20/25/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, narrow flood
	11W	LR20/25/30K/750	PAR20, 3000K, 750 Lumen, E26, narrow flood
	11W	LR20/40/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, wide flood
	11W	LR20/40/30K/750/xx	PAR20, 3000K, 750 Lumen, E26, wide flood
16W	LR30/10/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 10° Beam	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description	
Solais	16W	LR30/10/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 10° Beam	
	16W	LR30/10/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 10° Beam	
	16W	LR30/15/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 15° Beam	
	16W	LR30/15/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 15° Beam	
	16W	LR30/15/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 15° Beam	
	16W	LR30/25/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 25° Beam	
	16W	LR30/25/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 25° Beam	
	16W	LR30/25/30K/1200/WH	PAR30, 3000K, 1200 Lumen, E26, short neck, 25° Beam	
	16W	LR30/40/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 40° Beam	
	16W	LR30/40/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 40° Beam	
	16W	LR30/40/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 40° Beam	
	16W	LRP38/25/27K	PAR38, 2700K, 1025 Lumen, E26, 25° Beam	
	16W	LRP38/25/30K	PAR38, 3000K, 1100 Lumen, E26, 25° Beam	
	16W	LRP38/40/27K	PAR38, 2700K, 1025 Lumen, E26, 40° Beam	
	16W	LRP38/40/30K	PAR38, 3000K, 1100 Lumen, E26, 40° Beam	
	20W	LR38/25/30K/1450/SL	PAR38, 3000K, 1450 Lumen, E26, 15° Beam	
	28W	LR38/15/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
	28W	LR38/15/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
	28W	LR38/25/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
	28W	LR38/25/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
	28W	LR38/40/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
	28W	LR38/40/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
	Switch	10W	A260FUS27B1	A19, 800 Lumen
	Sylvania	6W	79643	A19, Soft White, 2700K, 450 Lumen, E26, clear
		7W	79120	PAR20, 2700K, 500 Lumen, E26
		7W	79653 (LED7R20DIMSE830G3RP [LW])	R20, 3000K, 525 Lumen, E26,
		7W	79659 (LED7R20/DIM/SE/830/G3)	R20, 3000K, 525 Lumen, E26,
		7W	LED7A19/DIM/0/SE/830 (78214)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
7W		LED7A19/DIM/0/SE/830/RP (78213)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect	
8W		LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26	
8W		LED8PAR16/DIM/930/FL36/P/LW	PAR16, Soft White, 390 Lumen	
8W		LED8PAR16/GU10/DIM/930/FL36/RP	PAR16, GU10, Soft White, 390 Lumen	
8W		LED8R20/DIM/SE/830/RP	R20, Soft White, 2700K to 2000K, 520 Lumen	
10W		LED/600/RT4/830/FL80/RP	Recessed lighting kit, 3000K, 600 Lumen	
10W		LED/RT4/600/827/FL80	Recessed lighting kit, 2700K, 600 Lumen	
10W		LED/RT6/700/830/SE/1PK (73195-0)	6" Downlight, 3000K, 700 Lumen, E26, Retro-fit	
10W		LED10A19/DIM/0/SE/830	A19, 3000K, 800 Lumen	
10W		LED10A19/DIM/0/SE/830/RP (78215)	A19, 3000K, 800 Lumen	
10.5W		LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE	
10.5W		LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE	
10.5W		LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE	
10.5W		LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE	
10.5W		LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE	
10.5W	LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE		
10.5W	LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE		
11W	73195-0	Downlight		
11W	73497-0	Downlight		

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers


List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Sylvania	11W	79654 (LED11BR30DIMSE830G3RP[LW])	BR30, 3000K, 800 Lumen, E26
	11W	79657 (LED11BR30/DIM/SE/830/G3)	BR30, 3000K, 800 Lumen, E26
	11W	79660 (LED11BR30DIMSE830G3RP)	BR30, 3000K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3 (78413)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (78415)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (79121)	BR30, 2700K, 800 Lumen, E26
	12W	72578 (LEDRT56700927FL80CEC)	5/6" Downlight, 2700K, 900 Lumen, GU24
	12W	72579-0	5/6" Downlight, 3000K, 900 Lumen, GU24
	12W	72593-0	5/6" Downlight, 4000K, 900 Lumen, GU24
	12W	LED12BR30/DIM/HO/827	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/HO/827/HVP	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/SE/830/RP	BR30, Soft White, 2700K to 2000K, 850 Lumen
	13W	73397-1	5/6" Downlight, 3000K, 900 Lumen, E26
	13W	73422-1	5/6" Downlight, 3000K, 900 Lumen, E26
	13W	73675-0	4/5/6" Downlight, 3000K, 900 Lumens, E26
	13W	73676-0	4/5/6" Downlight, 3000K, 900 Lumens, E26
	13W	LEDLD900830FL120	4/5/6" Downlight, 3000K, 900 Lumens, E26
	15W	79655 (LED15BR40DIMSE830G3RP [LW])	BR40, 3000K, 1100 Lumen, E26
	15W	79661 (LED15BR40DIMSE830G3RP)	BR40, 3000K, 1100 Lumen, E26
	15W	LED15BR40/DIM/HO/827/G3/RP	BR40, Soft White, 2700K, 1100 Lumen, E26, Flood
	15W	LED15BR40/DIM/SE/830/G3	BR40, 3000K, 1100 Lumen, E26,
	16W	LED16BR40DIMHO827	BR40, 2700K, 1100Lumen
	17W	LED17PAR30LN/DIM/830/WSP15/P	PAR30, 3000K, 1200 Lumen, E26, spot
	17W	LED17PAR30LN/DIM/830/WSP20	PAR30, 3000K, 1200 Lumen, E26, wide spot
	20W	LED20PAR38/DIM/930/FL40/P2	PAR38, 3000K, 1000 Lumen,
	20W	LED20PAR38DIM830FL40	PAR38, 3000K, 1300 Lumen
	21W	LED21/PAR38/DIM/P/930/FL30/HVP	PAR38, Warm White, 3000K, 1100 Lumen, E26, 21W
	TCP	12W	LED12P30D27KNFL
17W		LED17BR40D27K (LED17BR40D)	BR40, 2700K, 1200 Lumen, E26
17W		LED17HOP38D27KNFL (LED17P38D1)†	PAR38, 2700K, 1550 Lumen, E26, Narrow Flood
17W		LED17P38D24KNFL	PAR38, 2400K, 1105 Lumen, E26
Toshiba	13W	LDRB1327WE6USD2 (13BR40/27K-T)	BR40, 2700K, 950 Lumen
	13W	LDRB1340WE6USD2 (13BR40/40L-T)	BR40, 4000K, 1050 Lumen
Utilitech	5.5W	LMR16GU10DMLEDG2	MR16, 2700K, 350 Lumen, GU10, Flood
	6.5W	LR16DMLED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	LA19DM/GU24/LED	A19, 3000K, GU24
	7.5W	LA19DM/LED	A19, 3000K, 450 Lumen, E26
	8W	LA19DM/5K/LED	A19, 5000K
	8W	LCFCDM500LED	Candle, 3000K, 500 Lumen, E12 candle base
	8W	LG25DM/LEDG2†	G25, Warm White, 3000K, 510 Lumen, E26
	8W	LR20DM/LED	R20, 2700K, 450 Lumen (90mA ridged reflector version)
	8W	LR20DMLEDG2	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	8.5W	LMR16DMGU10/500/LED	MR16, Warm White, 3000K, 520 Lumen, GU10, 120V
	8.5W	LPAR20LEDG72	PAR20, 500 Lumen, 2PK

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers


List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Utilitech	9W	LR20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9W	R20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9.5W	LPAR20/5K/LEDG5	PAR20, 5000K, 500 Lumen
	9.5W	LPAR20/LEDG5	PAR20, 3000K, 450 Lumen
	9.5W	LPAR20DM/SP/LED	PAR20, 3000K, 465 Lumen, Spot
	9.8W	LA19DM/800/LED/G2	A19, 3000K, 800 Lumen
	10W	LA19DM/800/5K/LEDG2	A19, 5000K
	10W	LA19DM/800/LEDG2	A19, 3000K, 800 Lumen
	11W	DLS02-41127D1E-WF1	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	12W	LPAR30L/LEDG7/2	PAR30L, 3000K, 800 Lumen, E26, long neck, 2PK
	13W	BPCEBR30/927/LED	BR30, 750 Lumen, E26
	13W	BR30/927/LED	BR30, 750 Lumen, E26
	13W	BR30/927/LED/CAN	BR30, 750 Lumen, E26
	13W	BR30/DM/LEDG2	BR30, 750 Lumen, E26
	13W	BR30DM/LED/CAN	BR30, 750 Lumen, E26
	13W	DLS02-61327D1E-WF1	5" or 6" Downlight, Soft White, 2700K, 800 Lumen, E26 retrofit
	13W	DLS02-61350D1E-WF1	5" or 6" Downlight, Daylight, 5000K, 800 Lumen, E26 retrofit
	13W	DLS03-06E30D1E-WH-F1	Downlight 3000K 700 Lumens 65WE
	13W	LBR30DM/LEDG2	BR30
	13.5W	LA19/OM800/LED	A19, 3000K, 800 Lumen, Omni Directional
	15W	LBR30HO/LED/G2	BR30, Soft White, 1150 Lumen
	15W	LPAR30L/5K/LEDG5	PAR30, 5000K, 800 Lumen, long neck flood
	15W	LPAR30L/LEDG5	PAR30, 3000K, 790 Lumen, long neck flood
	15W	LPAR30LDM/SP/LED	PAR30, 3000K, 790 Lumen, long neck, spot
	15W	LPAR30S/LEDG5	PAR30, 3000K, 750 Lumen, short neck flood
	16W	LA19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional
	16W	LBR40DM/LEDG2	BR40, 1065 Lumen, E26
	16W	LBR40DMLEDG2	BR40, 2700K, 1065 Lumen
	16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK
	17.5W	YGA08A35-17.5W-827	BR40, 2700K, 1100 Lumen
	20W	DLS24-06C27D1E-WH-F1	5 or 6" Downlight 2700K 1200 Lumens 90WE
	20W	L20PAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood
	20W	LBR40HO/LED/G2	BR40, Soft White, 1400 Lumen
	20W	LPAR38/5K/LEDG5	PAR38, 5000K, 1000 Lumen, flood
	20W	LPAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood
	20W	LPAR38DM/SP/LED	PAR38, 3000K, 1000 Lumen, Spot
	20.5W	LPAR381400LEDG72	PAR38, 1450 Lumen, 2PK
	22W	LA/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen
	22W	LA/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen
	23W	LPAR38/1400/5K/LEDG5	PAR38, 5000K, 1400 Lumen
	23W	LPAR38/1400/LEDG5	PAR38, 3000K, 1400 Lumen
	Westinghouse	17W	33014
17W		33064	PAR38, 3000K, 1200 Lumen, flood

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266K

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers


List Updated March 18, 2016
For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W




Brand	Wattage	Model	Description
EcoSmart	5W	8TC05	Candle, (ES5CCDF052, ES9CCDF052)
	5W	8TC05F	Candle, Torpedo Tip, 2700K, 200 Lumen
	5W	8TFC05F	Candle, Flame Tip, 2700K, 200 Lumen
	23W	40123	Spiral, Soft White (ES5M823DIM2)
GE	26W	FLE26/2/DVR/40	R40
Sylvania	5W	CF5EL/B10/827/L/DIM	Candle
	5W	CF5EL/B10C/DIM/827/ADP	Candle
	5W	CF5EL/DEC/DIM	Candle
TCP	3W	8T03CL	Candle Clear
	5W	8TC05F	Candle
	5W	8TFC05F	Candle, flame tip
	8W	8A08WH	A-bulb
	23W	40123	Spiral

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266K


Appendix

Dial on the Ariadni®/Diva®/Lumea®/Skylark Contour®/Toggler® 150W C·L dimmer to adjust the low-end trim


Ariadni/Toggler

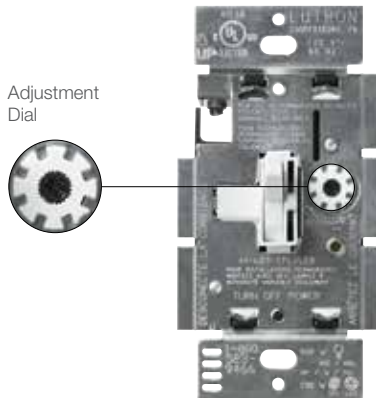


Diva

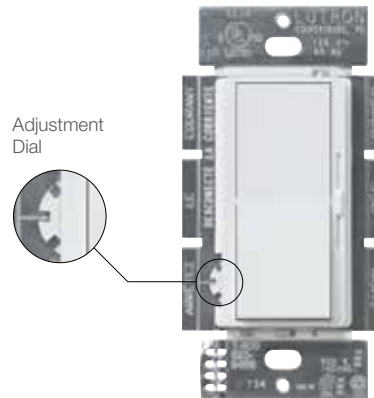

Lumea

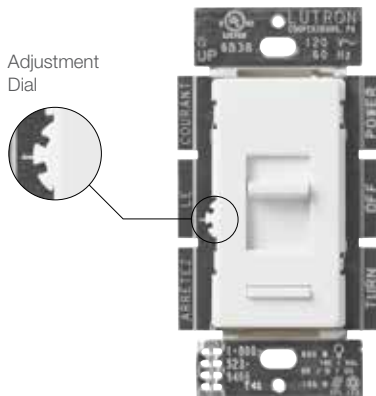

Skylark Contour

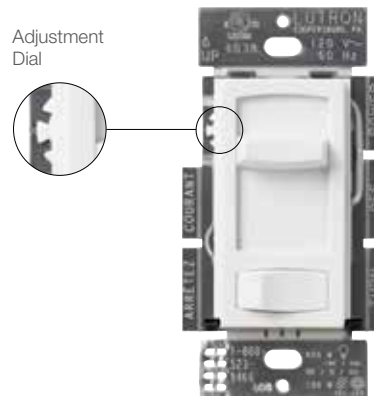

Go back

www.lutron.com

World Headquarters 1.610.282.3800 | 24/7 Technical Support 1.800.523.9466 | Customer Service 1.888.LUTRON1 (1.888.588.7661)

© Lutron Electronics Co., Inc. | P/N 368-3266 REV K