




Garden Treasures® is a registered trademark of LF, LLC. All rights reserved.

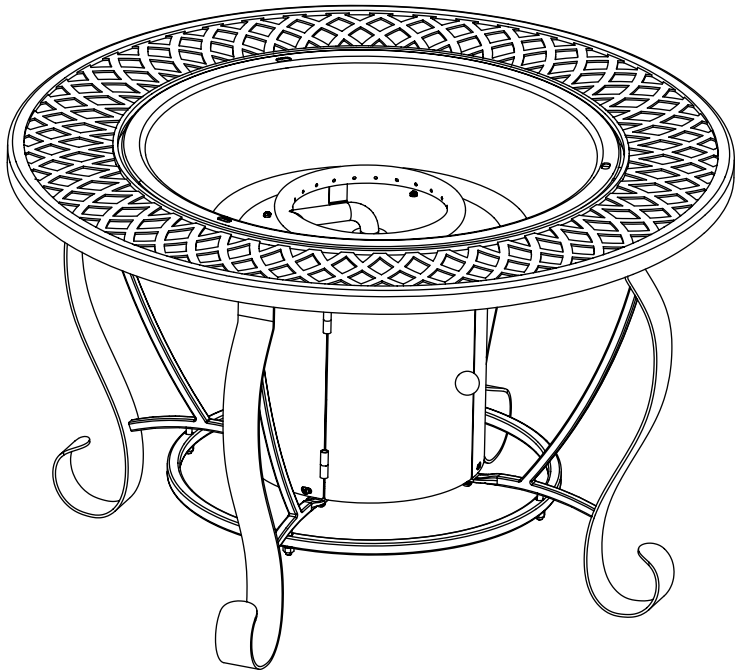

ITEM #0574294

STEEL GAS FIREPIT

MODEL #66388P



DANGER

If you smell gas:

- 1. Shut off gas to the appliance.
- 2. Extinguish any open flame.
- 3. If odor continues, keep away from the appliance and immediately call your gas supplier or fire department.



WARNING

Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance. An LP-cylinder not connected for use shall not be stored in the vicinity of this or any other appliance.



WARNING

For outdoor use only.

OPERATING INSTRUCTIONS

Perform leak test in a well-ventilated area outside and where no source of spark can occur. Connect propane gas tank to regulator. Turn the on/off valve at the unit to the "OFF" position to pressurize the control system. Use a soapy water solution to check all the connections for leaks before attempting to light the appliance. If a leak is found or you smell gas, disconnect propane gas tank and turn valve off and do not use the appliance until repairs can be made. DO NOT cover firepit directly after flame is out. Wait 5 minutes for firepit to cool prior to placing lid on firepit. Observe flame height when lit; flame should be a yellow/blue color between 1 inch to 7.5 inches high.

CARE AND MAINTENANCE

- Disconnect propane gas tank from appliance before performing any maintenance.
- Mantenga the firepit free and clear from combustible materials.
- Visually inspect burner from obstructions and keep tank enclosure free and clear from debris.
- After the burner and pumice stones are completely cooled down, use a soft brush to get rid of the mild stains, loose dirt and soil. Wipe with a soft cloth.
- Stubborn stains, discoloration and possibly rust pitting can occur from exposure to harsh outdoor conditions.
- Be careful not to let any powder or solvent come in contact with painted or plastic components as damage may occur.
- Store the firepit in a cool, dry place away from direct sunlight.
- The propane gas tank must be disconnected and removed from the firepit before the appliance can be stored indoors.
- Use manufacturer approved or supplied parts and accessories only. Otherwise, it may void the warranty of this product and result in a hazardous condition.
- Place lid (l) on firepit when not in use.



Design certified under ANS Z21.97 - CSA 2.41-(2012) Requirements for Outdoor Gas Fireplaces



CARBON MONOXIDE HAZARD

This appliance can produce carbon monoxide which has no odor.

Using it in an enclosed space can kill you.

Never use this appliance in an enclosed space such as a camper, tent, car or home.

ATTACH YOUR RECEIPT HERE

Serial Number \_\_\_\_\_ Purchase Date \_\_\_\_\_



Questions, problems, missing parts? Before returning to your retailer, call our customer service department at 1-800-643-0067, 8 a.m. - 8 p.m., EST, Monday - Friday.

