



A KOHLER COMPANY

ADVANTAGE™

## Features


- Compression molded from Sterling's exclusive solid VIKRELL® material
- Modular 4-piece design
- Lightly pebbled bottom surface for sure footing
- Tongue-and-groove "snap together" design allows for easy installation
- Durable swirl gloss finish
- 10 year consumer/3 year commercial limited warranty
- 36" (91.4 cm) x 35-1/4" (89.5 cm) x 73-1/4" (186.1 cm) complete unit rough-in dimensions include flange
- 36" (91.4 cm) x 34" (86.4 cm) x 72" (182.9 cm) complete unit finished dimensions

## Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASTM E84
- ANSI Z124.1
- IAPMO/UPC
- HUD, UM Bulletin 73A
- NAHB Research Foundation, Inc.

## 36" (91.4 cm) SHOWER RECEPTOR AND WALL SURROUND 62020100

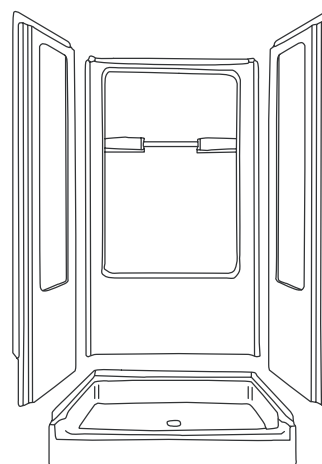

## Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

## Specified Model

Model	Complete Unit Description	Colors/Finishes	
62020100	36" (91.4 cm) shower receptor and wall surround	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____

Model	Wall Component Description	Colors/Finishes	
62022100	Back wall	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
62013110	Left end wall	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
62013120	Right end wall	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
62015100	End wall set	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____

## SterlingPlumbing.com

Visit us online for fixture color choices, detailed product information, color photos, installation instructions, care guides, and warranties. Sterling offers additional lines of plumbing products to complement the Sterling product you've chosen. Sign up for the Sterling monthly e-newsletter which showcases our latest product innovations. You may also call our Sterling Plumbing Answer Center from within the USA at 1-888-STERLING in addition to consulting with your local dealer. Sterling. Strong. Professional. Design.

## Technical Information

Model	door maximum width	door maximum height
62020100	33-1/2" (85.1 cm)	67" (170.2 cm)

## Installation Notes


Install this product according to the installation guide.

Size the drain cutout to fit the drain assembly that will be used.

End stud positioning is critical if nailing-in flanges are to be used.


Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown for roofing nail installation.

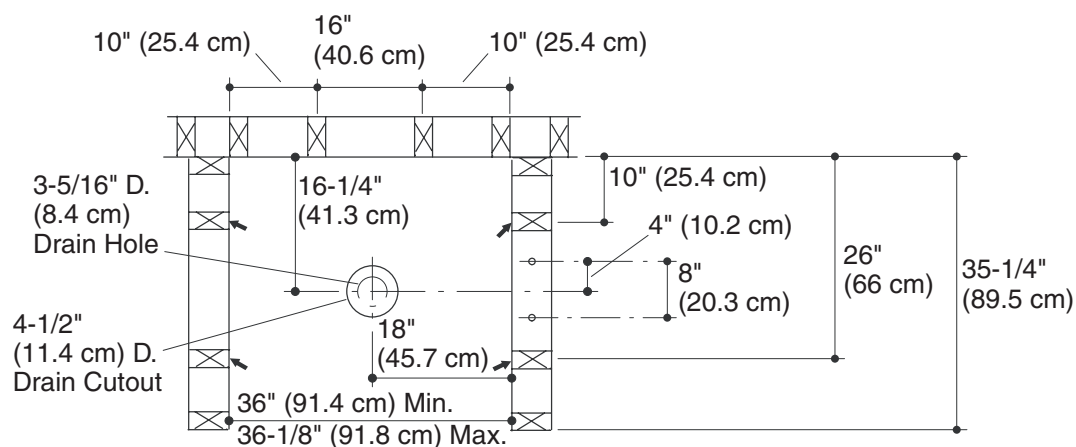

Recommended Roofing Nail Locations (4 total)

62020100

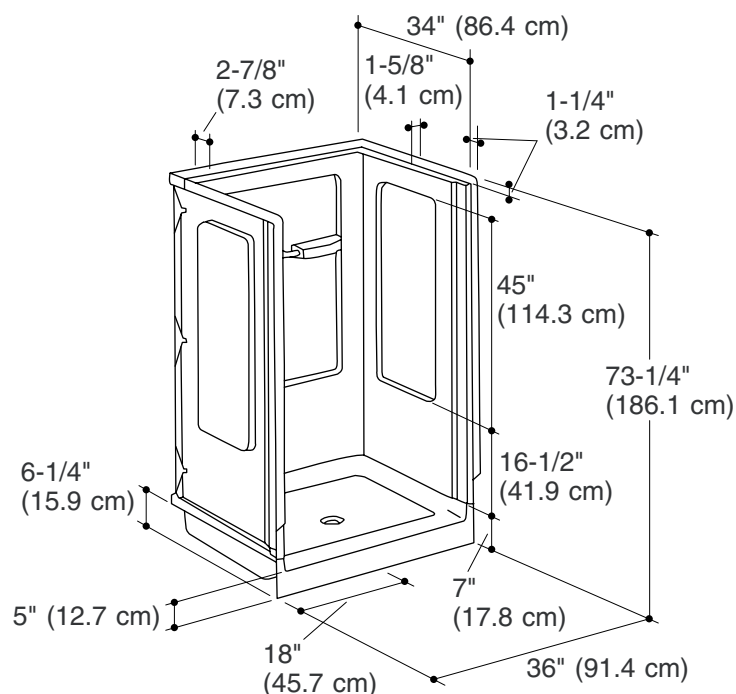

## Product Diagram