



Elara™ 6636

WHIRLPOOL BATH with CHROMATHERAPY

EF00 Elara™ 6636 Whirlpool Bath, Left Hand

EF05 Elara™ 6636 Whirlpool Bath, Right Hand

Elara™ 6636

WHIRLPOOL BATH with ILLUMATHERAPY™

EF10 Elara™ 6636 Whirlpool Bath, Left Hand

EF15 Elara™ 6636 Whirlpool Bath, Right Hand

- Right and Left Hand Drain Location
- Accessories / Hardware:
 - TheraPro™ Jet Rings Kit: #D095
 - AccuPro™ Jet Rings Kit: # P556
 - Sch 40, Rotoary Drain Kit: #DA34
- Trim Kit Finishes Available:
 - (827) – Chrome
 - (898) – Brushed Chrome
 - (815) – Satin Nickel
 - (829) – Bright Brass
 - (805) – Platinum
 - (826) – Brushed Nickel
 - (845) – Oil Rubbed Bronze

INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Technical Specifications

DIMENSIONS

66" L x 36" W x 23-1/2" H
(1676) mm L x (914) mm W x (597) mm H

DRAIN/OVERFLOW

A: 18-1/2" (470 mm) B: 10.6" (269 mm)

CUTOUT

64" x 34" & undermount template DQ51000

TOTAL WEIGHT

1039 lb. (471 kg) / 63 lb/ft² (308 kg/m²)

OPERATING GALLONAGE

79 U.S. Gal. (299 Liters)
Min. 75 U.S. Gal. (284 Liters)
Max. 83 U.S. Gal. (314 Liters)

PRODUCT WEIGHT

200 lb (91 kg)

SKIRT MOUNTING

Not Available

ELECTRICAL SPECIFICATIONS

Requires a dedicated GFCI protected separate circuit.



Motor/Pump: 120 VAC, 20 AMP, 60 Hz.

RapidHeat™: 120 VAC, 15 AMP, 60 Hz.


HEATER (STANDARD)

Requires a dedicated GFCI protected separate circuit.


RapidHeat™: P/N S750000

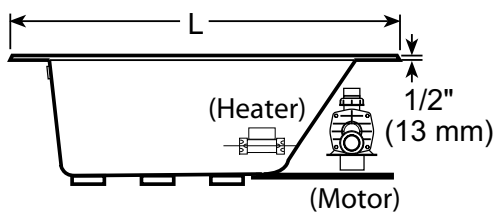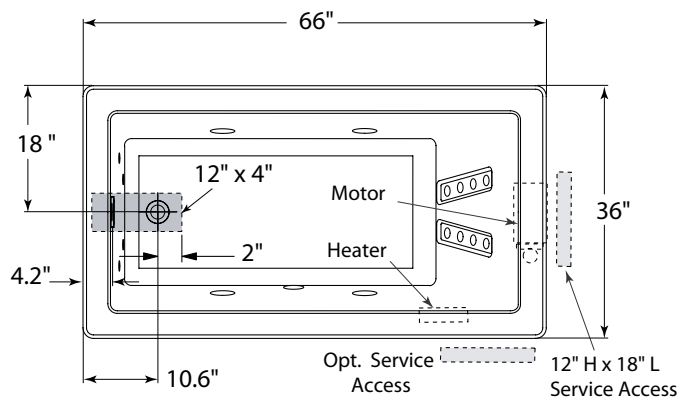

SIDE VIEW

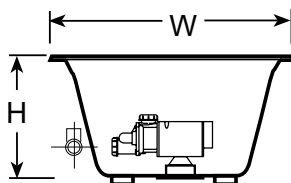

END VIEW



DRAIN/OVERFLOW