# **Fuzion 7260 Dual Whirlpool**

Product Codes beginning with: FUZ7260WCD

Also applies to products sold under part numbers: EG70, KQ15, EG85, KQ25, KQ30, KQ35, KQ35, KQ40, KQ45

TECHNICAL SPECIFICATIONS		
	English	Metric
Outer Dimensions	71 3/4" L x 59 3/4" W x 24" H	1822 mm L x 1518 mm W x 610 mm H
Interior Dimensions (bottom of bath) L x W (Mid) x W (End)	49 1/2" L x 42" W x 42" W	1257 mm L x 1067 mm W x 1067 mm W
Drain/Pump Configuration	Center drain, Left and right pumps	Center drain, Left and right pumps
Bath Weight (empty)	242 lbs	110 kg
Total Weight/Floor Loading	1,825 lbs 61.3 lbs/ft <sup>2</sup>	829 kg 299.1 kg/m <sup>2</sup>
Operating Gallonage (min-max)	110 (min) 148 (max) U.S. Gals	417 (min) 560 (max) L
Electrical Specifications	Each component requires a separate, dedicated GCFI protected circuit(s)	
Motor/Pump	120V 20A 60HZ	
Heater	120V 15A 60HZ	

# FEATURES, UPGRADES & ACCESSORIES

#### Material Type: High-Gloss Acrylic

Install Type: Drop-in with wood frame or Undermount Available Colors: White (W), Almond (A), Oyster (Y), Black (B) Cut-out: 70" x 58" or Undermount Template DD44000

#### Standard (Included) Features:

23 jets, In-line Heater, Chromatherapy lighting, infinity edge overflow, 2 neck massaging waterfalls, 2 pillows, chrome twist and turn drain (for alternate finishes, replace with standard parts, 1.5" drain elbow) **Available Control Systems:** 

J4 Luxury Control Panel (standard)

J5 Luxury LCD Control Panel

## Available Upgrades:

Whisper Quiet Technology, Illumatherapy Lighting

## Available Accessories:


HB76 Optional wood frame (specify finish) 900: Unfinished, 935: Wenge, 936: Teak

# KEY DIMENSIONS

D095 TheraPro Jet Trim Kit (specify metal finish) P556 AccuPro Jet Trim Kit (specify metal finish) 827: Chrome, 826: Brushed Nickel, 845: Oil Rubbed Bronze \*Note: D095 (Chrome) is standard on Illumatherapy jets. GQ88 Light Chromatherapy Add-on Kit DD50 Replacement Pillow (specify color) 959: White, 958: Almond, 969: Oyster

### \*Faucet installation note:

Selecting a faucet for rim mounting: The combined thickness at the rim of the bathtub shell and optional wood deck is 2" (50 mm) nominal. The length of the faucet tailpiece(s) must be long enough to extend past this dimension and have ample clearance to assemble any hardware (i.e. locknut, water supply fittings, etc.) necessary for installation. For undermount units, the combined thickness of the bathtub shell is 1/2" (12 mm) nomial and the undermount deck should not exceed the length of the faucet tailpiece(s), including any assembly hardware.

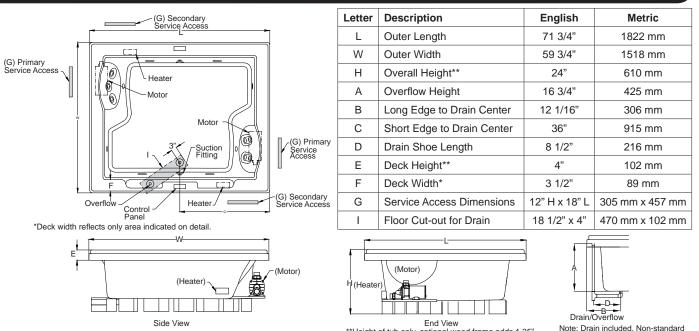

NOTE: Graphics May Not be to Scale

\*\*Height of tub only, optional wood frame adds 1.25

Note: Drain included. Non-standard installation, refer to manual.

© 2010 Jacuzzi Luxury Bath • For additional information call Customer Service 800-288-4002 • www.jacuzzi.com/technicalspecs Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work. PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE. HD440

