

RESIDENTIAL Product

NEWS

Type QT Circuit Breakers

Features and Benefits

- 1/2 inch width-per-pole construction: dual and quad styles.
- Requires 1/2 the space of 1 inch width circuit breakers.
- SWD rated — 15 and 20 amp.
- HACR rated.
- UL listed.
- CSA certified.

Siemens type QT dual circuit breakers are 1 inch wide and consist of (2) 1-pole breakers, in varying combinations of ampere ratings from 15 to 30 amp.

Type QT quad circuit breakers are 2 inches wide and consist of either (1) 2-pole and (2) 1-pole, or (2) 2-pole breakers. 2-pole constructions range from 15-50 amps and are available with internal common trip.



Q1515

Q22020CT2

All type QT circuit breakers are plug-in style and load terminals are provided with the units. They are rated for 120/240V AC and calibrated for 40°C maximum ambient applications. The standard interrupting rating is 10k AIC.

Breaker Type	Dimensions (Inches)		
	Length	Width	Depth
Dual	3-1/8	1	3
Quad	3-1/8	2	3

Selection Information

QT Dual Breaker, (2) 1-Poles 10k AIC Interrupting Rating

Ampere Rating	Complete Breaker Unenclosed	Wire Range	
	Catalog Number	Cu	Al
15-15	Q1515 ^①	#14 - #8	#12 - #8
15-20	Q1520 ^①	#14 - #8	#12 - #8
20-20	Q2020 ^①	#14 - #8	#12 - #8
20-30	Q2030	#14 - #6	#12 - #6

SHIPPING: 12 per carton, 48 per master carton (Wt. 20 lbs.)

QT Quad Breaker, (1) 2-Pole & (2) 1-Poles,^② Common Trip 10k AIC Interrupting Rating

Ampere Rating	Complete Breaker Unenclosed	Wire Range	
	Catalog Number	Cu	Al
15-15	Q21515CT	#14 - #8	#12 - #8
15-20	Q21520CT	#14 - #8	#12 - #8
15-25	Q21525CT	#14 - #8	#12 - #8
15-30	Q21530CT	#14 - #6	#12 - #6
15-40	Q21540CT	#8 - #6	#8 - #4
15-50	Q21550CT	#8 - #6	#8 - #4
20-20	Q22020CT	#14 - #8	#12 - #8
20-30	Q22030CT	#14 - #6	#12 - #6
20-40	Q22040CT	#8 - #6	#8 - #4
20-50	Q22050CT	#8 - #6	#8 - #4

SHIPPING: 6 per carton, 24 per master carton (Wt. 20 lbs.)

① For Non-CTL version, add "NC" to end of catalog number.

② The 1-pole circuit breakers are always 15 or 20 amp.

Example: The Q21540CT is (1) 2-pole, 40 amp and (2) 1-pole, 15 amp.

QT Quad Breaker, (2) 2-Poles, Non-Common Trip 10k AIC Interrupting Rating

Ampere Rating	Complete Breaker Unenclosed	Wire Range	
	Catalog Number	Cu	Al
15-15	Q21515 ^①	#14 - #8	#12 - #8
20-20	Q22020 ^①	#14 - #8	#12 - #8
30-20	Q23020	#14 - #6	#12 - #6
30-30	Q23030	#14 - #6	#12 - #6
30-50	Q23050	#8 - #6	#8 - #4
40-20	Q24020	#8 - #6	#8 - #4
40-30	Q24030	#8 - #6	#8 - #4
40-40	Q24040	#8 - #6	#8 - #4

SHIPPING: 6 per carton, 24 per master carton (Wt. 20 lbs.)



QT Quad Breaker, (2) 2-Poles, Common Trip 10k AIC Interrupting Rating

Ampere Rating	Complete Breaker Unenclosed	Wire Range	
	Catalog Number	Cu	Al
15-15	Q21515CT2	#14 - #8	#12 - #8
20-20	Q22020CT2	#14 - #8	#12 - #8
30-20	Q23020CT2	#14 - #6	#12 - #6
30-30	Q23030CT2	#14 - #6	#12 - #6
30-50	Q23050CT2	#8 - #6	#8 - #4
40-20	Q24020CT2	#8 - #6	#8 - #4
40-30	Q24030CT2	#8 - #6	#8 - #4
40-40	Q24040CT2	#8 - #6	#8 - #4

SHIPPING: 6 per carton, 24 per master carton (Wt. 20 lbs.)

Knockout Diagrams

Quad (Dual would be same profile, but 1" wide) Dimensions (Inches)

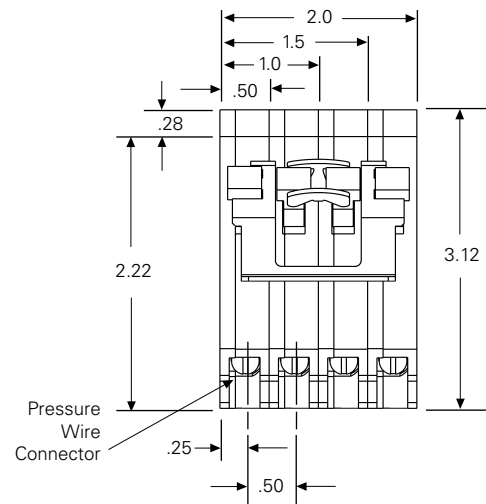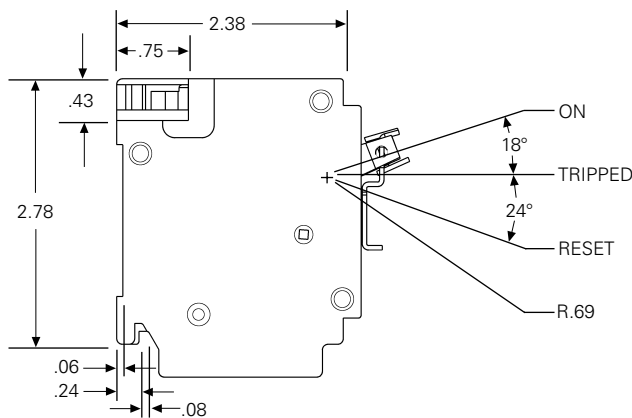

Siemens Energy & Automation, Inc.
Residential Products
5400 Triangle Parkway
Norcross, GA 30092
www.sea.siemens.com