



## Side-by-Side Refrigerators

FFSS2614Q S/P/E

26 Cu. Ft. Standard-Depth



### Product Dimensions

|                                        |         |
|----------------------------------------|---------|
| Height<br>(Including Hinges & Rollers) | 69-5/8" |
| Width (Doors)                          | 36"     |
| Depth (Including Door)                 | 31-3/4" |

### More Easy-To-Use Features

#### Bright Lighting

Our bright lighting makes it easy to see what's inside.

#### Slide-Out Freezer Basket

#### Adjustable Gallon Door Bins

#### Full-Width Freezer Shelf

Gives you more usable space to organize and store more.

#### Ready-Select® Controls

Easily select options with the touch of a button.

#### Available in:



Stainless  
(S)



Pearl  
(P)



Ebony  
(E)

## Signature Features

### Adjustable Interior Storage

Over 100 ways to organize and customize your refrigerator.

### PureSource® Ultra Water Filtration

Clean, pure, refreshing water that removes impurities straight from your refrigerator.

### SpillSafe® Glass Shelves

Slide-out for easy access and are designed to keep spills contained, making them easy to clean.




### Store-More™ Capacity

Our large capacity refrigerator gives you room to store more.

| Features                                   |                                       |
|--------------------------------------------|---------------------------------------|
| Door Design                                | UltraSoft™                            |
| Door Handle Design                         | Color-Coordinated                     |
| Cabinet Finish                             | Black (S),<br>Color-Coordinated (P/E) |
| Door Stops/Door Closers                    | Yes/Yes                               |
| Door Hinge Covers                          | Black (S),<br>Color-Coordinated (P/E) |
| Rollers - Front/Rear                       | Yes/Yes                               |
| Energy Saver Plus Technology               | Yes                                   |
| Water Filter Location                      | Top Right Rear                        |
| Sound Package                              | Quiet Pack                            |
| Dispenser                                  |                                       |
| Controls                                   | Ready-Select®                         |
| Dispenser Design                           | Short, 2-Paddle                       |
| Number of Dispenser Buttons                | 4                                     |
| Crushed Ice/Cube Ice/Chilled Water         | Yes/Yes/No                            |
| Ice Option/Freeze Option                   |                                       |
| Display On/Off Option                      |                                       |
| Lock/Light                                 | No/Yes                                |
| Temp/Door Ajar/Power Failure Alerts        |                                       |
| Water Filter Change Indicator Light        |                                       |
| Air Filter Change Indicator Light          |                                       |
| Refrigerator Features                      |                                       |
| Interior Lighting                          | Bright                                |
| Water Filter Type                          | PureSource 3®                         |
| Air Filter Type                            |                                       |
| Fixed Shelves                              | 2 SpillSafe®                          |
| Sliding Shelves                            | 1 SpillSafe®                          |
| Cool Zone™ Drawer                          |                                       |
| Wine/Can Rack                              |                                       |
| Upper Crisper/Lower Crisper                | 1 Clear/1 Clear                       |
| Humidity Controls                          |                                       |
| Dairy Compartment                          | 1 Clear                               |
| Fixed Door Bins                            | 2 Two-Liter White                     |
| Adjustable Door Bins                       | 2 One-Gallon White                    |
| Non-Slip Bin Liner/Bottle Retainers        |                                       |
| Condiment Bin                              |                                       |
| Freezer Features                           |                                       |
| Door Bins/Tilt-Out Wire Door Bins          | 4 White/No                            |
| Fixed Shelves                              | 1 Flip-Out/2 Wire                     |
| Full Extension Baskets                     |                                       |
| Full Freezer Baskets                       | 1 Plastic                             |
| Half Freezer Baskets                       |                                       |
| Ice Cream Shelf/Pizza Shelf                |                                       |
| SpaceSaver™ Shelf                          |                                       |
| Lighting                                   | Bright                                |
| Specifications                             |                                       |
| Total Capacity (Cu. Ft.)                   | 26.0                                  |
| Refrigerator Capacity (Cu. Ft.)            | 16.5                                  |
| Freezer Capacity (Cu. Ft.)                 | 9.5                                   |
| Power Supply Connection Location           | Right Bottom Rear                     |
| Water Inlet Connection Location            | Left Bottom Rear                      |
| Voltage Rating                             | 120V/60Hz/15A                         |
| Connected Load (kW Rating)<br>@ 120 Volts¹ | 1.02                                  |
| Amps @ 120 Volts                           | 8.5                                   |
| Minimum Circuit Required (Amps)            | 15                                    |
| Shipping Weight (Approx.)                  | 293 Lbs.                              |

¹For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

Standard Refrigerator Depth vs. Counter Depth

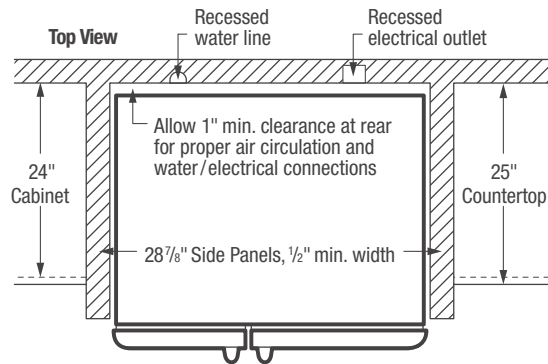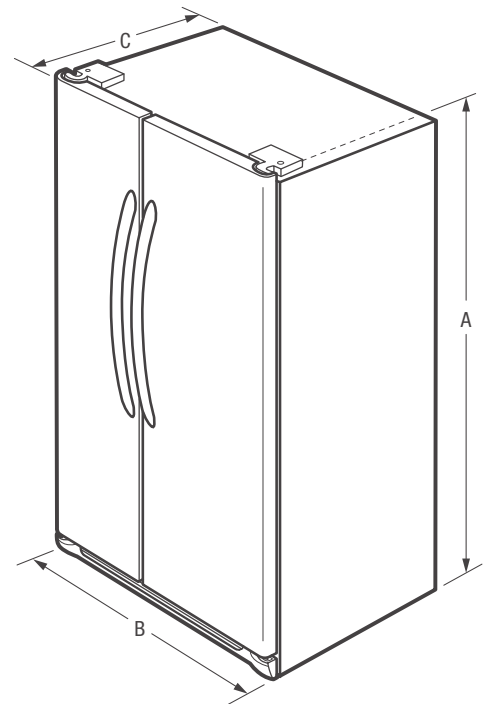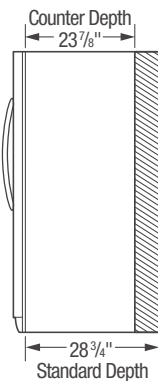

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).



| Product Dimensions                  |               |
|-------------------------------------|---------------|
| A - Height (Incl. Hinges & Rollers) | 69-5/8"       |
| B - Cabinet Width/Door Width        | 35-5/8" / 36" |
| C - Depth (Incl. Door)              | 31-3/4"       |
| Depth with Door Open 90°            | 49-1/2"       |

Accessories information available on the web at [frigidaire.com](http://frigidaire.com)


## FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • [frigidaire.com](http://frigidaire.com)  
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • [frigidaire.ca](http://frigidaire.ca)

FFSS2614Q 02/14



© 2014 Electrolux Home Products, Inc.

Specifications subject to change.

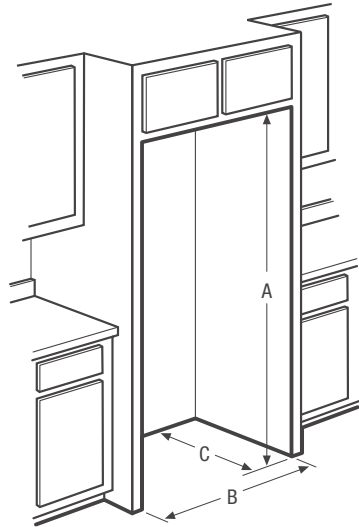

**"Built-In Look" Cutout Dimensions**

(A) 70 1/4" (B) 36" (C) 28 7/8"

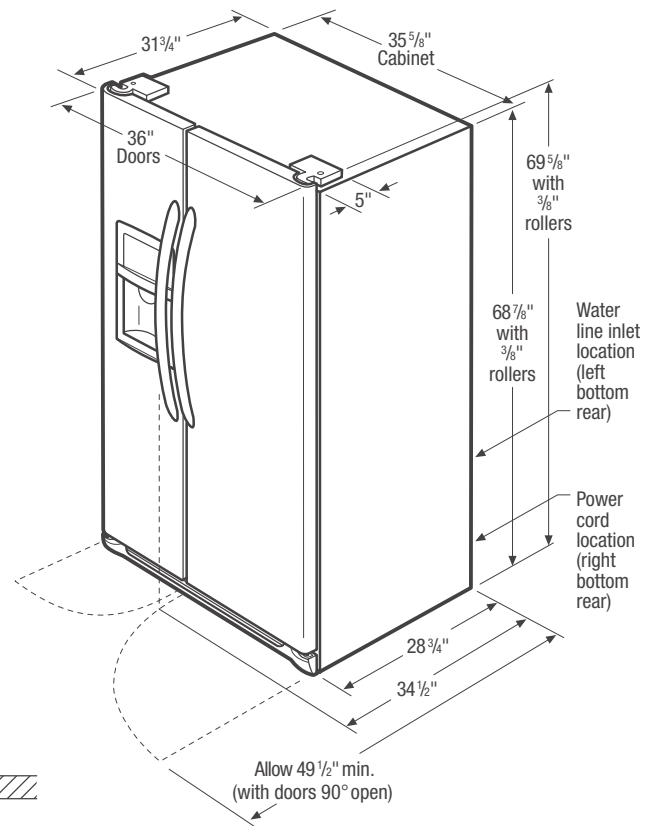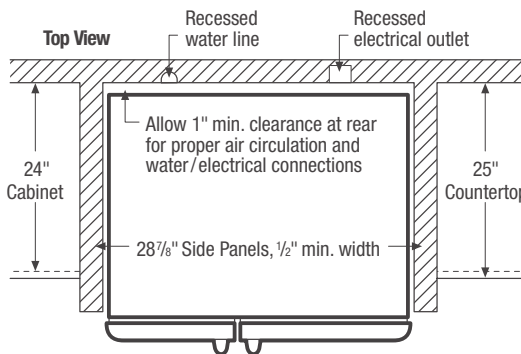

## Side-by-Side Refrigerator Specifications

- Product Shipping Weight (approx.) – 293 Lbs.
- Voltage Rating – 120V/60 Hz/15 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.02 kW  
(For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (*Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with restricted removal.*)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.
- For proper ventilation, front grille MUST remain unobstructed.

- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure – Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.


## "Built-In Look" Specifications

- Minimum opening of 70-1/4" H x 36" W x 28-7/8" D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.

**Note:** For planning purposes only. Refer to Product Installation Guide on the web at [frigidaire.com](http://frigidaire.com) for detailed instructions.

Use these dimensions and clearance instructions for planning purposes only. For detailed installation instructions, refer to installation guide, packed with product, or on the web at [frigidaire.com](http://frigidaire.com).


Front

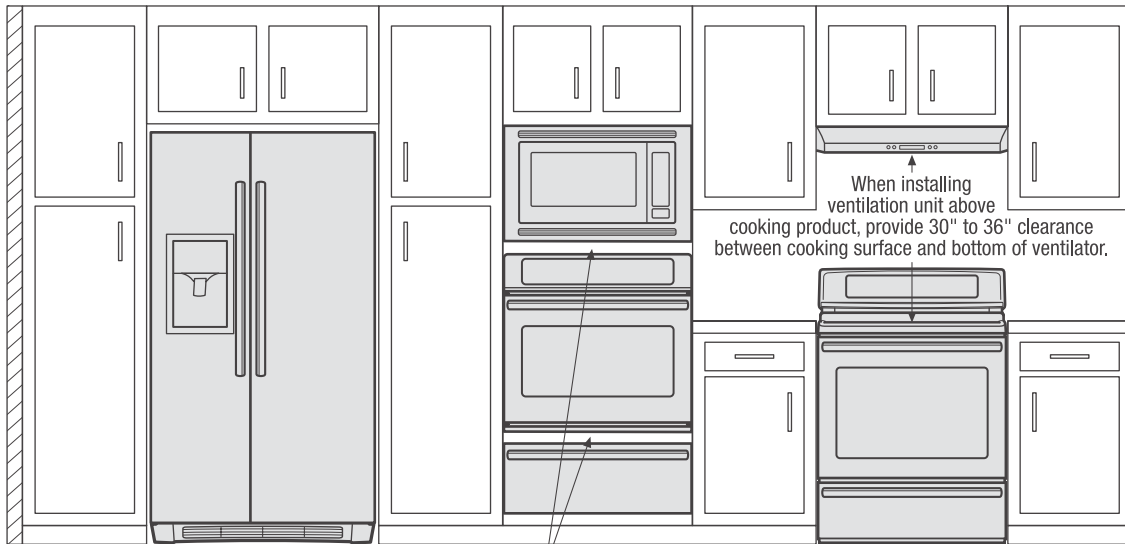

When installing built-in cooking appliances in combination, 2"-high minimum visible gap between appliance faceplates required.

Clearance information for cooking appliances, provided in specific product's installation guide.


Top

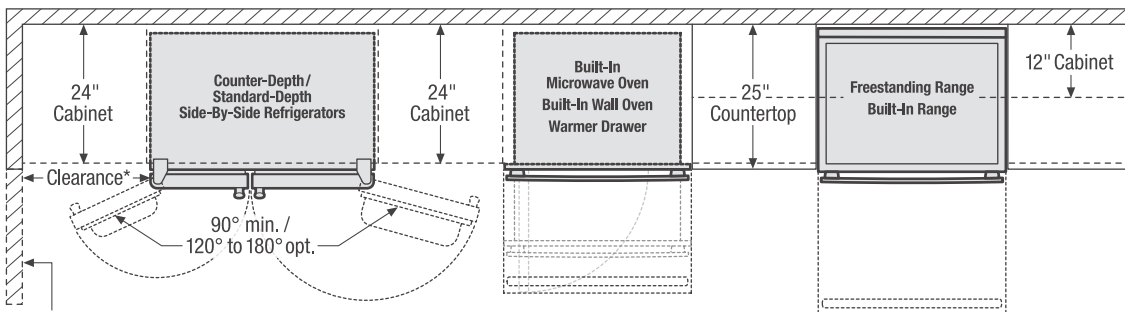

\*When installing side-by-side refrigerator adjacent to wall, cabinet or another appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide limited drawer/crisper access with restricted removal.)


When installing appliance with sliding drawer, swinging or drop-down door directly across from obstructions, provide sufficient clearance for drawer extension or door swings.

Top

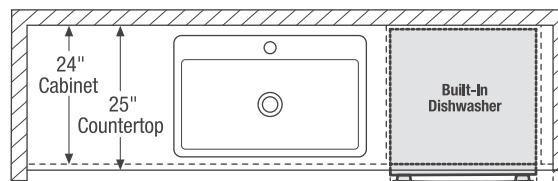

When installing appliance with sliding drawer or drop-down door adjacent to wall, cabinet, or other obstruction that extends beyond front edge of appliance, allow 2" minimum clearance between drawer or door and obstruction.

Front

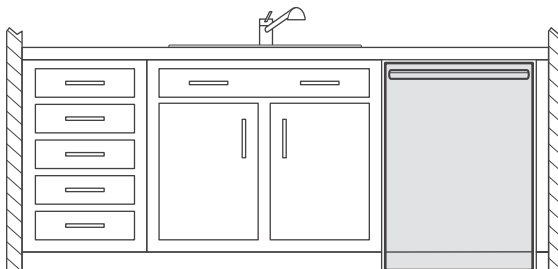

When installing appliance with sliding drawer or drop-down door directly across from obstructions, provide sufficient clearance for drawer extension or door swing.