

DOUBLE WALL OVEN

Featuring Wave-Touch® Electronic Controls



SIGNATURE FEATURES



FAST PREHEAT

The Fast Preheat feature expedites warming the oven to the desired temperature 25% faster than traditional preheat.



LUXURY-GLIDE® OVEN RACK

With a ball bearing system, the porcelaincoated self-clean oven rack is so smooth it extends effortlessly.



WAVE-TOUCH® CONTROLS

One simple touch and the control panel activates, showing your cooking options. After you make your choices, all but the options selected will fade away, returning to an elegant display.



7 COOKING MODES

Bake, Broil, Convection Bake, Convection Roast, Convection Broil, Keep Warm and Slow Cook.

EW27EW65PS

PRODUCT DIMENSIONS

Height (Including 1" Bottom Trim) 50-7/16" Width 27" 24-3/4" Depth

MORE EASY-TO-USE FEATURES

FRESH CLEAN™ TECHNOLOGY

Exclusive Fresh Clean™ self-cleaning technology virtually eliminates odors and smoke to keep the room smelling fresh.

3 "MY FAVORITE" SETTINGS

Settings you can customize to meet your needs, so the option you want is available at the touch of a button.

LUXURY-DESIGN® LIGHTING

Our ramp-up designer halogen lighting provides full visibility to see in the back of the oven.

CONVECTION CONVERSION

Automatically adjusts standard baking temperatures to convection temperatures, for perfect, consistent results.

MULTIPLE SELF-CLEAN OPTIONS WITH AUTOMATIC DOOR LOCK

HIDDEN BAKE ELEMENT

The lower bake element is hidden beneath a smooth surface, allowing convenient, easy cleanup.

SIGNATURE COBALT BLUE INTERIOR

FULL OVEN GLASS INNER DOOR

Flat oven door design for easy cleanup.

SABBATH MODE (STAR-K® CERTIFIED)

PLATINUM STAR® LIMITED WARRANTY

Our exclusive limited warranty that includes a 3-year coverage on parts and one year on labor without charge.1


Available in:



Eligibility based on product registration with Electrolux North America within 60 days of purchase. Products must have been purchased on or after July 1, 2013. Coverage includes material parts for 3 years and labor for 1 year.




Configuration	Double
CONTROL PANEL FEATURES	
Wave-Touch® Electronic Oven Controls	Yes
Keypad Entry of Time & Temperature	Yes
Electronic Clock & Timer	Yes
Temperature Display	Yes
Toggle Control	Yes
Automatic Oven (Delay, Cook & Off)	Yes
Lockout	Yes
Automatic Oven Shutoff – 12 Hour	Yes
Programmable for °F or °C	Yes
Luxury-Design® Halogen Oven Lights/Touch Pad On/Off	Yes
OVEN FEATURES	
Oven Cavity (both ovens)	3.9 Cu. Ft.
Hidden Bake Element	Yes
Electric Bake Element – 1450 Watts	Yes
Six-Pass Broil Element – 3400 Watts	Yes
Convection Element – 2500 Watts	Yes
Cobalt Blue Interior	Yes
Self-Clean Options with Door Lock	3
Fresh Clean™	Yes
Perfect Convect ^{3®} with Variable 2-Speed Fans	Yes
Cooking Modes – Bake, Broil, Convection Bake, Convection Roast, Convection Broil, Keep Warm, Slow Cook	7
Baking Options – Perfect Turkey®, Defrost, Dehydrate, Bread Proof, My Favorite, Multi-Stage Cooking, Temperature Probe, Fast Preheat, Delay Bake, Convection Convert	10
Luxury-Design® Lighting with Dual 40W and Dual 25W Halogen Bulbs	Yes
Luxury-Glide® Racks	1
Conventional Racks	2
Convection Roasting Rack	Yes
ADDITIONAL FEATURES	
Signature Soft-Arc Handle Design	Yes
Luxury-Hold™ Oven Doors	Yes
Extra-Large Glass Windows	Yes
Sabbath Mode (Star-K® Certified)	Yes
,	
ACCESSORIES	
Porcelain Broiler Pan and Insert	Included
3"-High Bottom Trim: S – PN# 903114-9020	Optional
10'-Long Armored Power Cable – PN# 903056-9010	Optional
SPECIFICATIONS	
Color –	
Stainless Steel	S
Power Supply Connection Location	Left Bottom Rear
Connected Load (kW Rating) @ 240/208 Volts	8.0/6.0
Amps @ 240/208 Volts	33.3/28.8
Minimum Circuit Required (Amps)	40
3-1/2'-Long Armored Electrical Cable	Included
Shipping Weight (Approx.)	260 Lbs.

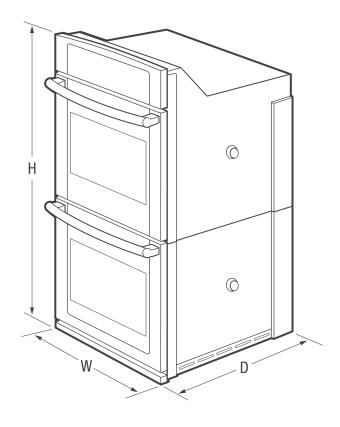

Height (Including 1" Bottom Trim)	50-7/16"	
Width	27"	
Depth (to Front Door Corner) (with 90° Door Open)	24-3/4" 45-3/4"	
OVEN CAVITY DIMENSIONS		
	17"	
OVEN CAVITY DIMENSIONS Height Width	17" 20-1/2"	





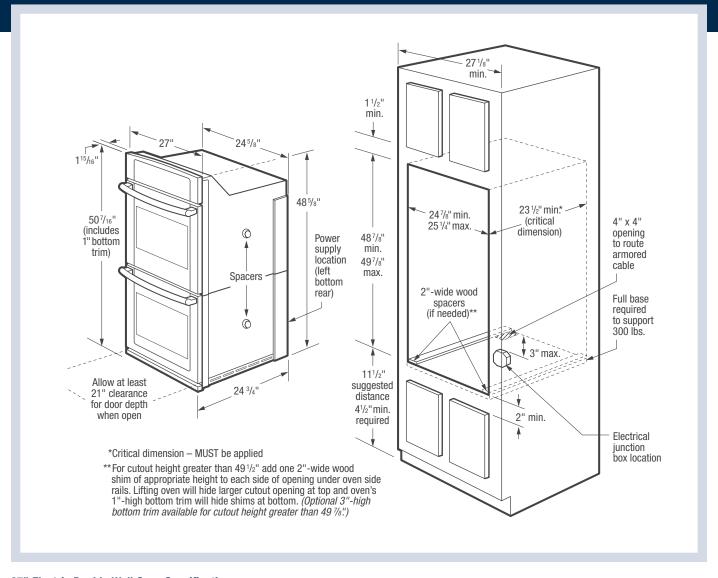

27" Electric Double Wall Oven Specifications

- Product Weight 240 Lbs.
- Single phase 3- or 4-wire cable, 120 /240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.
- Connected Load (kW Rating) @ 240/208 Volts = 8.0/6.0 kW
- Amps @ 240/208 Volts = 33.3/28.8 Amps
- Recommended Circuit Breaker 40 Amps
- Always consult local and national electric codes.
- Minimum 21" clearance for oven door depth when open.
- Suggested distance from floor is 11-1/2". Minimum required distance is 4-1/2".
- Minimum 23-1/2" deep cutout dimension is critical for proper installation, to ensure that oven's faceplate will fit flush against cabinet front.
- For cutout height greater than 49-1/2" add one 2"-wide wood shim of appropriate height to each side of opening under oven side rails. Lifting oven will hide larger cutout opening at top and oven's 1"-high bottom trim will hide shims at bottom. (Standard 1"-High Bottom Trim included. Optional 3"-High Bottom Trim available for cutout height greater than 49-7/8".)

- Full oven base of solid plywood or similar material required, capable of supporting 300 Lbs.
- · Base must be level and cabinet front must be square.
- Double Wall Ovens are NOT approved to be used in stackable or side-by-side installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.com for detailed instructions.

Optional Accessories

- 3"-High Bottom Trim: S (PN# 903114-9020).
- 10'-Long Armored Power Cable (PN# 903056-9010).

