

Specifications

FAUCET DESCRIPTION

- Chrome plated metal construction
- 1/2" connections: IPS exterior, CC exterior
- Includes head, arm, flange and diverter tub spout

OPERATION

- · Dual control
- Lever handles
- Handles rotate toward spout to open

FLOW

• Showerhead is limited to 2.5 gpm (9.5 L/min) max.

CARTRIDGE

- 1224 cartridge design
- Nonmetallic and stainless steel materials

STANDARDS

 Third party certified to ASME A112.18.1/CSA B125, ANSI A117.1 and all applicable requirements referenced therein


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



MOEN[®] Two-Handle Tub/Shower Valve

Model: 82402

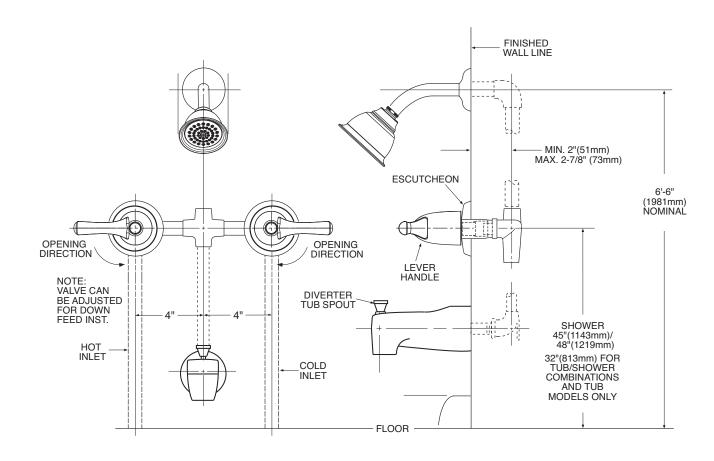

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com