



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- Hydrolock™ quick connect installation
- Flush button with raised stream and spray indicators
- Metal construction with 10 finishes
- Pullout spray with 59" metal hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

## OPERATION

- Lever style handle
- Temperature controlled by 180° arc of handle travel
- Spout receptor rotation is 145°
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

## FLOW

- Flow is limited to 2.2 gpm (8.3 L/min) at 60 psi

## CARTRIDGE

- 1225 cartridge design
- Engineered polymers, non-ferrous and stainless steel materials


## STANDARDS

- Designed and manufactured to comply with the requirements of: CSA B-125, ASME A112.18.1M, IAPMO PS 49-92, NSF 61 Section 9, California Proposition 65, ANSI A117.1, ADA
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

ADA

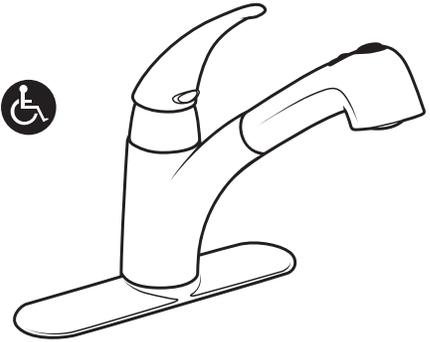


**extensa™**  
**Single Control Kitchen Faucet**  
**w/Pullout Spray**

**Models:** 7560, 7560C, 7560CS, 7560S, 7560W, 7560V, 7560CBL, 7560BL, 7560SL, 7560SLBL

87560, 87560C, 87560S, 87560W, 87560CS, 87560CBL, 87560SL, 87560SLBL

**NOTE:** DESIGNED TO INSTALL THRU 1 OR 3 HOLES 1-1/4" (32mm) MIN. DIA.

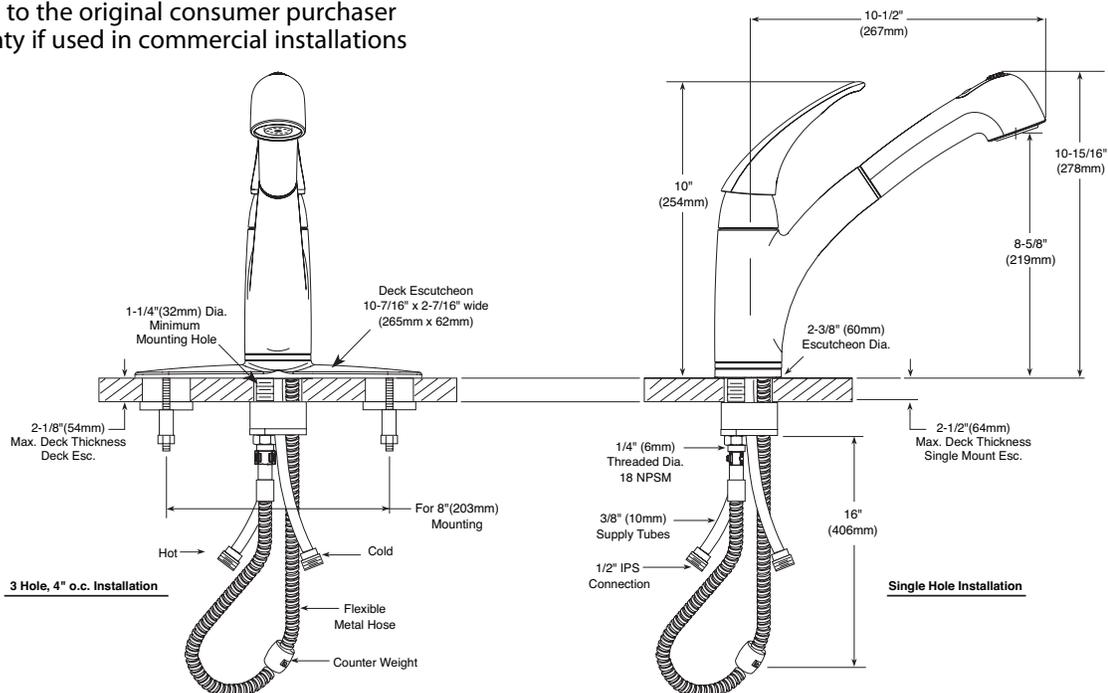

## CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com