

**CADET™ 5' x 32" with INTEGRAL APRON
WHIRLPOOL AND BATHING POOL**

- ☐ **2776.218W Whirlpool featuring System I,
Left Hand Outlet**
- ☐ **2776.118W Whirlpool featuring System I,
Right Hand Outlet**

Product Features:

- Acrylic with fiberglass reinforcement
- Integral apron with removable access panel
- Integral 3-sided tile/water retention flange
- Form-fitted back rest
- Dual, molded in arm rests
- 1.25 HP single speed, self-draining pump/motor
- Factory installed power cord with plug
- Eight multi-directional and flow-adjustable jets including:
 - Two foot jets
 - Four body massage jets
 - Two recessed back-rest jets
- Deck-mounted air switch On/Off
- Two silent air volume controls
- Factory installed and tested whirlpool system

EverClean™ Whirlpool Massage featuring System I

- ☐ **2776.218WC Whirlpool featuring System I,
Left Hand Outlet**
- ☐ **2776.118WC Whirlpool featuring System I,
Right Hand Outlet**
 - Same as above except with the EverClean™ whirlpool system featuring Antimicrobial AlphaSan®

Nominal Dimensions:

(59-7/8" x 32" x 20")
1521 x 813 x 508mm

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

SEE REVERSE FOR ROUGHING-IN DIMENSIONS
AND PRODUCT SPECIFICATIONS



To Be Specified - Required:

- ☐ Color:
- ☐ Bath Filler: (specify finish)
- ☐ Bath Drain: 1583.470 (specify finish)





To Be Specified - Optional:

- ☐ Bath Caddy: 9533.100 (in Chrome only)
- ☐ Jet Trim Ring Kit: 9860.200-two per kit (Specify finish)
for Body Massage Jets only

For color/finish availability and other faucet choices, please
see the Product Selector and Pricing Guide.

CADET™ 5' x 32" w/INTEGRAL APRON WHIRLPOOL & BATHING POOL

HIGH GLOSS ACRYLIC

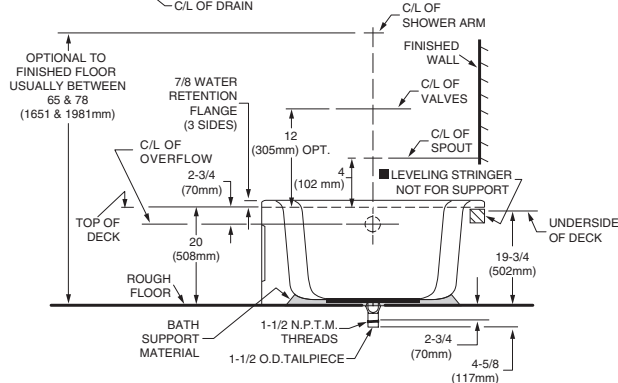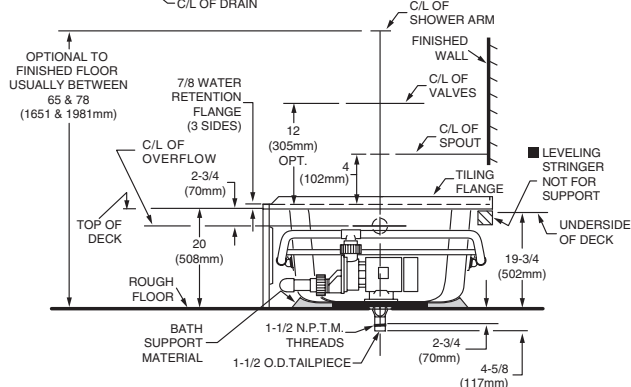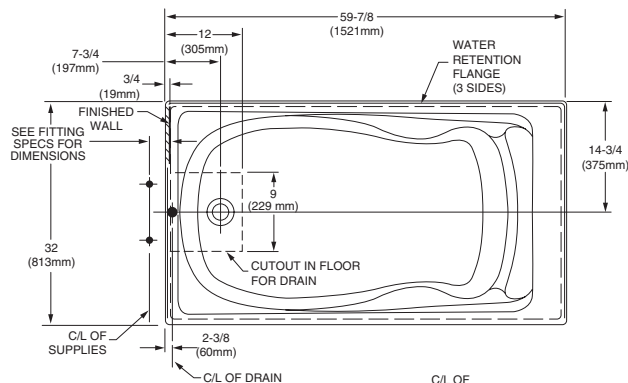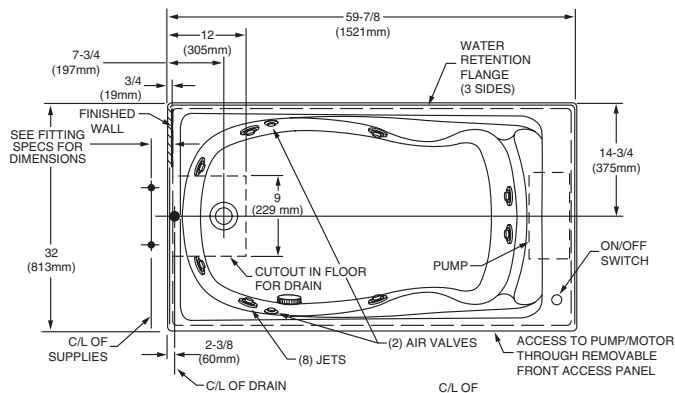

GENERAL SPECIFICATIONS FOR 2776 WHIRLPOOL

INSTALLED SIZE	59-7/8 x 32 x 20 (1521 x 813 x 508mm)
WEIGHT	115 Lbs. (52 Kg.)
WEIGHT w/WATER	574 Lbs. (258 Kg.)
GAL. TO OVERFLOW	55 Gal. (208 L.)
WHIRLPOOL MIN. OPERATING VOL.	45 Gal. (171 L.)
BATHING WELL AT SUMP	20 x 40 (508 x 1016mm)
BATHING WELL AT RIM	26 x 53-1/2 (660 x 1359mm)
WATER DEPTH TO OVERFLOW	14-1/2 (368mm)
FLOOR LOADING	43 Lbs./Sq.Ft. (208 Kgs./Sq.m)
(PROJECTED AREA)	
PTS.	20.8
CUBE (FT ³)	35.3

WHIRLPOOL ELECTRICAL SPECIFICATIONS

SYSTEM I PUMP	1.1 HP, 9.9 AMPS, 120V.
---------------	-------------------------

GENERAL SPECIFICATIONS FOR 2776 BATHING POOL

INSTALLED SIZE	59-7/8 x 32 x 20 (1521 x 813 x 508mm)
WEIGHT	75 Lbs. (34 Kg.)
WEIGHT w/WATER	525 Lbs. (236 Kg.)
GAL. TO OVERFLOW	54 Gal. (205 L.)
BATHING WELL AT SUMP	20 x 40 (508 x 1016mm)
BATHING WELL AT RIM	26 x 53-1/2 (660 x 1359mm)
WATER DEPTH TO OVERFLOW	14-1/2 (368mm)
FLOOR LOADING	39 Lbs./Sq.Ft. (191 Kgs./Sq.m)
(PROJECTED AREA)	
PTS.	20.8
CUBE (FT ³)	35.3

NOTES:

BATH TO BE INSTALLED ABOVE FLOOR LINE AS A RECESS INSTALLATION. SUPPORT OF BATH BY SUMP BEDDING. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

LEFT HAND OUTLET SHOWN, RIGHT HAND REVERSE DIMENSIONS (2776.118).

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standards Z124.1 and A112.19.7. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.