

BATH WHIRLPOOL K-1221


Features

- Acrylic
- Drop-in
- 6 individually adjustable ProFlex® hydro-massage jets
- Pump with air switch and grounding-type plug-in cord
- Molded lumbar supports and armrests
- Optional K-9696 whirlpool trim kit in various finishes
- Optional K-1223 non-removable apron
- 72" (1829 mm) x 48" (1219 mm) x 23" (584 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- ANSI Z124.1.2
- UL 1795
- ASTM E162
- ASTM E662

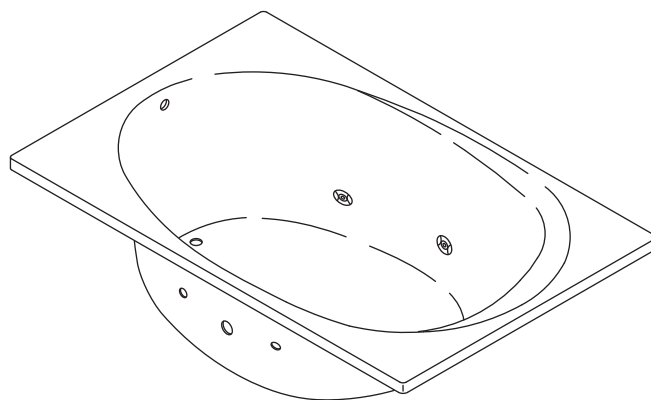

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes	
K-1221	Bath whirlpool	☐ 0	☐ Other_____

Recommended Accessories

K-7161-AF	Adjustable pop-up drain	☐ CP	☐ PB	☐ Other_____
K-7213	Clearflo bath cable drain with PVC tubing	☐ CP		☐ Other_____
K-7214	Clearflo bath cable drain without PVC tubing	☐ CP		☐ Other_____

Optional Accessories

K-1223	Non-removable apron	☐ 0	☐ Other_____
K-9696	Jet trim kit (metal finishes)	☐ CP	☐ Other_____

Product Specification

The drop-in acrylic bath whirlpool shall be 72" (1829 mm) in length, 48" (1219 mm) in width, and 23" (584 mm) in height. Product shall have 6 individually adjustable ProFlex hydro-massage jets and a pump with air switch and grounding-type plug-in cord. Product shall have molded lumbar supports and armrests. Product shall have an optional K-1223 non-removable apron, and an optional K-9696 whirlpool trim kit in various finishes. Bath whirlpool shall be Kohler Model K-1221-_____.

SEADREAM®

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	47" (1194 mm) x 37" (940 mm)
Basin area, top	67" (1702 mm) x 42" (1067 mm)
Weight	120 lbs (54.4 kg)
To overflow:	
Water depth	16-7/8" (429 mm)
Capacity	122 gal (461.8 L)
* Approximate measurements for comparison only.	

Drop-in cut-out	70-1/4" (1784 mm) x 46-1/4" (1175 mm)		
-----------------	---------------------------------------	--	--

Pump:	V	Hz	A
1-speed	120	60	7.5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz

Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.


Installation Notes

Install this product according to the installation guide.

Floor support under this product must provide for a minimum of 49 lbs/square foot (237 kg/square meter) loading.



The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

The apron must be installed before the finished floor and wall materials are installed.

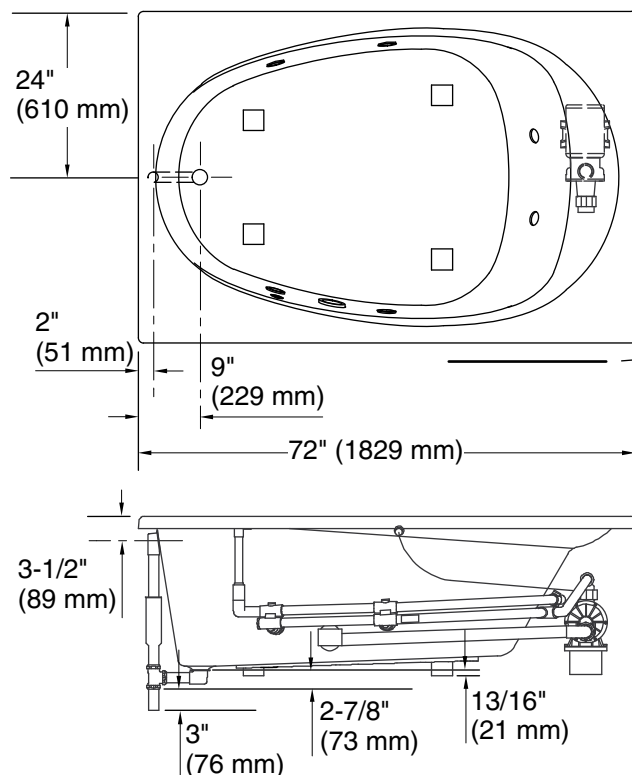

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

Pump/Control Access
(If Apron Is Not Used)
20" (508 mm) W x
15" (381 mm) H

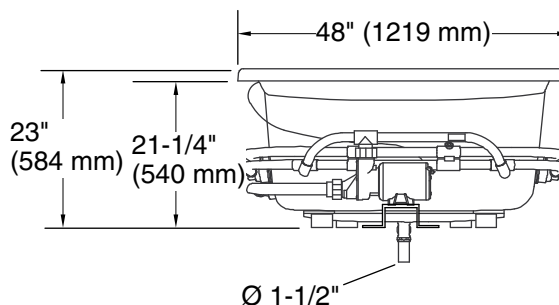

Product Diagram