


Features

- Cast iron with Safeguard® finish
- Left drain
- For corner installation
- Integral seat
- 48" (1219 mm) x 44" (1118 mm) x 14" (356 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1/CSA B45.2

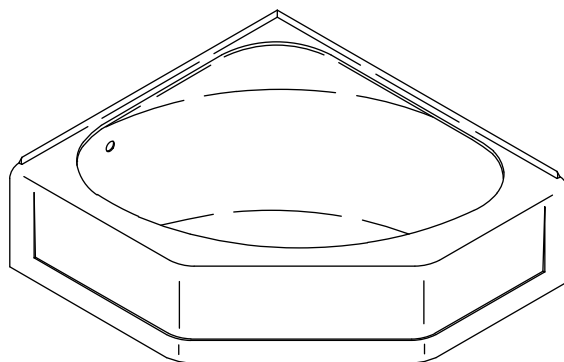

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-821	Bath – left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories

K-7213	Clearflo bath cable drain with PVC tubing	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-7214	Clearflo bath cable drain without PVC tubing	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-7166-AF	Clearflo pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____

Optional Accessories

K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-9702	Corner curtain rod	<input type="checkbox"/> CP	

Product Specification

The bath shall be made of cast iron with Safeguard finish. Product shall be 48" (1219 mm) in length, 44" (1118 mm) in width, and 14" (356 mm) in height. Product shall have an integral seat. Product shall be available with left drain. Product shall be for corner installation. Bath shall be Kohler Model K-821 -_____.

MAYFLOWER®


Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	43" (1092 mm) x 25" (635 mm)
Basin area, top	48" (1219 mm) x 30" (762 mm)
Weight	332 lbs (150.6 kg)
To overflow:	
Water depth	8-5/8" (219 mm)
Capacity	33 gal (124.9 L)
* Approximate measurements for comparison only.	

Installation Notes

Refer to install installation instructions included with fixture before beginning installation.

Floor support under the bath must provide for a minimum of 43 lbs/square foot (211 kg/square meter) loading.

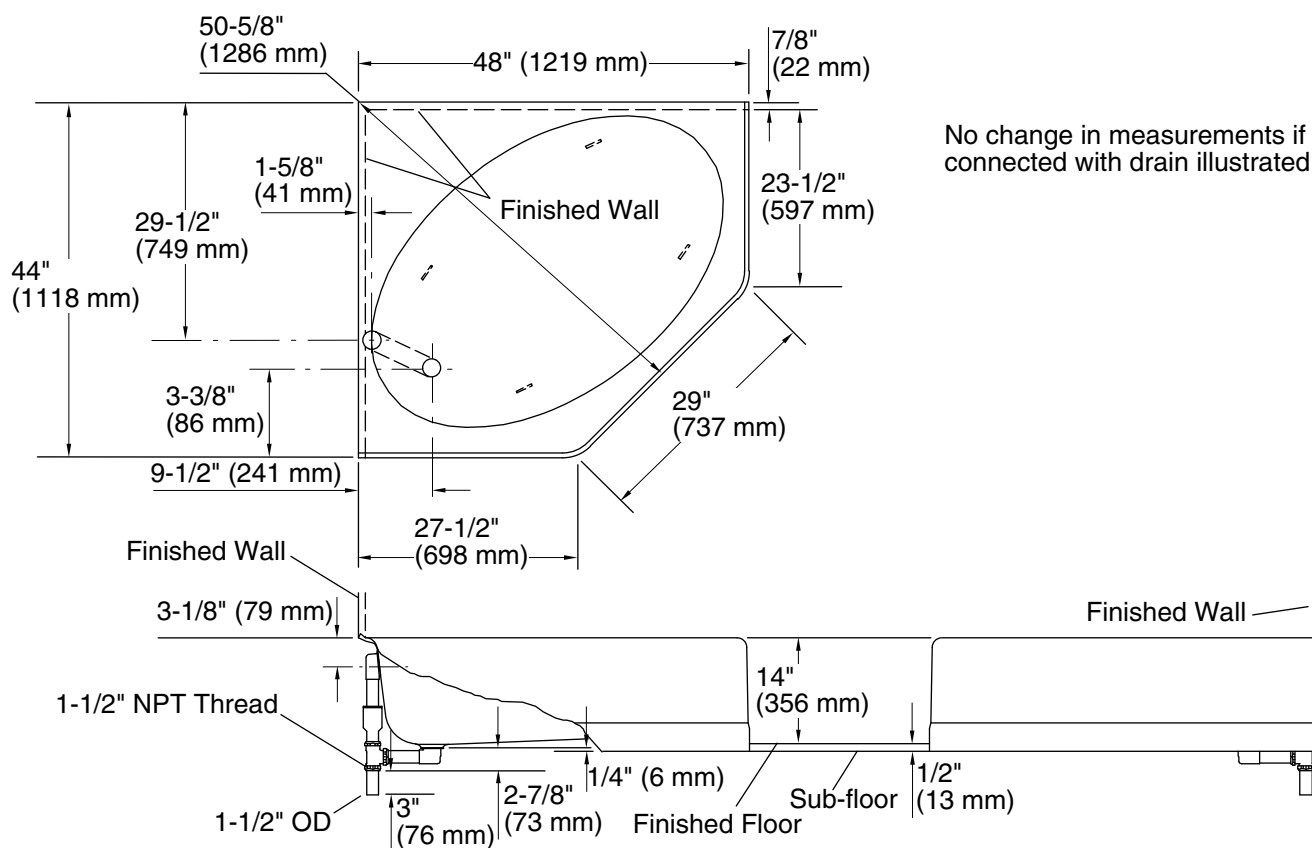

Product Diagram