

SEASIDE_{TM}

Features


- Acrylic
- Oval shape
- 72" (1829 mm) x 42" (1067 mm) x 21" (533 mm)

6' BATH K-1249

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662



Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors	Colors/Finishes	
K-1249	6' (1829 mm) bath	0	□ Other	
Recommended Accessories				
K-7161-AF	Pop-up drain OR	□ CP	☐ Other	
K-7213	Cable drain with PVC tubing OR	□ CP	☐ Other	
K-7214	Cable drain without PVC tubing	□ CP	☐ Other	

Product Specification

The acrylic bath shall be 72" (1829 mm) in length, 42" (1067 mm) in width, and 21" (533 mm) in height. Bath shall be oval shape. Bath shall be Kohler Model K-1249-____.

SEASIDE_{TM}

Technical Information

Fixture*:				
Basin area:				
Bathing well, bottom	50" (1270 mm) x 31" (787 mm)			
Bathing well, top	61" (1549 mm) x 34" (864 mm)			
Weight	85 lbs (36.8 kg)			
To overflow:				
Water depth	14-1/2" (368 mm)			
Capacity	86 gal (325.5 L)			
* Approximate measurements for comparison only.				

Included components:	
Cut-out template	113927-7


Installation Notes

Install this product according to the installation guide.

Refer to installation instructions included with fixture before beginning installation.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

Unless otherwise specified, floor support under bath must provide for a minimum of 40 lbs/square foot (195 kg/square meter) loading.

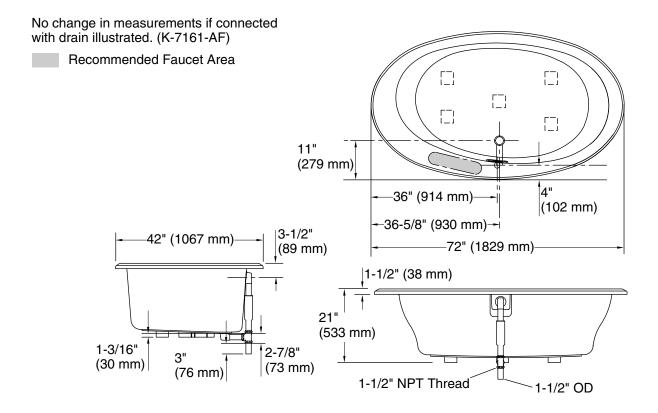

Product Diagram

