

Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit setting for added safety
- 9" (22.9 cm) swing spout reach
- Flexible connections for easy installation
- Available with or without matching finish sidespray
- 2.2 gpm (8.3 lpm) maximum flow rate

Codes/Standards Applicable


Specified model meets or exceeds the following at date of manufacture:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.18.1/CSA B125.1
- NSF 61
- Energy Policy Act of 1992
- All applicable US Federal and State material regulations

KITCHEN SINK FAUCET K-12171

ALSO K-12172, K-12175, K-12176

ADA	CSA B651	OBC
-----	----------	-----

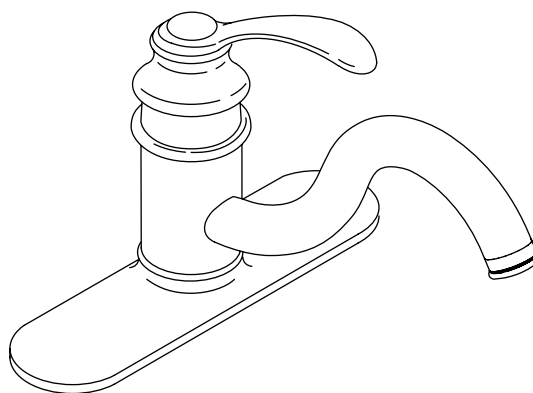

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Accessories

- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-12171	Kitchen sink faucet – with escutcheon, less sidespray (shown)	☐ CP	☐ Other ____
K-12172	Kitchen sink faucet – with escutcheon, with handspray	☐ CP	☐ Other ____
K-12175	Kitchen sink faucet – less escutcheon, less sidespray	☐ CP	☐ Other ____
K-12176	Kitchen sink faucet – less escutcheon, with sidespray	☐ CP	☐ Other ____

Optional Accessories		
K-12001	Plug button	☐ Other ____
1030920	Sidespray deep roughing-in kit	☐ NA

Product Specification


The single-control kitchen sink faucet shall be of metal construction. Product shall have a maximum flow rate of 2.2 gallons (8.3 L) per minute with lower flow aerator options available (refer to the Kohler Price Book). Product shall feature a one-piece, self-contained ceramic disc valve, which allows both volume and temperature control. Product shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Product shall feature a high-temperature limit setting, allowing the faucet to be turned on and off at any temperature setting. Product shall feature a 9" (22.9 cm) swing spout reach, and flexible connections for easy installation. Product shall be available with or without a matching finish sidespray. Faucet shall be Kohler Model K-____-____.

FAIRFAX®

Installation Notes

Install this faucet following the installation instructions provided.

ADA, CSA B651, OBC compliant when installed to the specific requirements of these regulations.

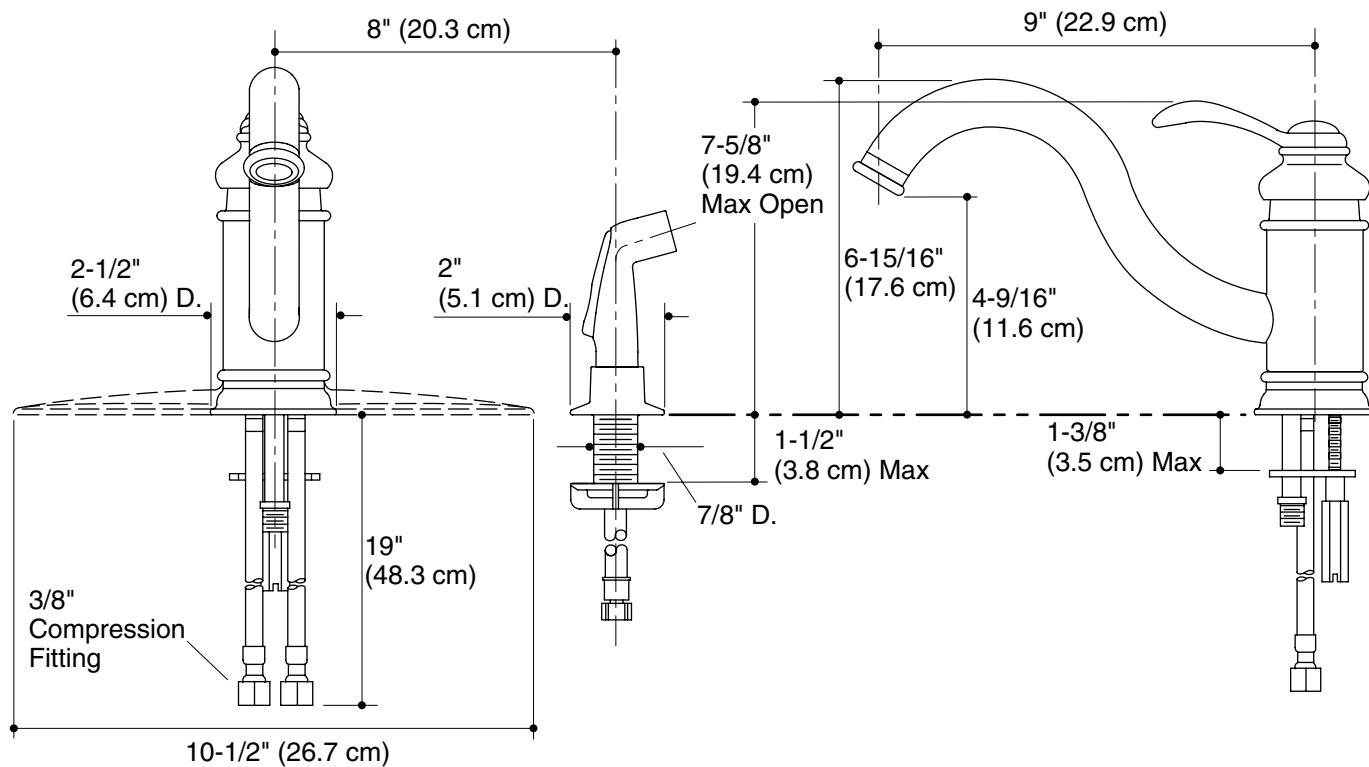

Product Diagram