


Features	
Controls	Ready-Select™
Surface Type	Ceramic Glass
Right Front Element (Watts)	9" - 2,500
Right Rear Element (Watts)	6" - 1,250
Left Front Element (Watts)	6" - 1,250
Left Rear Element (Watts)	9" - 2,500
Hot-Surface Indicator Light	Yes
Control Location	Front Left
Knob Color	Color-Coordinated
Knob Type	Plastic
Certifications	
A.D.A. Compliant¹	Yes
Specifications	
Power Supply Connection Location	Left Side
Voltage Rating	240V /208V / 60Hz
Connected Load (kW Rating) @ 240 / 208 Volts²	6.5 / 4.9
Amps @ 240 / 208 Volts	21.7 / 18.8
Minimum Circuit Required (Amps)	30
Approved for Electric Single Wall Oven Combination Installation	No
Shipping Weight (Approx.)	45 Lbs.

¹When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

²Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

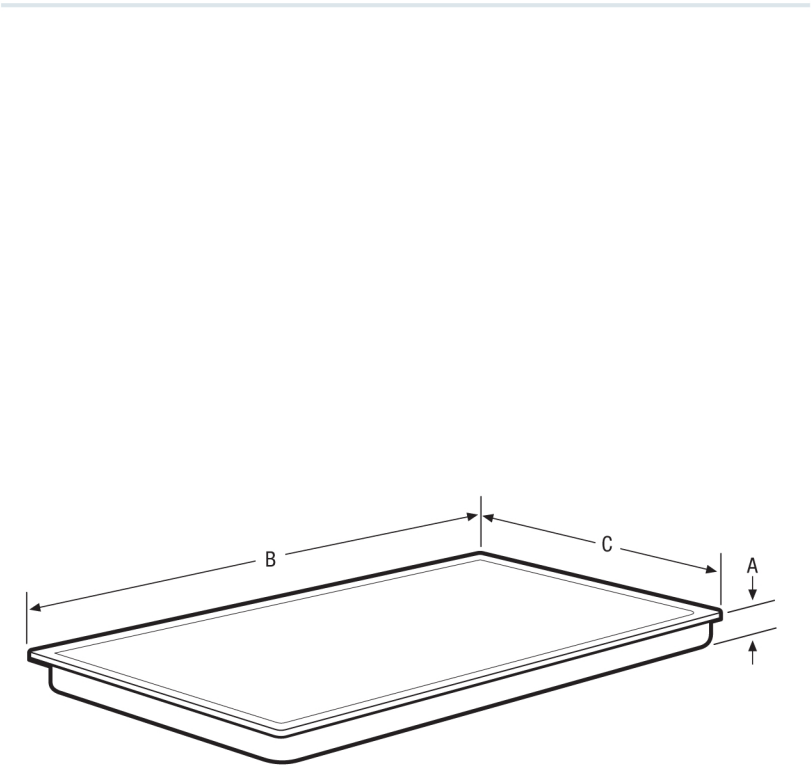

NOTE: Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions		Cutout Dimensions	
A - Height	3-3/4"	Height	5-3/4"
B - Width	32-1/4"	Width (Min.)	31"
C - Depth	20-1/4"	Width (Max.)	31-1/4"
		Depth (Min.)	19"
		Depth (Max.)	19-1/4"

Granite Countertop
Installation Kit available.