


FFGC3025L S/W/B **30" Gas**



Features		
Controls	Ready-Select™	
Surface Type	Deep-Drawn Stainless Steel (S), Deep-Drawn Porcelain (W/B)	
Grates	Black Matte	
Right Front Element (BTU)	15,000	
Right Rear Element (BTU)	5,000	
Left Front Element (BTU)	9,500	
Left Rear Element (BTU)	9,500	
Control Location	Right Side	
Knob Color	Black (S), Color Coordinated (W/B)	
Knob Type	Plastic	
Bowl Type		
Specifications		
Power Supply Connection Location	Right Rear	
Gas Supply Connection Location	Right Rear	
LP Gas Conversion Kit	Included	
Voltage Rating	120V/60V/15A	
Connected Load (kW Rating) @ 120 Volts¹	.001	
Amps @ 120 Volts	1.0	
Minimum Circuit Required (Amps)	15	
Approved for Electric Single Wall Oven Combination Installation	No	
Shipping Weight (Approx.)	45 Lbs.	

For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

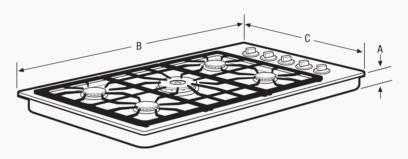

NOTE: Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions	
A-Height	4-1/4"
B-Width	30"
C-Depth	21-1/2"

Cutout Dimensions	
Height	8"
Width (Min.)	27-1/4"
Width (Max.)	28-1/2"
Depth (Min.)	19-1/8"
Depth (Max.)	19-3/4"

Granite Countertop Installation Kit available.