PT970BM/CM/WM

GE Profile™ 30" Built-In Double Microwave/Convection Oven

Dimensions and Installation Information (in inches)

| KW Rating | | |
|--------------|---------|--|
| 240V | 6.4 | |
| 208V | 4.8 | |
| Breaker Size | | |
| 240V | 30 Amps | |
| 208V | 30 Amps | |

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating. Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.


Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

| Suitable bracing — to support runners | Q 21-5/8" ✓ over centerline → of cabinet | _ 2 x 4 or equivalent runners |
|--|--|-------------------------------------|
| | | |

| Cabinet | 30" |
|--|---------|
| A – Overlap of oven over side of edges of cutout | 11/16" |
| B – Overlap of oven at top and bottom of cutout | 1" |
| C – Overall of oven at top of cutout | 1/2" |
| Oven | |
| D – Overall depth* | 23-1/2" |
| E – Overall height with trim | 44" |
| Overall height without trim | 43-1/2" |
| E -Overall width | 29-3/4" |

*Depth including door handle is approximately 26-6/10" min. to 26-9/10" max.

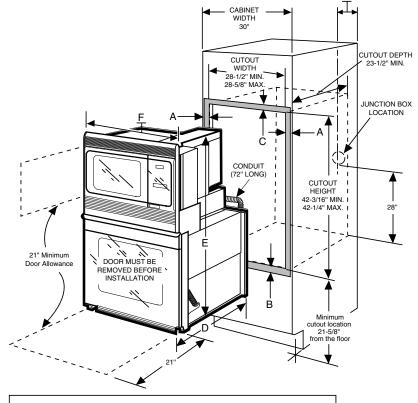

MOST 30" WALL CABINETS CAN BE USED WITH THIS UNIT. THE OPENING BETWEEN THE INSIDE WALLS MUST BE AT LEAST 28-1/2" WIDE.

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.



