# PGS908SEM

## GE Profile™ 30" Slide-In Gas Range

**Dimensions and Installation Information (in inches)**

**You must use the rear filler strip kit shipped with the range or the optional accessory backguard when installing these ranges**

**Note:** Cabinets installed adjacent to slide-in ranges must have an adhesion spec of at least 194° temperature rating.

**Optional Kits for Slide-In Gas Ranges:**
(Available at additional cost)

**Lower/Side Trim Kits**
JXS56BB - Lower Trim Kit (Black)

**Accessory Backguards**
JXS32SS - Brushed-Chrome Accessory Backguard
JXS37BB - Black Glass Accessory Backguard

**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.

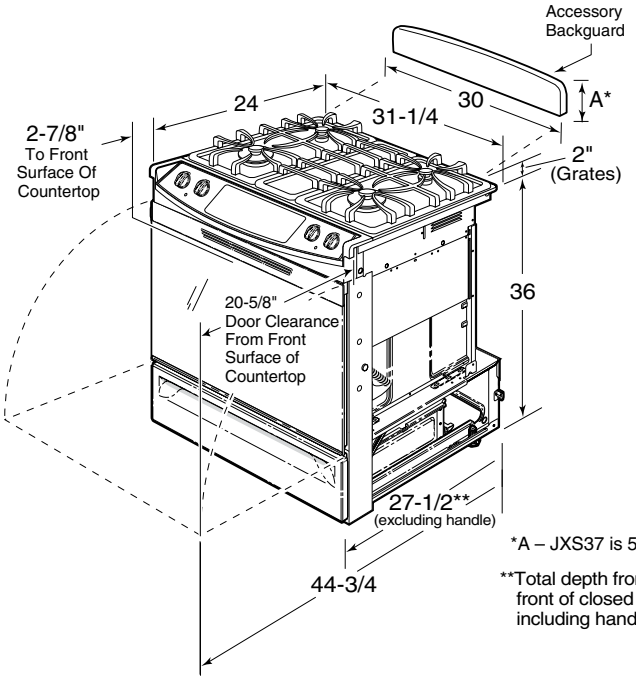


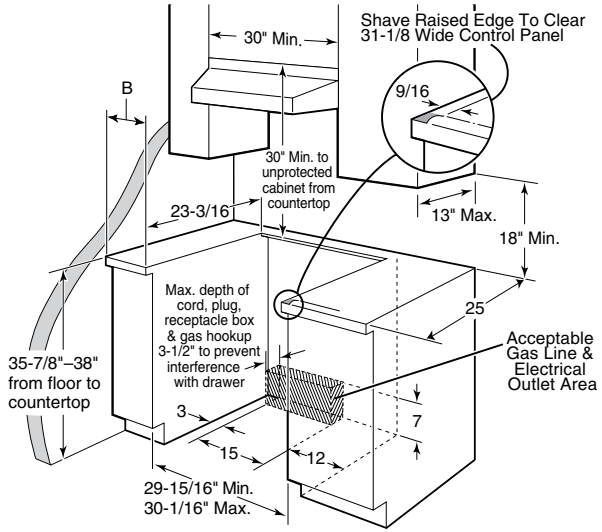


*A – JXS37 is 5-1/4" and JXS32 is 4"

**Total depth from wall to front of closed oven door including handle is 30-1/2.

B is 9-1/2" from walls on either side for P2S975, PGS975 and PGS908 and 6" for PGS968

**Counter Cutout Dimensions (in inches)**

If you are NOT using the Filler strip or Backguard:




If you are using the Filler strip or Backguard:




All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.

imagination at work

**Specification Created 1/07**

230144