PK916SM

GE Profile™ 27" Built-In Single Convection Wall Oven

Dimensions and Installation Information (in inches)

KW Rating		
240V	3.4	
208V	2.6	
Breaker Size		
240V	20 Amps	
208V	20 Amps	

Note: These ovens are *not* approved for stackable or side-by-side installations. These ovens can be installed side-by-side with no less than 30" distance between center-to-center of each oven.


Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating. For 27" built-in single ovens, if marks, blemishes or the cutout opening is visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered. **Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions**.

Note: Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.



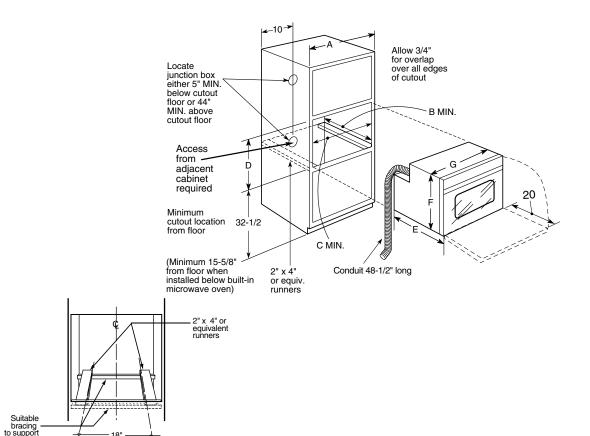

Cabinet	27"
A – Cabinet width required	27" min.
B – Minimum cabinet depth	23-5/8"
C – Opening width	25" min 25-1/4" max
D – Opening height	27-5/8" min 28-1/8" max.
Oven	
E – Overall depth*	23-5/8"
F - Overall height with trim	29-7/8" - 30-3/4"
Overall height without trim	29"
G – Overall width	26-5/8"
*Danth including dass bandle is soon	autimostali (OC 7/40) main ta

Over centerline

of cabinet

