

# PHP900SM

## GE Profile™ 30" Electric Induction Cooktop

### Dimensions and Installation Information (in inches)


KW Rating	
240V	7.7
208V	5.8
Breaker Size	
240V	40 Amps†
208V	40 Amps†

†**Note:** Check local codes for required breaker size

**Important:** Allow 12" minimum vertical clearance between the cooktop bottom and any combustible surfaces. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 36" flexible armored cable.


**Note:** 36" Ribbon cooktops are approved for use over GE 30" Single Wall Ovens and Warming Drawers only. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a GE Profile™ Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft. The countertop must be at least 26" deep with a flat surface area of 23-1/2" or more, front to back. In addition, other clearances to the front edge of the countertop must be considered, especially on raised bullnose countertops. Consult cabinet and countertop manufacturer's specs for flush mount installation prior to install.

**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.

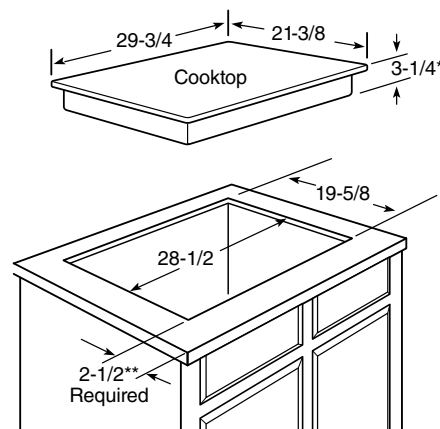

\*Depth of unit at conduit connection location (rear) is 6-1/4" on models PP980/975/950/945 and 4-5/8" on models PHP960/900, PP972/962/942/932/912 and JP6SS/356/346/340.

\*\*Raised bull nose countertops may require up to 3/8" additional clearance to prevent interference with curved front.

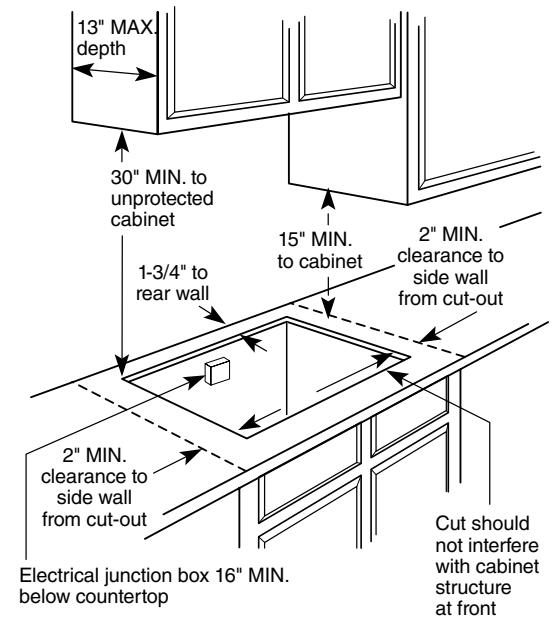

Above illustration intended for dimensional reference only.  
Refer to photograph for actual product appearance.

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at [ge.com](http://ge.com) or call GE Answer Center® service, 800.626.2000.




# PHP900SM

## GE Profile™ 30" Electric Induction Cooktop

### Features and Benefits

- Induction Elements - Powerful yet precise induction elements generate heat directly to the cookware leaving the unused portion of the element unheated and easier to clean
- 11" Element - Offers a large 11" surface, wide enough to handle bigger pots and pans and accommodate family meals of any size
- 11" Element - At it's highest setting, the 11" element has 3700 watts of power, providing an incredibly fast time to boil water
- Electronic Touch Controls - Offer easy, point-and-cook convenience
- 19 Control Settings - Choose from 19 different power levels to select the temperature that is perfect for your meal
- Pan Presence Sensor - Detects when a burner element is left "on" and automatically shuts it off when not in use
- Control Lock Capability - Provides the ability to lock the cooktop's controls, helping protect from unintended activation
- Seamless Appearance - Installs nearly flush with countertop for a seamless appearance
- Electronic Kitchen Timer - Provides convenient notification to help coordinate meal preparation and cooking times
- Stainless Steel Frame - Brings an added touch of style to any decor and perfectly complements all other stainless steel appliances in the kitchen
- Frameless Design - A smooth and seamless cooktop surface makes cleaning quick and easy
- Model PHP900SMSS - Stainless steel

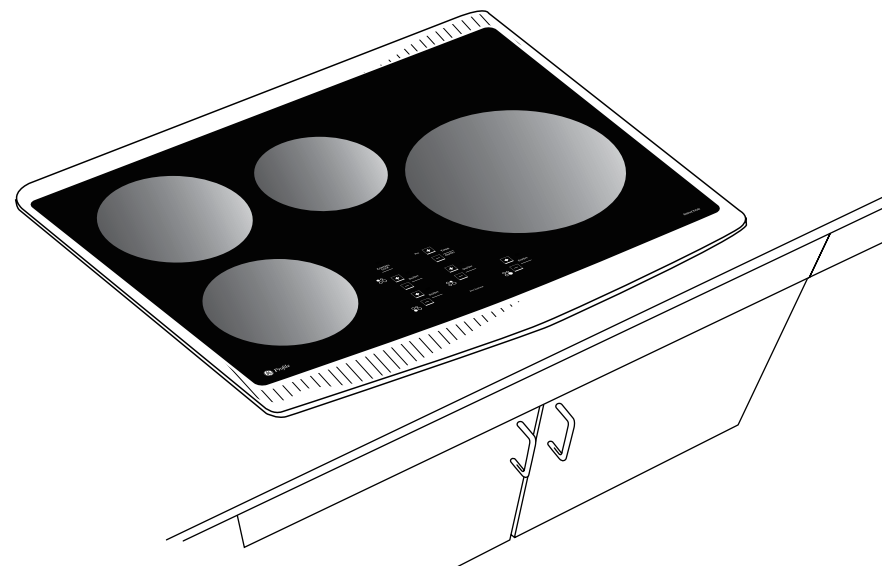

imagination at work