P2B918DEM


GE Profile™ 30" Free-Standing Dual-Fuel Double Oven Range

Dimensions and Installation Information

Note: Dimension from the wall to the front of the closed door handle is 29". Depth to front edge of cooktop 25-1/4". Factory set for Natural Gas. A set of LP orifices is included with each range for LP conversion.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

Electrical Rating: 240V; 60Hz; 40A

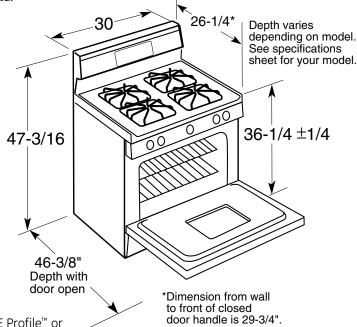

NOTE: Make gas connections on the left side and electrical conections on the right side of the Recommended acceptable cutout opening. electrical outlet area. Orient the electrical receptacle so the length is parallel to the floor. Wall-Mounted Recommended area for through-the-wall connection of pipe stub/shut-off valve. This area allows flush installation 2-1/4 to rear wall. 7-1/2 Product is shipped with 4-prong Recommended area for plug. Recommended outlet is through-the-floor connection of pipe stub/shut-off valve. a NEMA 14-50R receptacle.

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.







