


#### Features

- Acrylic
- Pump with air switch and grounding-type plug-in cord
- 8 color-matched Kohler hydro-massage jets
- Textured bottom surface
- Drop-in
- 60" (1524 mm) x 32" (813 mm) x 20" (508 mm)

#### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASME A112.19.7
- UL 1795
- ASTM E162
- ASTM E662

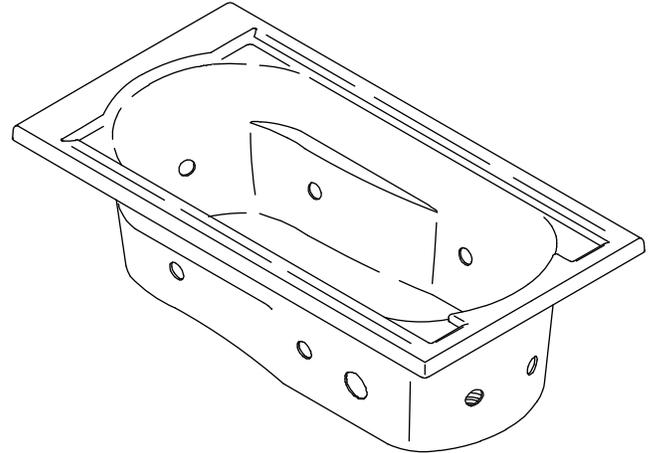

#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

#### Specified Model

| Model  | Description    | Colors/Finishes            |                                     |
|--------|----------------|----------------------------|-------------------------------------|
| K-1357 | Bath whirlpool | <input type="checkbox"/> 0 | <input type="checkbox"/> Other_____ |

| Recommended Accessories |                         |                             |   |
|-------------------------|-------------------------|-----------------------------|---|
| K-7161-AF               | Adjustable pop-up drain | <input type="checkbox"/> CP | <input type="checkbox"/> PB <input type="checkbox"/> Other_____ |

#### Product Specification

The acrylic drop-in bath whirlpool shall be 60" (1524 mm) in length, 32" (813 mm) in width, and 20" (508 mm) in height. Product shall have 8 color-matched Kohler jets and a textured bottom surface. Product shall feature a pump with air switch actuator and grounding-type plug-in cord. Bath whirlpool shall be Kohler Model K-1357-\_\_\_\_\_.

# DEVONSHIRE®

## Technical Information

|   |                              |    |   |
|---|------------------------------|----|---|
| Fixture*:                                       |                              |    |   |
| Basin area:                                     |                              |    |   |
| Bathing well                                    | 42" (1067 mm) x 20" (508 mm) |    |   |
| Top area  | 51" (1295 mm) x 24" (610 mm) |    |   |
| Weight  | 100 lbs (45.4 kg)            |    |   |
| To overflow:                                    |                              |    |   |
| Water depth                                     | 14" (356 mm)                 |    |   |
| Capacity  | 60 gal (227.1 L)             |    |   |
| * Approximate measurements for comparison only. |                              |    |   |
| Pump:   | V                            | Hz | A |
| 1-speed   | 120                          | 60 | 7 |

## Required Electrical Service


|   |                   |
|---|-------------------|
| Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI): |                   |
| Pump/control  | 120 V, 15A, 60 Hz |
| Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.                 |                   |

## Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 47 lbs/square foot (230 kg/square meter) loading.

No change in measurements with drain shown. (K-7161-AF or K-7161M-AF)

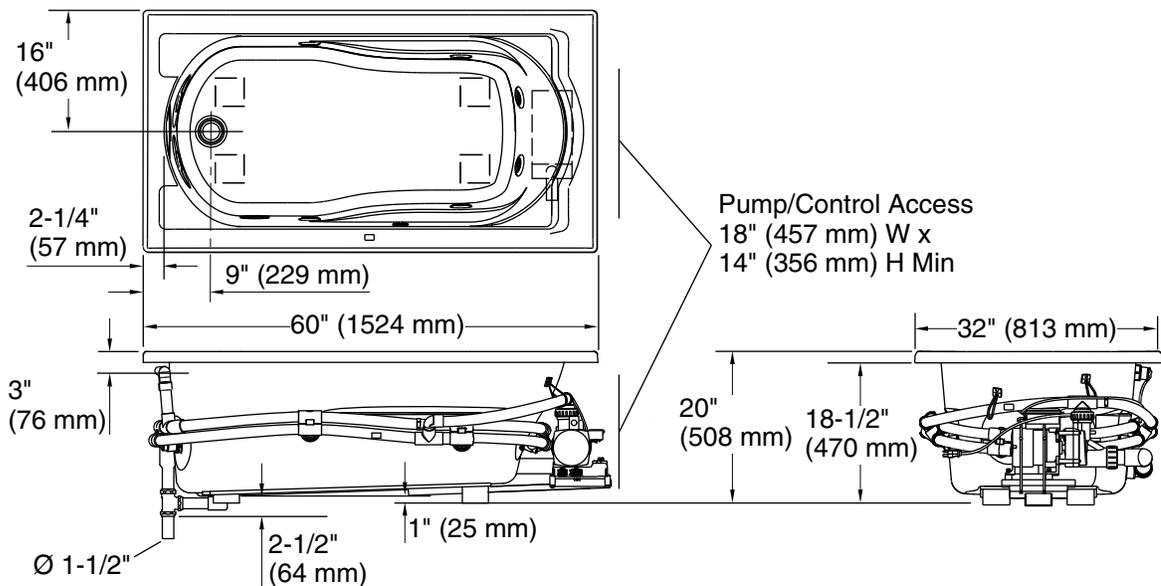

## Product Diagram