

Features


- Acrylic
- Pump with air switch and grounding-type plug-in cord
- In-line heater
- 4 individually adjustable ProFlex® hydro-massage jets
- Oval shape
- Optional K-9694 metal finish 4 jet trim kit
- Drop-in
- 60" (1524 mm) x 42" (1067 mm) x 21" (533 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- UL 1795
- ASTM E162
- ASTM E662
- ASME A112.19.7

BATH WHIRLPOOL WITH HEATER K-1246-H

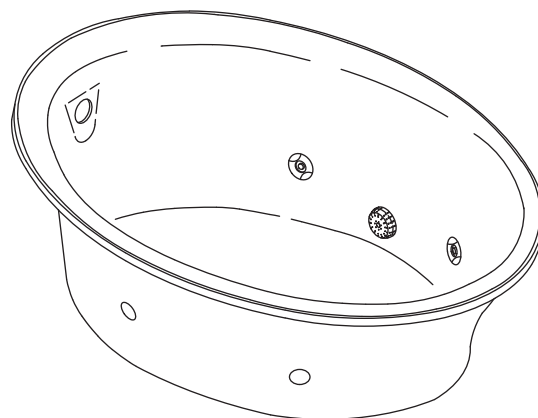

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1246-H	Bath whirlpool with heater – drop-in	☐ 0	☐ Other_____

Recommended Accessories

K-7161-AF	Adjustable pop-up drain	☐ CP	☐ PB	☐ Other_____
K-7213	Clearflo bath cable drain with PVC tubing	☐ CP		☐ Other_____
K-7214	Clearflo bath cable drain without PVC tubing	☐ CP		☐ Other_____

Optional Accessories

K-1491	Pillow	☐ 0			☐ Other_____
K-1601	Footstop	☐ 0			☐ Other_____
K-9694	Jet trim kit (metal finishes)		☐ CP	☐ PB	☐ Other_____

Product Specification

The drop-in acrylic bath whirlpool shall be 60" (1524 mm) in length, 42" (1067 mm) in width, and 21" (533 mm) in height. Product shall have 4 individually adjustable ProFlex hydro-massage jets, a pump with air switch and grounding-type plug-in cord, and an in-line heater. Product shall have an oval shape. Product shall have an optional K-9694 metal finish 4 jet trim kit. Bath whirlpool shall be Kohler Model K-1246-H-_____.

SEASIDE™ 5'

Technical Information

Fixture*:	
Basin area:	
Bathing well	44" (1118 mm) x 31" (787 mm)
Top area	50" (1270 mm) x 34" (864 mm)
Weight	115 lbs (52.2 kg)
To overflow	
Water depth	15" (381 mm)
Capacity	69 gal (261 L)
* Approximate measurements for comparison only.	

Pump:		V	Hz	A
1-speed		120	60	7.5
Heater:	kW	V	Hz	A
	1.5	120	60	12.5

Included components:	
Cut-out template	113926-7

Required Electrical Service


Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Heater	120 V, 15 A, 60 Hz
Locate the outlets behind the whirlpool and within 24" (610 mm) of the pump and heater.	

Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 41 lbs/square foot (200 kg/square meter) loading.

If installing a rim-mount faucet, make sure there is no interference with the drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

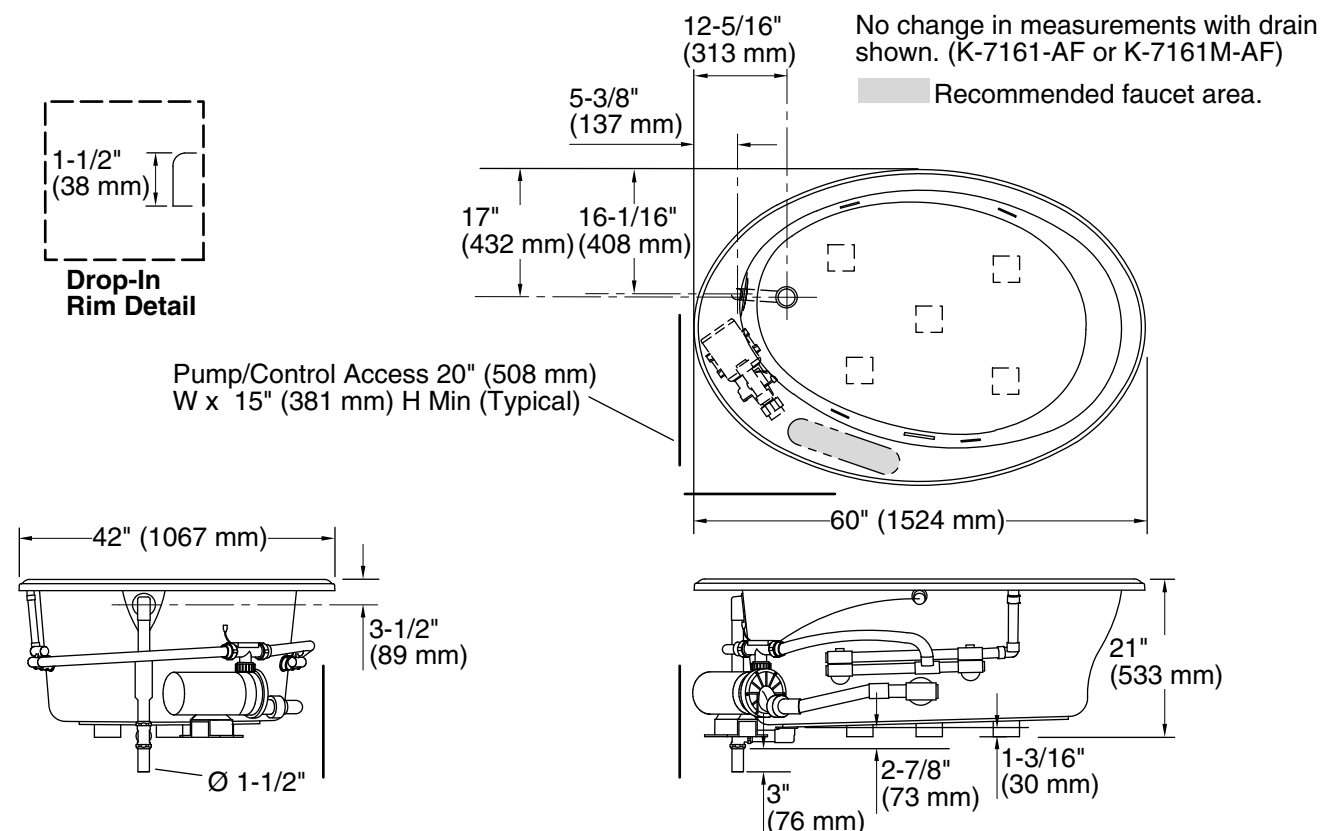

Product Diagram

SEASIDE™ 5' BATH WHIRLPOOL WITH HEATER

Page 2 of 2
1013778-4-D

THE BOLD LOOK
OF **KOHLER**®