

### CUSTOM BATH WHIRLPOOL K-1209-CB


#### Features

- Acrylic
- Drop-in
- Pump with air switch and grounding-type plug-in cord
- Textured bottom surface
- Optional K-9694 metal finish 4 jet trim kit
- Custom pump options
- Four individually adjustable ProFlex® whirlpool jets
- 60" (1524 mm) x 32" (813 mm) x 20" (508 mm)

#### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- ANSI Z124.1.2
- UL 1795
- ASTM E162
- ASTM E662

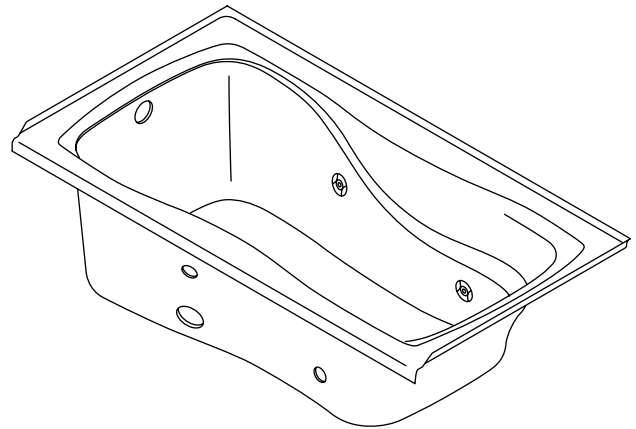

#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

#### Specified Model

| Model                          | Description                     | Colors/Finishes             |                                     |
|--------------------------------|---------------------------------|-----------------------------|-------------------------------------|
| K-1209-CB                      | Custom bath whirlpool – drop-in | <input type="checkbox"/> 0  | <input type="checkbox"/> Other_____ |
| <b>Recommended Accessories</b> |                                 |                             |                                     |
| K-7161-AF                      | Adjustable pop-up drain         | <input type="checkbox"/> CP | <input type="checkbox"/> Other_____ |
| <b>Optional Accessories</b>    |                                 |                             |                                     |
| K-9694                         | Jet trim kit – metal finishes   | <input type="checkbox"/> CP | <input type="checkbox"/> Other_____ |

#### Product Specification

The acrylic drop-in bath whirlpool shall be 60" (1524 mm) in length, 32" (813 mm) in width, and 20" (508 mm) in height. Product shall feature a textured bottom surface. Product shall feature four individually adjustable ProFlex whirlpool jets, a pump with air switch and grounding-type plug-in cord. Product shall have custom pump options. Product shall have an optional K-9694 trim kit in various metal finishes available. Bath whirlpool shall be Kohler Model K-1209-CB-\_\_\_\_\_.

# HOURLASS® 32

## Technical Information

|   |                              |
|---|------------------------------|
| Fixture*:                                       |                              |
| Basin area                                      |                              |
| Basin area bottom                               | 47" (1194 mm) x 20" (508 mm) |
| Basin area top                                  | 53" (1346 mm) x 23" (584 mm) |
| Weight  | 100 lbs (45.4 kg)            |
| To overflow                                     |                              |
| Water depth                                     | 14-1/2" (368 mm)             |
| Capacity  | 64 gal (242.3 L)             |
| * Approximate measurements for comparison only. |                              |

|         |     |    |     |
|---------|-----|----|-----|
| Pump:   | V   | Hz | A   |
| 1-speed | 120 | 60 | 7.5 |

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz

Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.

## Installation Notes

Install this product according to the installation guide.


Floor support under whirlpool must provide for a minimum of 50 lbs/square foot (243 kg/square meter) loading.

If installation rim-mount faucet, make sure there is no inference with the drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet desk.

The apron must be installed before the finished floor and wall materials are installed.


Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

Pump/Control  
Access  
20" (508 mm) W x  
15" (381 mm) H

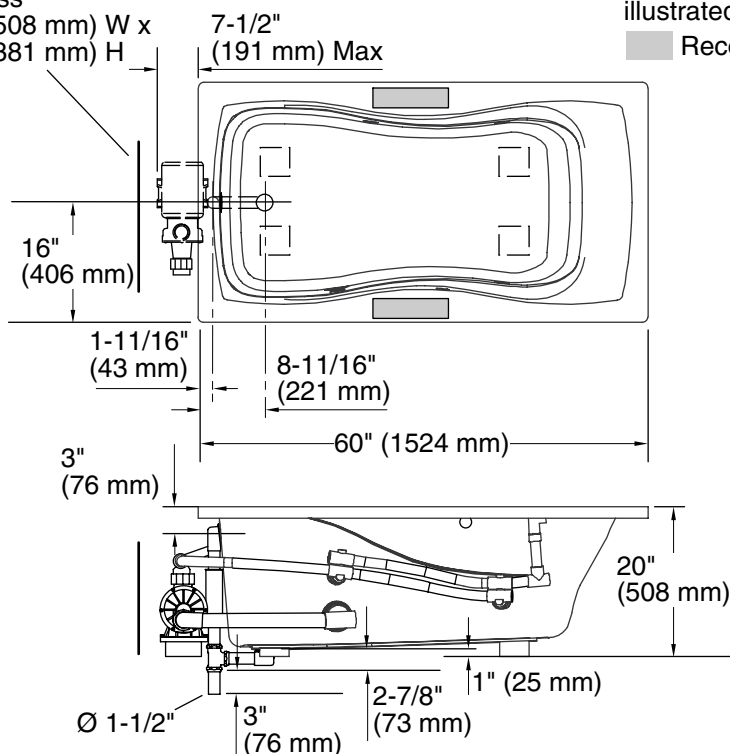


No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

Recommended Faucet Area



Drop-in Rim  
Detail



## Product Diagram