

### Features


- Acrylic
- Drop-in
- 5 individually adjustable ProFlex® hydro-massage jets
- Pump with air switch and grounding-type plug-in cord
- Optional K-9695 metal finish 5 jet trim kit
- Oval shape
- Two custom pump options
- 72" (1829 mm) x 42" (1067 mm) x 21" (533 mm)

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- UL 1795
- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124

### 6' CUSTOM BATH WHIRLPOOL K-1248-CG ALSO K-1248-CN

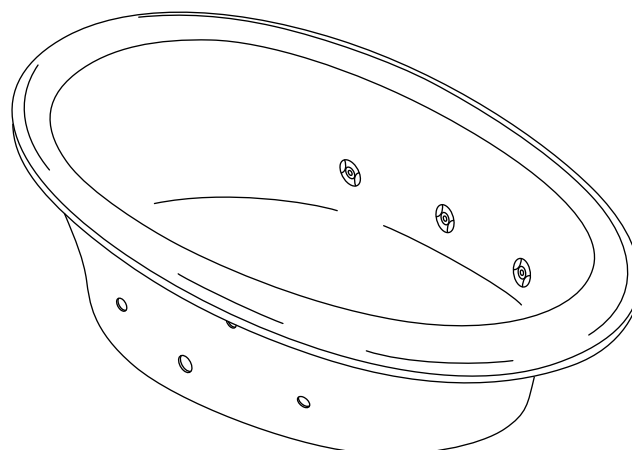

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes		
K-1248-CG	6' custom bath whirlpool – drop-in	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1248-CN	6' custom bath whirlpool – drop-in	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
<b>Recommended Accessories</b>				
K-7161-AF	Adjustable pop-up drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
<b>Optional Accessories</b>				
K-9695	Jet trim kit – metal finishes	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

### Product Specification

The acrylic drop-in bath whirlpool shall be 72" (1829 mm) in length, 42" (1067 mm) in width, and 21" (533 mm) in height. Bath whirlpool shall be oval shaped. Bath whirlpool shall have 5 individually adjustable ProFlex hydro-massage jets, a pump with air switch and grounding-type plug-in cord. Bath whirlpool shall feature two custom pump options. Bath whirlpool shall have an optional K-9695 metal finish 5 jet trim kit. Bath whirlpool shall be Kohler Model K-1248-\_\_\_\_\_-\_\_\_\_\_.

## Technical Information

Fixture*:	
Basin area:	
Bathing well	50" (1270 mm) x 31" (787 mm)
Top area	61" (1549 mm) x 34" (864 mm)
Weight	112 lbs (50.8 kg)
To overflow:	
Water depth	14-1/2" (368 mm)
Capacity	86 gal (325.5 L)
* Approximate measurements for comparison only.	

Included components:			
Cut-out template		113927-7	

Pump:	V	Hz	A
1-speed	120	60	7.5

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.	

## Installation Notes

Install this product according to the installation guide.


Floor support under whirlpool must provide for a minimum of 41 lbs/square foot (198.7 kg/square meter) loading.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

Recommended Faucet Area

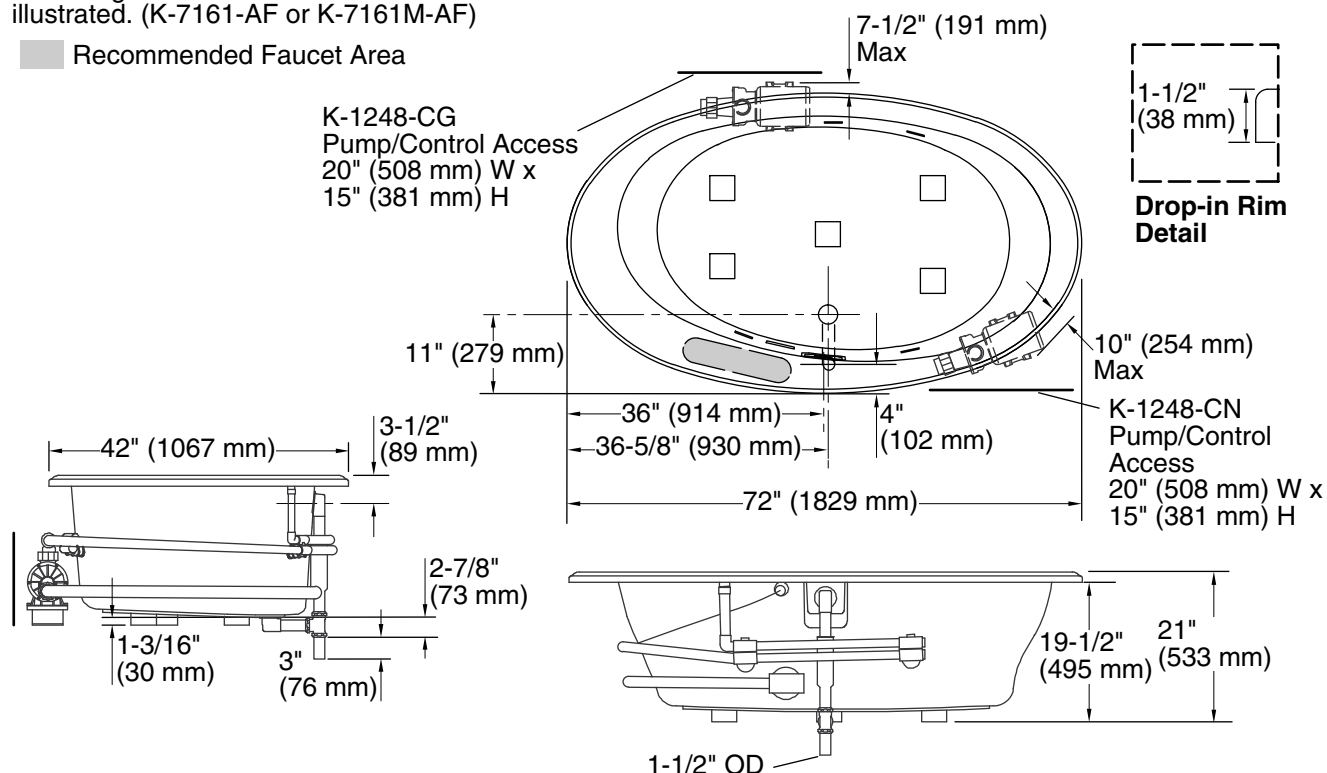

## Product Diagram