

Features

- Acrylic
- Drop-in
- 5 individually adjustable ProFlex® hydro-massage jets
- Pump with air switch and grounding-type plug-in cord
- In-line heater
- Optional K-9695 metal finish 5 jet trim kit
- Oval shape
- Two custom pump options
- 72" (1829 mm) x 42" (1067 mm) x 21" (533 mm)

Codes/Standards Applicable


Specified model meets or exceeds the following:

- ASME A112.19.7
- UL 1795
- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124

6' CUSTOM BATH WHIRLPOOL WITH HEATER

K-1248-HG

ALSO K-1248-HN

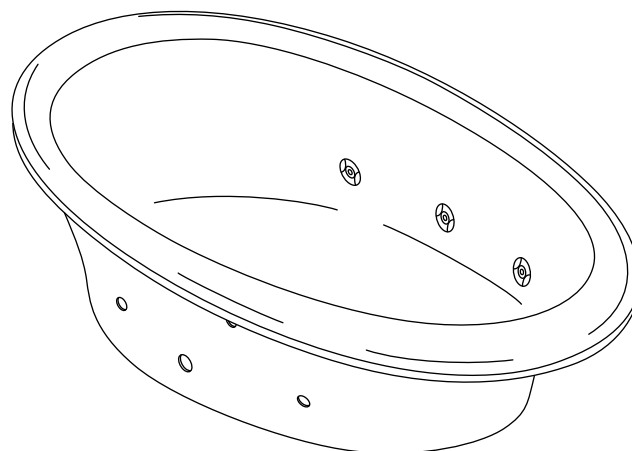

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1248-HG	6' custom bath whirlpool with heater – drop-in	☐ 0	☐ Other_____
K-1248-HN	6' custom bath whirlpool with heater – drop-in	☐ 0	☐ Other_____

Recommended Accessories

K-7161-AF	Adjustable pop-up drain	☐ CP	☐ PB	☐ Other_____
-----------	-------------------------	-----------------------------	-----------------------------	-------------------------------------

Optional Accessories

K-9695	Jet trim kit – metal finishes	☐ CP	☐ PB	☐ Other_____
--------	-------------------------------	-----------------------------	-----------------------------	-------------------------------------

Product Specification

The acrylic drop-in bath whirlpool shall be 72" (1829 mm) in length, 42" (1067 mm) in width, and 21" (533 mm) in height. Bath whirlpool shall be oval shaped. Bath whirlpool shall have 5 individually adjustable ProFlex hydro-massage jets, a pump with air switch and grounding-type plug-in cord, and an in-line heater. Bath whirlpool shall feature two custom pump options. Bath whirlpool shall have an optional K-9695 metal finish 5 jet trim kit. Bath whirlpool shall be Kohler Model K-1248-_____-_____-.

SEASIDE™

Technical Information

Fixture*:	
Basin area:	
Bathing well	50" (1270 mm) x 31" (787 mm)
Top area	61" (1549 mm) x 34" (864 mm)
Weight	117 lbs (53.1 kg)
To overflow:	
Water depth	14-1/2" (368 mm)
Capacity	86 gal (325.5 L)
* Approximate measurements for comparison only.	

Included components:	
Cut-out template	113927-7

Pump:		V	Hz	A
1-speed		120	60	7.5
Heater:	kW	V	Hz	A
	1.5	120	60	12.5

Required Electrical Service

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control	120 V, 15 A, 60 Hz
Heater	120 V, 15 A, 60 Hz

Locate the outlets behind the whirlpool and within 24" (610 mm) of the pump and heater.

Installation Notes

Install this product according to the installation guide.


Floor support under whirlpool must provide for a minimum of 41 lbs/square foot (200 kg/square meter) loading.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

■ Recommended Faucet Area

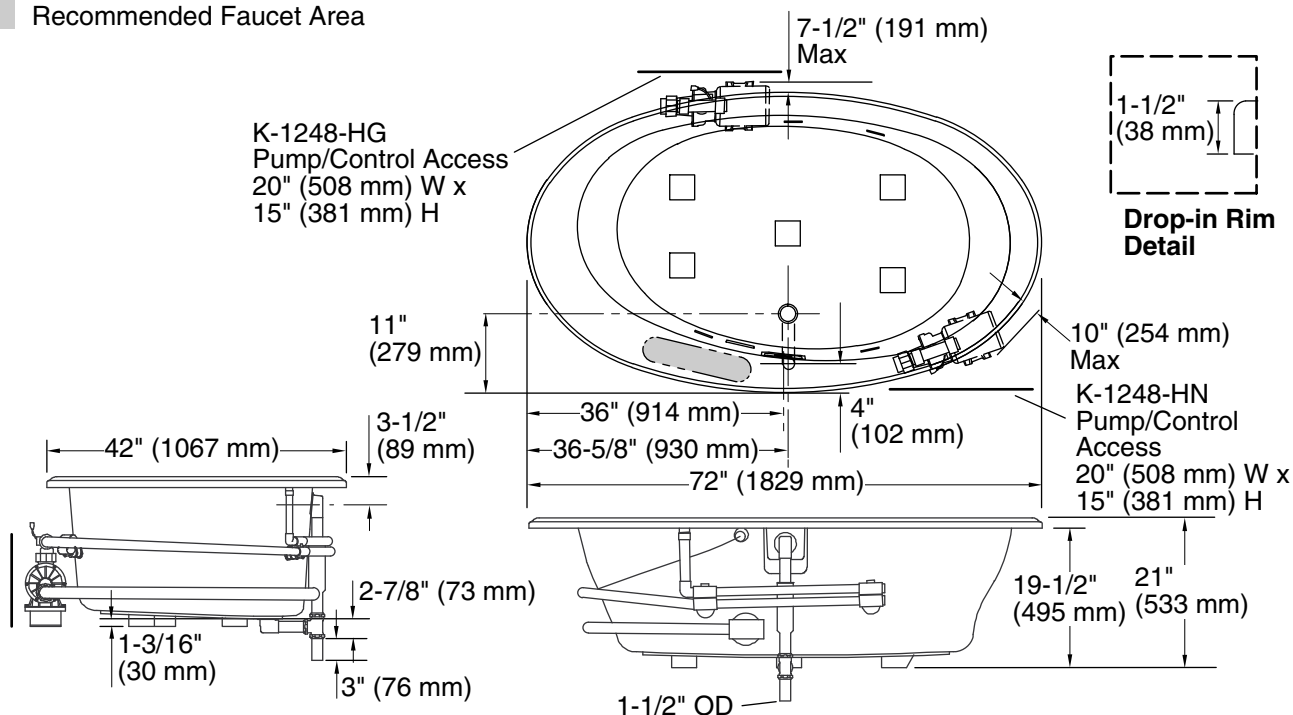

Product Diagram

SEASIDE™ 6' CUSTOM BATH WHIRLPOOL WITH HEATER

Page 2 of 2
1014779-4-E

THE BOLD LOOK
OF **KOHLER**®