


Features

- Acrylic
- Drop-in or three-wall alcove
- Pump with air switch and grounding-type plug-in cord
- 6 individually adjustable ProFlex® hydro-massage jets
- Molded lumbar supports and armrests
- Optional K-9696 whirlpool trim kit in various finishes
- Optional K-1284 separate apron
- 60" (1524 mm) x 42" (1067 mm) x 18-1/8" (460 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- ASTM E162
- ASTM E662
- UL 1795
- CSA B45.5/IAPMO Z124

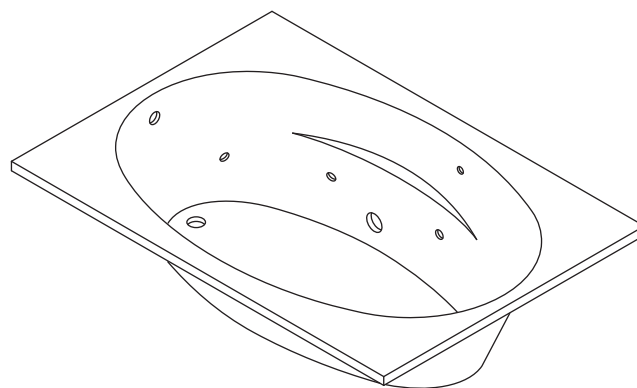

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes
K-1126-CN	Bath whirlpool – drop-in, custom pump	☐ 0 ☐ Other_____

Recommended Accessories

K-7213	Clearflo bath cable drain with PVC tubing	☐ CP	☐ Other_____
K-7214	Clearflo bath cable drain without PVC tubing	☐ CP	☐ Other_____
K-11677	Swiftflo™ bath drain	☐ CP ☐ PB	☐ Other_____

Optional Accessories

K-1284	Separate apron	☐ 0 ☐ Other_____
--------	----------------	--

Product Specification

The acrylic bath whirlpool shall be 60" (1524 mm) in length, 42" (1067 mm) in width, and 18-1/8" (460 mm) in height. Bath whirlpool shall be drop-in or three-wall alcove installation. Bath whirlpool shall have 6 individually adjustable ProFlex® hydro-massage jets, a pump with air switch and grounding-type plug-in cord. Bath whirlpool shall have molded lumbar supports and armrests. Bath whirlpool shall have an optional K-1284 separate apron and an optional K-9696 whirlpool trim kit in various finishes. Bath whirlpool shall be Kohler Model K-1126-CN-_____.

PROFLEX® 6042

Optional Accessories

K-1491	Pillow	☐ 0			☐ Other _____
K-1601	Footstop	☐ 0			☐ Other _____
K-9696	Jet trim kit (metal finishes)		☐ CP	☐ PB	☐ Other _____

Technical Information

Fixture*:	
Basin area:	
Bathing well	46" (1168 mm) x 21" (533 mm)
Top area	55" (1397 mm) x 31" (787 mm)
Weight	67-1/2 lbs (30.6 kg)
To overflow:	
Water depth	14" (356 mm)
Capacity	57 gal (215.8 L)
Drop-in cut-out	58-1/4" (1480 mm) x 40-1/2" (1029 mm)
* Approximate measurements for comparison only.	

Pump:	V	Hz	A
1-speed	120	60	7.5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz

Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.

Installation Notes


Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 33 lbs/square foot (159 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

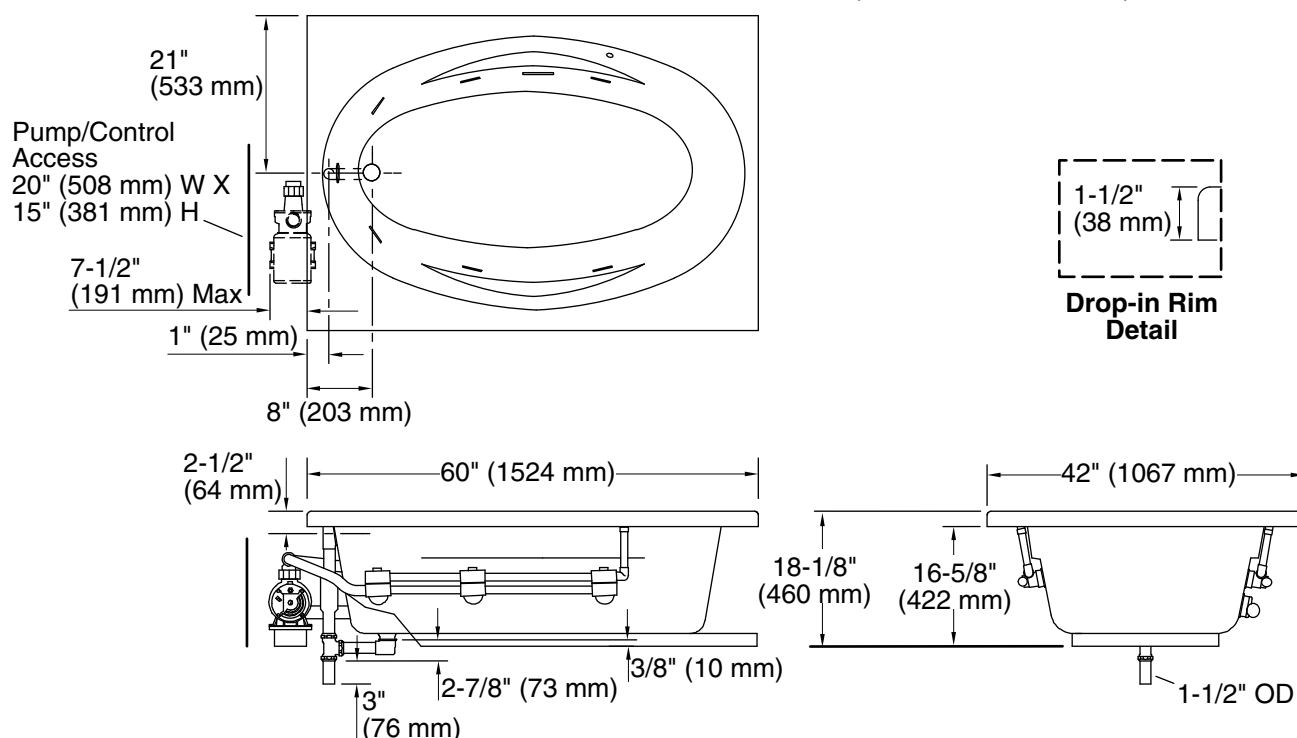

Product Diagram